OpenMV® LCD Shield

Datasheet

SKU: OMV-SHIELD-LCD-V1

Description

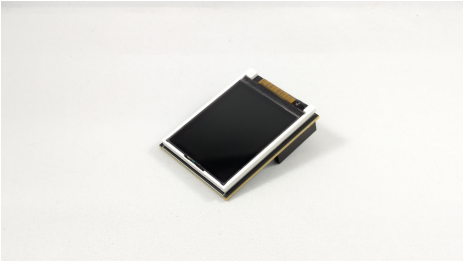

The LCD Shield gives your OpenMV Cam the ability to display what it sees on the go while not connected to your computer. It features a 1.8-inch 128x160 16-bpp (RGB565) TFT LCD display with a controllable backlight. Your OpenMV Cam's firmware has built-in support for controlling the LCD Shield using the SPI Display Class.

Target Areas

Portable display, field demos, on-device preview, debugging, HMI.

Key Features

- **1.8" TFT LCD** — 128x160 pixel, 16-bit color (RGB565).
- **Controllable backlight** — Software-controllable backlight brightness.
- **Built-in firmware support** — Controlled via the SPI Display Class in MicroPython.

Contents

1 Features

1.1 Display

1.2 Compatibility

2 General Info

3 Company Information

4 Reference Documentation

5 Revision History

1 Features

1.1 Display

Component	Details
Screen	1.8-inch TFT LCD, 128x160 pixels, 16-bit color (RGB565).
Backlight	Controllable backlight brightness.
Interface	SPI connection to OpenMV Cam. Controlled via the SPI Display Class.

1.2 Compatibility

Component	Details
Supported Cameras	All OpenMV Cam models.

2 General Info

Dimension	Value
Weight	35 g

3 Company Information

Field	Details
Website	https://openmv.io

4 Reference Documentation

Reference	Link / Document
Product Page	https://openmv.io/products/lcd-shield
SPI Display Class	https://docs.openmv.io/library/omv.display.spidisplay.html
Documentation	https://docs.openmv.io

5 Revision History

Date	Revision	Changes
2026-04-04	Rev 1	Initial public release.