OpenMV® Proto Shield

Datasheet

SKU: OMV-SHIELD-PROTO-V1

Description

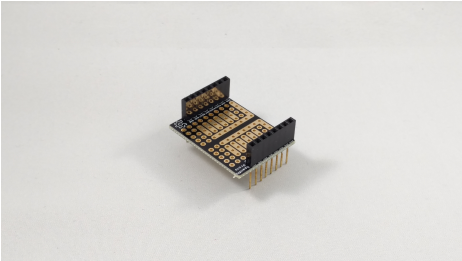

The Proto Shield gives you the ability to easily extend your OpenMV Cam's functionality. It features a 10x10 through-hole prototyping area with a 3.3 V rail and a GND rail connected to your OpenMV Cam's 3.3 V and GND rails. The rest of the I/O pins are left unconnected to let you build what you want.

Target Areas

Prototyping, custom circuits, sensor integration, one-off builds, education.

Key Features

- **10x10 prototyping area** — Through-hole prototyping grid for custom circuits.
- **Power rails** — 3.3 V and GND rails connected to your OpenMV Cam.
- **Open I/O** — I/O pins left unconnected for maximum flexibility.

Contents

1 Features

1.1 Prototyping Area

1.2 Compatibility

2 General Info

3 Company Information

4 Reference Documentation

5 Revision History

1 Features

1.1 Prototyping Area

Component	Details
Grid	10x10 through-hole prototyping area.
Power	3.3 V rail and GND rail connected to OpenMV Cam.
I/O	All I/O pins left unconnected for custom wiring.

1.2 Compatibility

Component	Details
Supported Cameras	All OpenMV Cam models.

2 General Info

Dimension	Value
Weight	20 g

3 Company Information

Field	Details
Website	https://openmv.io

4 Reference Documentation

Reference	Link / Document
Product Page	https://openmv.io/products/proto-shield
Documentation	https://docs.openmv.io

5 Revision History

Date	Revision	Changes
2026-04-04	Rev 1	Initial public release.