OpenMV® QWIIC Shield

Datasheet

SKU: OMV-SHIELD-QWIIC

Description

The QWIIC Shield allows your OpenMV Cam to easily connect to SparkFun's plethora of QWIIC devices. It connects P4 (SCL) and P5 (SDA) on your OpenMV Cam to the dual QWIIC headers onboard, which can be used to daisy-chain your OpenMV Cam into a QWIIC (I2C) bus. The shield does not feature pull-up resistors — you need to enable these via software on your OpenMV Cam or provide them externally.

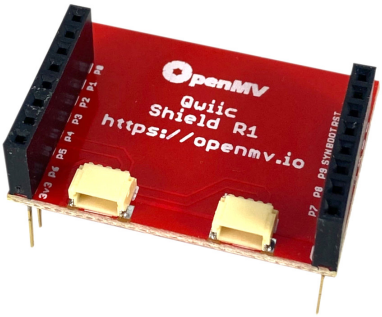

Target Areas

I2C sensor integration, QWIIC ecosystem, rapid prototyping, sensor daisy-chaining.

Key Features

- **Dual QWIIC headers** — Two QWIIC I2C connectors for daisy-chaining SparkFun QWIIC peripherals.
- **P4/P5 connection** — Connects to P4 (SCL) and P5 (SDA) on your OpenMV Cam.
- **No pull-ups** — No onboard pull-up resistors. Enable via software or provide externally.

Contents

1 Features

1.1 I2C / QWIIC

1.2 Compatibility

2 General Info

3 Company Information

4 Reference Documentation

5 Revision History

1 Features

1.1 I2C / QWIIC

Component	Details
Connectors	Dual QWIIC headers for daisy-chaining. Compatible with SparkFun QWIIC ecosystem.
Pins	P4 (SCL) and P5 (SDA).
Pull-ups	No onboard pull-up resistors. Must be enabled via software (e.g., machine.Pin.PULL_UP) or provided externally.

1.2 Compatibility

Component	Details
Supported Cameras	All OpenMV Cam models.

2 General Info

Dimension	Value
Weight	5 g

3 Company Information

Field	Details
Website	https://openmv.io

4 Reference Documentation

Reference	Link / Document
Product Page	https://openmv.io/products/qwiic-shield
SparkFun QWIIC	https://www.sparkfun.com/qwiic
Documentation	https://docs.openmv.io

5 Revision History

Date	Revision	Changes
2026-04-04	Rev 1	Initial public release.