OpenMV® Wireless TV Shield

Datasheet

SKU: OMV-WIRELESS-TV-SHIELD-V1

Description

The Wireless TV Shield gives your OpenMV Cam a way to wirelessly transmit video at high speed over a long range. It works using a SPI to NTSC chip attached to a 5.8 GHz analog broadcast chip. The Wireless TV Shield is as easy to use as the LCD Shield and only requires init() followed by display() calls. Built-in firmware support and example code included.

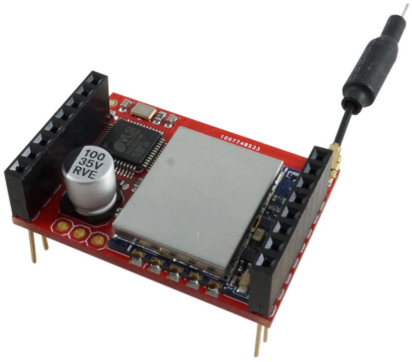

Target Areas

FPV video, wireless video transmission, drone video, long-range video link, remote monitoring, RC vehicle video.

Key Features

- **5.8 GHz wireless video** — High-speed long-range analog video broadcast via 5.8 GHz transmitter.
- **NTSC output** — SPI to NTSC conversion, then 5.8 GHz broadcast.
- **Simple API** — init() + display() — same as LCD and TV Shields.
- **Built-in support** — Firmware support and example code included in OpenMV IDE.

Contents

1 Features

1.1 Wireless Video

1.2 Compatibility

2 General Info

3 Company Information

4 Reference Documentation

5 Revision History

1 Features

1.1 Wireless Video

Component	Details
Transmitter	5.8 GHz analog broadcast chip for long-range wireless video.
Video Standard	SPI to NTSC conversion, then 5.8 GHz broadcast.
API	tv.init() and tv.display() in MicroPython. See TV Module documentation.

1.2 Compatibility

Component	Details
Supported Cameras	All OpenMV Cam models.

2 General Info

Dimension	Value
Weight	20 g

3 Company Information

Field	Details
Website	https://openmv.io

4 Reference Documentation

Reference	Link / Document
Product Page	https://openmv.io/products/wireless-tv-shield
TV Module Docs	http://docs.openmv.io/library/omv.tv.html
Documentation	https://docs.openmv.io

5 Revision History

Date	Revision	Changes
2026-04-04	Rev 1	Initial public release.