




USB charger + power path

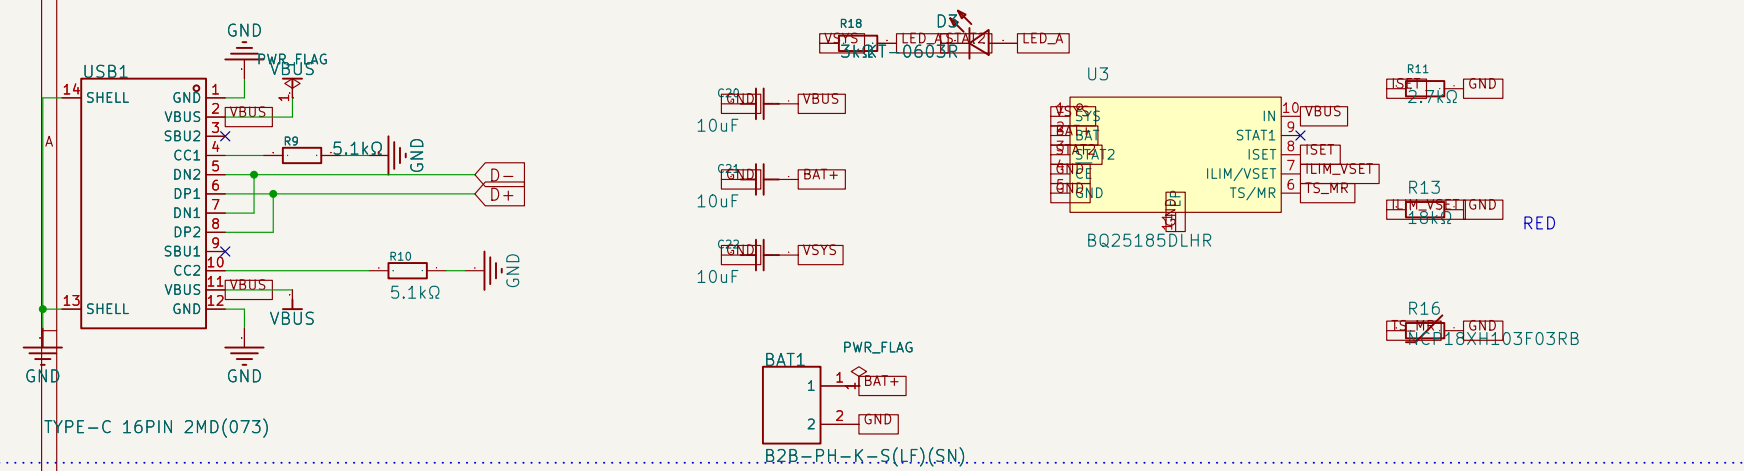


A close-up of the ESP32 pin headers. Pin 3 is highlighted with a red circle. A red line indicates a connection from pin 3 to the 'Pin 3' terminal of a 3-pin header. A green line indicates a connection from pin 3 to the 'Pin 2' terminal of a 3-pin header. A blue line indicates a connection from pin 3 to the 'Pin 1' terminal of a 3-pin header. A yellow line indicates a connection from pin 3 to the 'Pin 4' terminal of a 3-pin header. A red 'X' is drawn over the 'Pin 1' terminal of the 3-pin header.

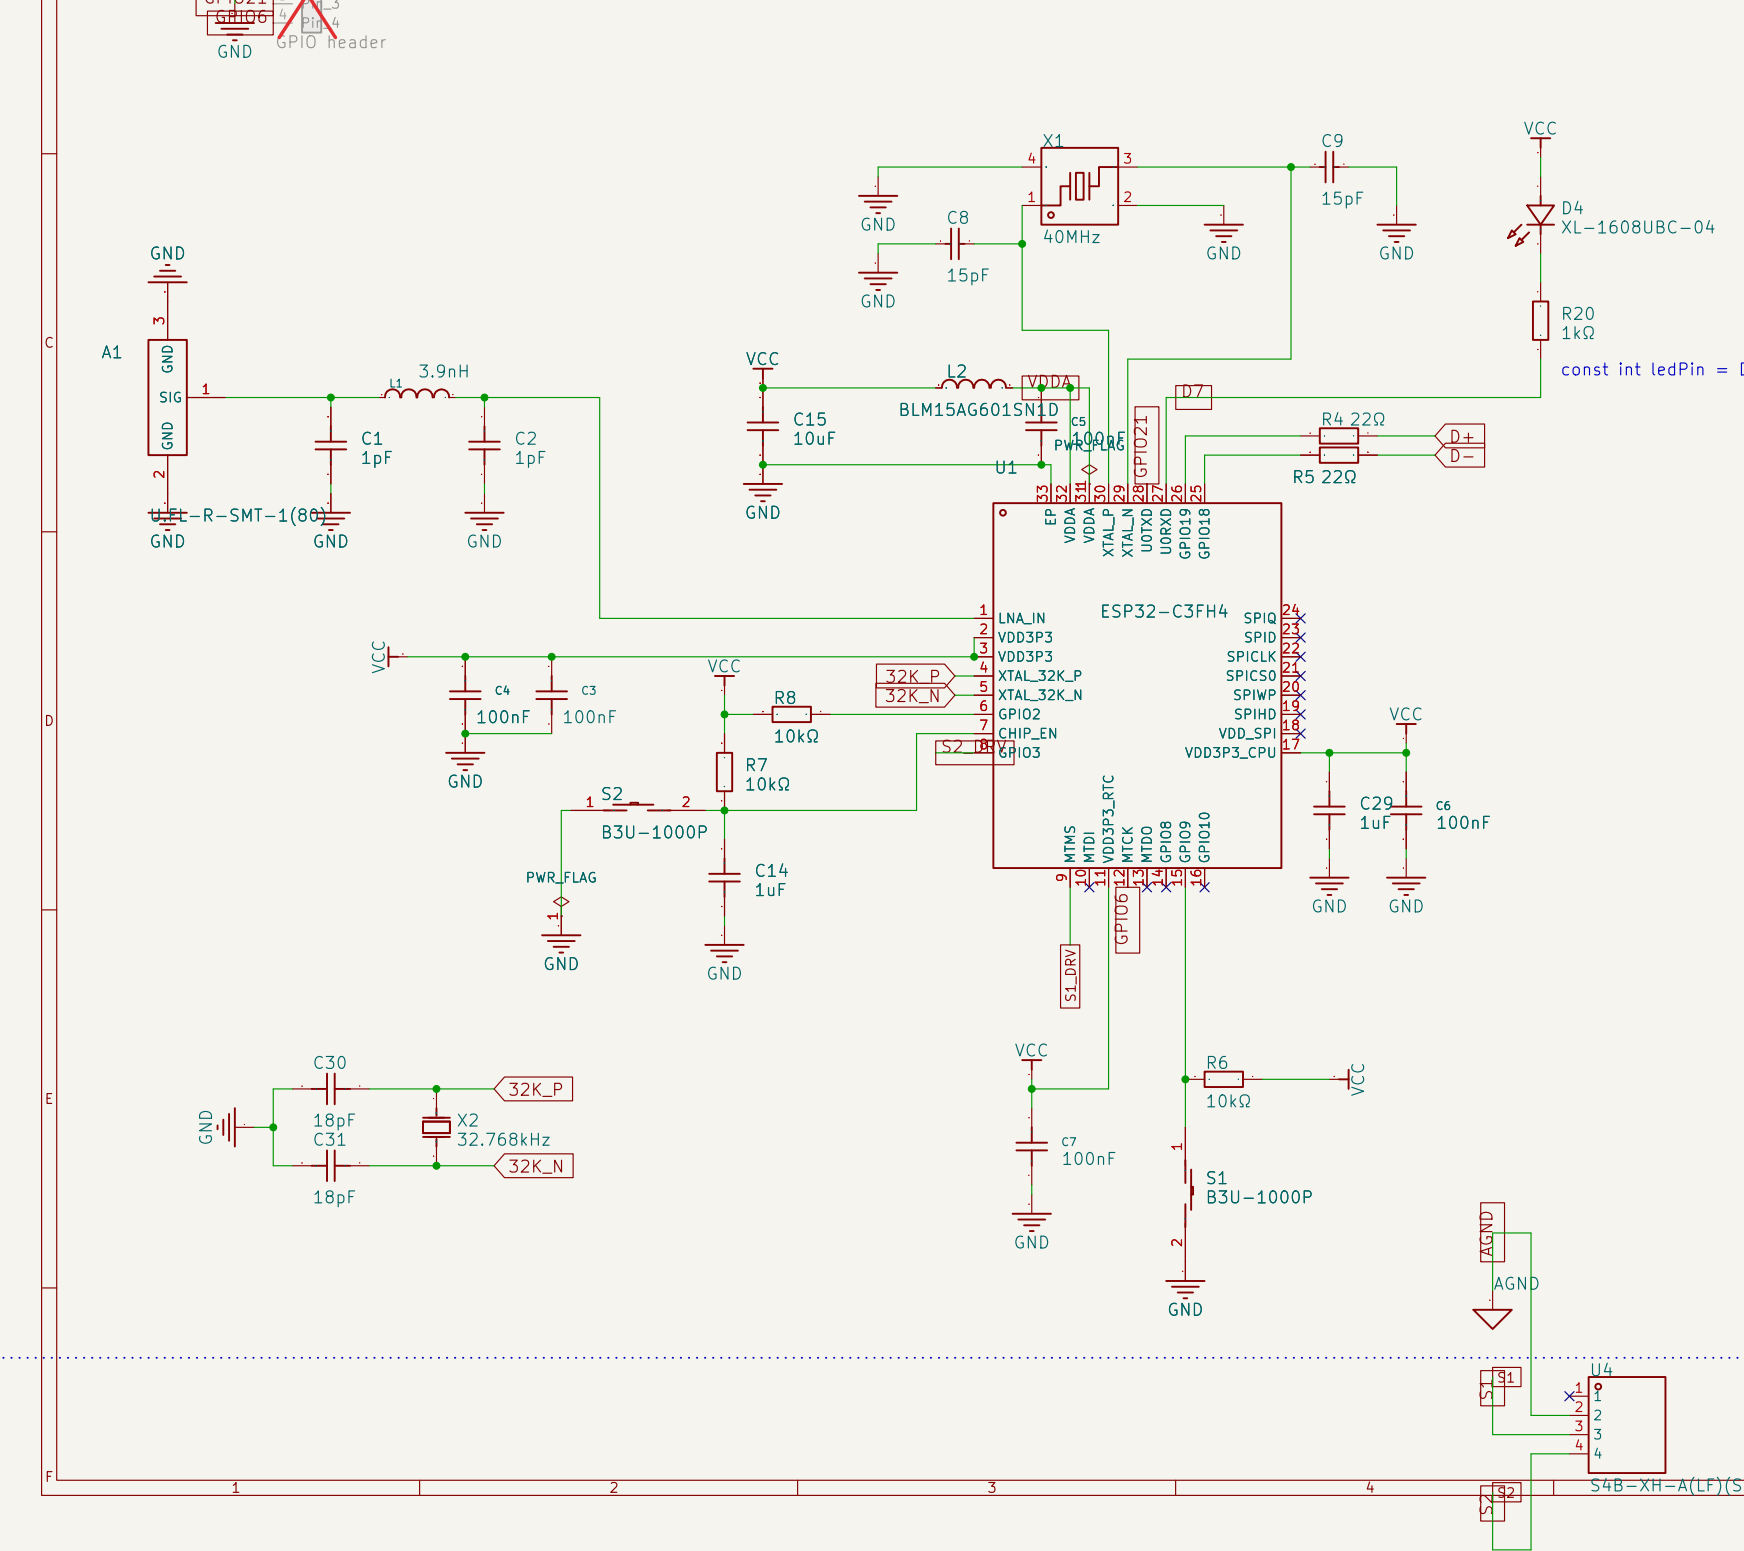

3.3V buck-boost⁶

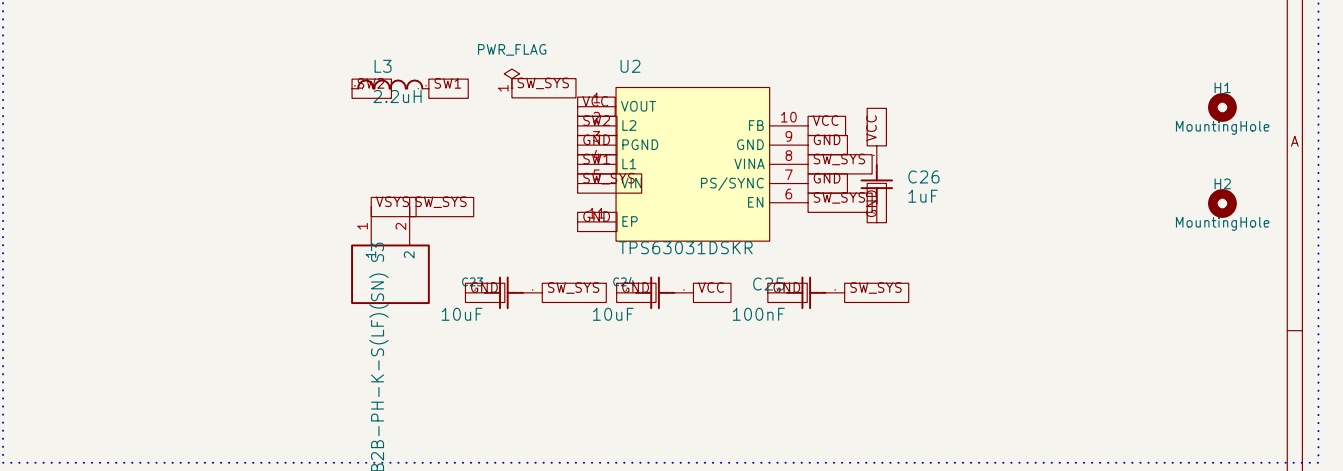

- 2x PhotoMOS

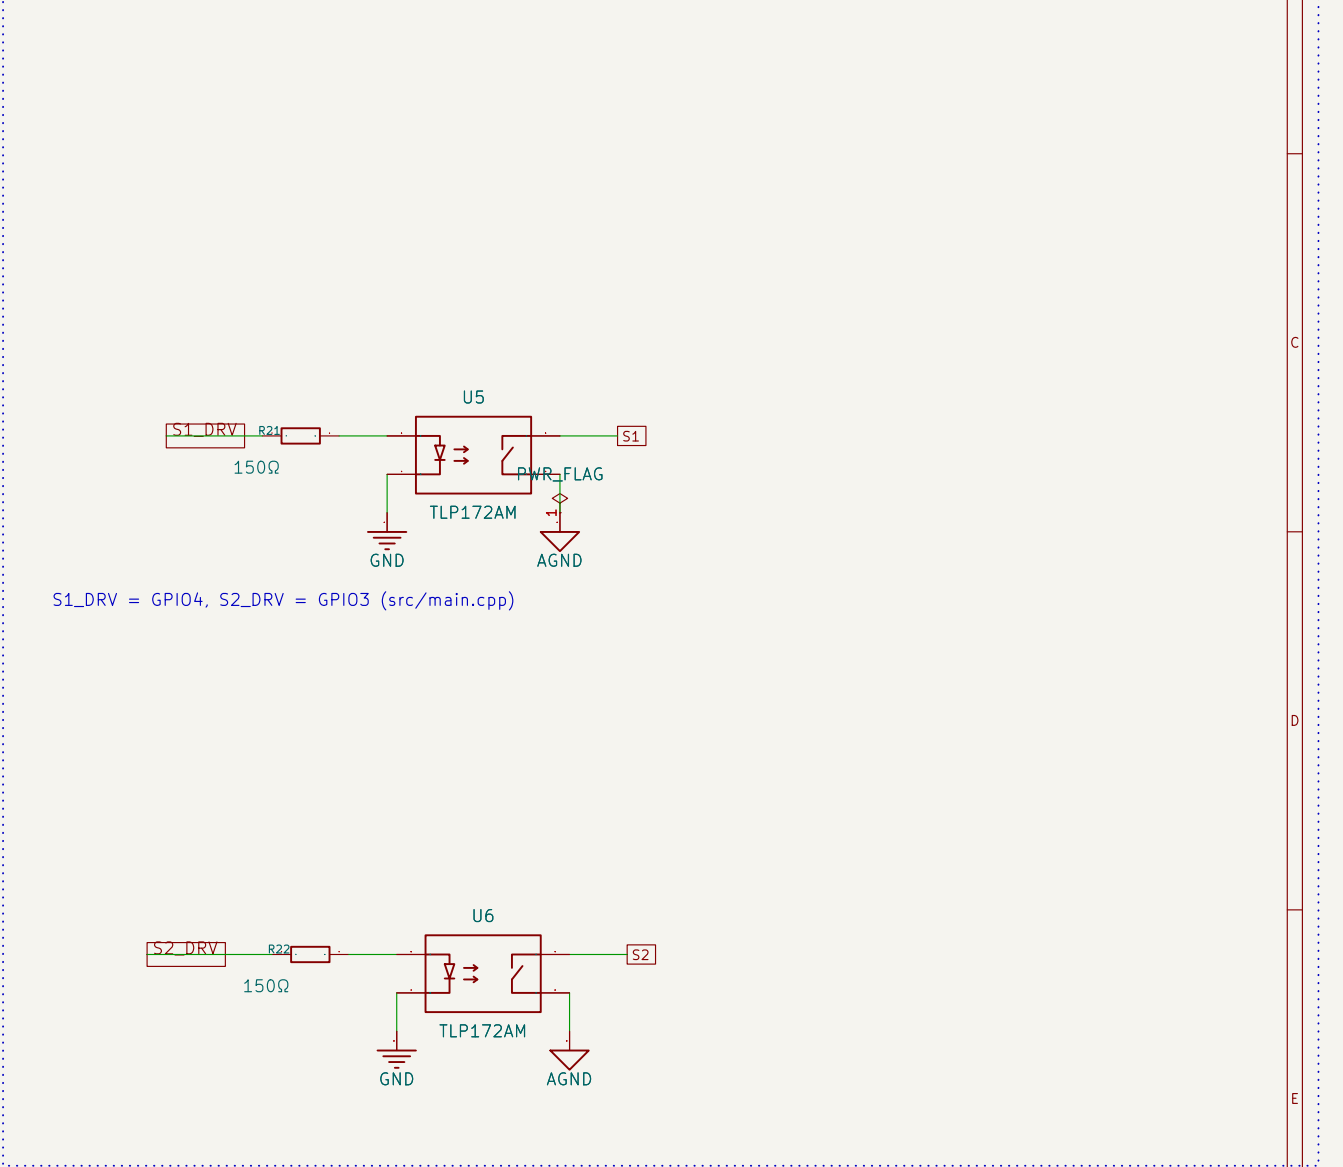

Ported from EasyEDA Pro project ESP32C3CameraTrigger 2026-09-02 (rev with side-entry U4)	
Sheet: /	
File: openrz67.kicad_sch	
Title: OpenRZ67 camera trigger	
Size: User	Rev: 2
Date: 2026-09-03	Id: 1/1
KiCad E.D.A. 10.0.6	