MCU / 64MHz HSI + HSI48 USB

USB-C + ESD + VBUS detection

TWO PARALLEL POWERED CAN PORTS


12V local branch + reverse polarity + ideal-diode OR + TVS + 3V3

Reset defaults to CAN standby. Gateway firmware enables CAN FD after initialization.

No onboard 120R termination. Fit endpoint plugs at the unused gateway port and final module port.

4P4C: 1 BUS_12V / 2 CAN_H / 3 CAN_L / 4 GND. Qualify straight-through cable. NOT telephone compatible.

GATEWAY: USB CDC/HID + ONE PASSIVE CAN TRUNK

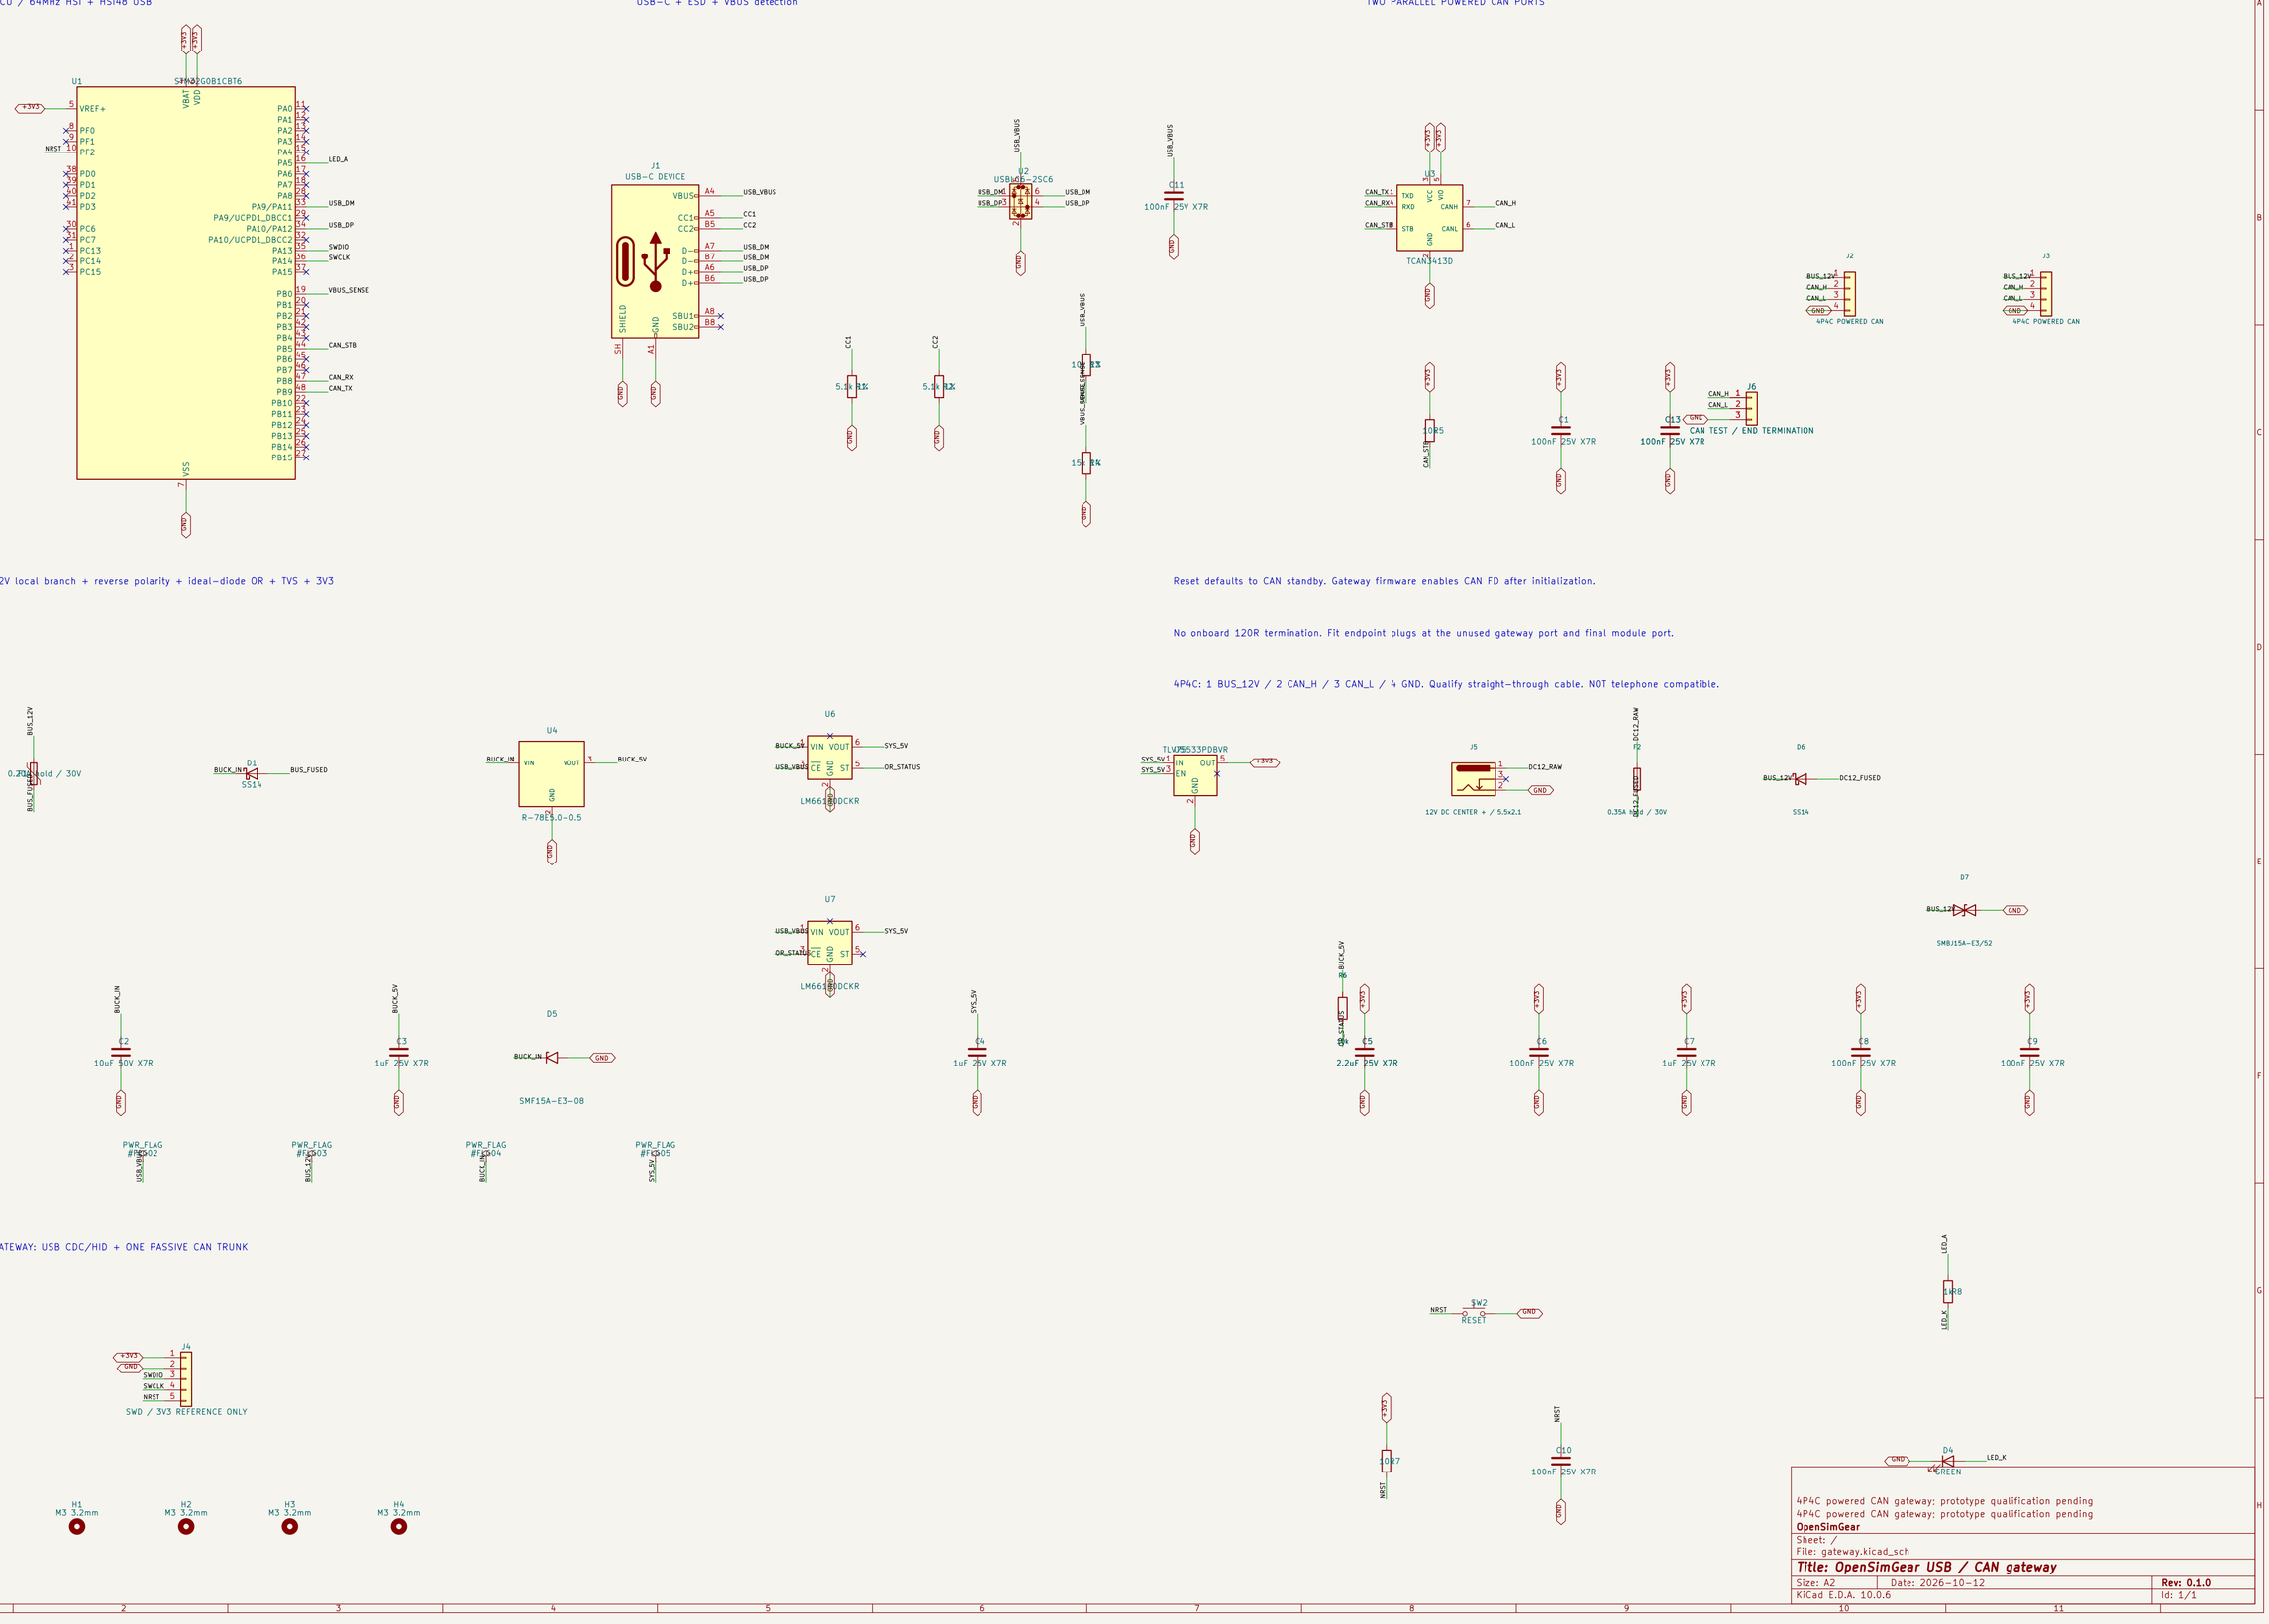

4P4C powered CAN gateway: prototype qualification pending
4P4C powered CAN gateway: prototype qualification pending

OpenSimGear

Sheet: /
File: gateway.kicad_sch

Title: OpenSimGear USB / CAN gateway

Size: A2	Date: 2026-10-12	**Rev: 0.1.0**
KiCad E.D.A. 10.0.6		Id: 1/1