


MCU / 64MHz HSI + HSI48 USB

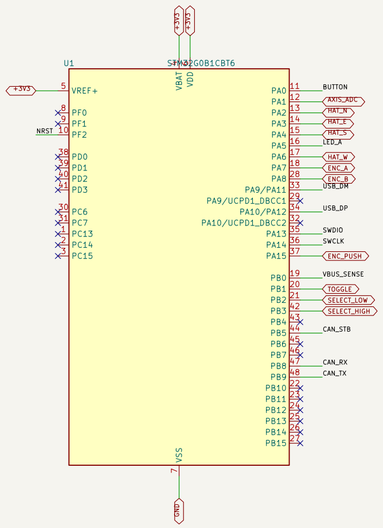


USB-C + ESD + VBUS detection

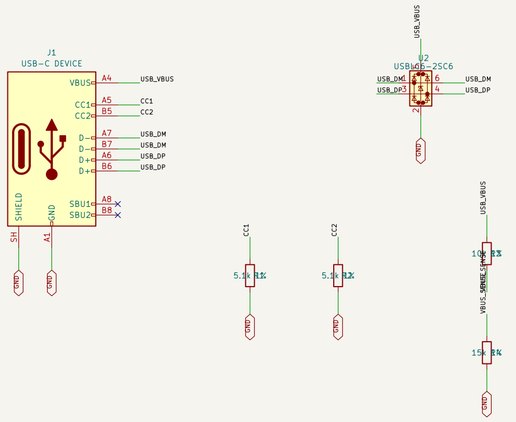

TWO PARALLEL POWERED CAN PORTS

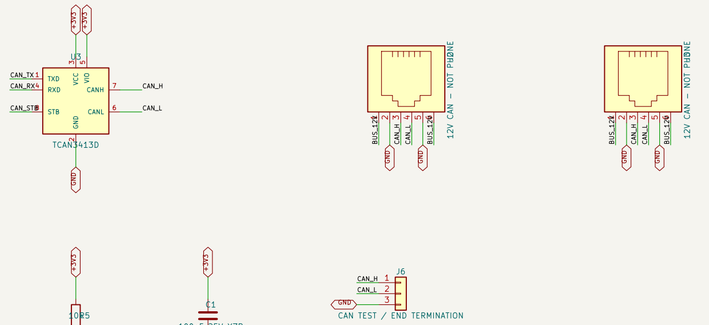

12V local branch + reverse polarity + diode OR + 3V3




Input examples

File: inputs.kicad_sch


Prototype: no Cyphal traffic; transceiver remains in standby.

No onboard 120R termination. Use an end plug at the final module.


Connector pinout is provisional. NOT telephone/Ethernet compatible.

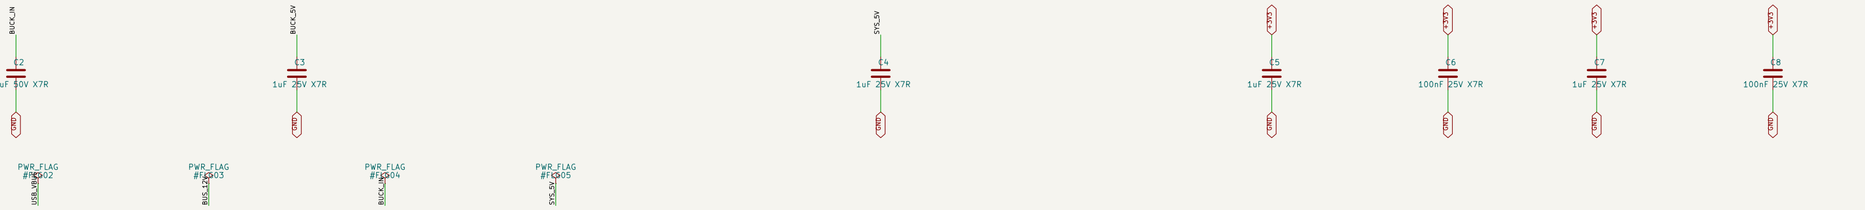

SWD and physical test input







RJ12 pinout provisional; use qualified straight-through cable only
UNROUTED PROTOTYPE – NOT FOR FABRICATION


OpenSimGear

Sheet: /
File: starter.kicad_sch


Title: OpenSimGear STM32G0B1 starter

Size: A2	Date: 2026-10-11	**Rev: A draft**
KiCad E.D.A. 10.0.6		Id: 1/2

One linear axis: V+, wiper, ground. Bias centers an unplugged input.












Four active-low contacts form one 8-way hat; adjacent pairs are diagonals.



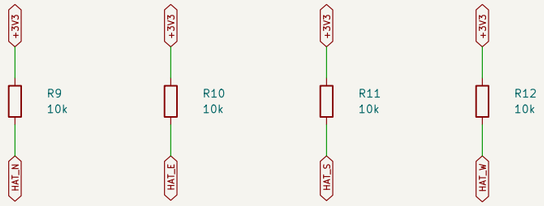

One 4-transition-per-detent encoder, idle AB open; push is a separate button.














One maintained toggle and one center-open three-position selector.











External controls connect to labeled headers; 3.3V only

Sheet: /Input examples/
File: inputs.kicad_sch

Title: OpenSimGear input examples

Size: A3	Date: 2026-10-11	**Rev: A draft**
KiCad E.D.A. 10.0.6		Id: 2/2