




POWER&USBPD
POWER&USB
MCU
KEY
RST
XTAL
PIN
LED
ETH
U2
CH32H417MEU6
If VIO18 is below 1.8V, the Ethernet port indicator circuit needs to be revised.
The Ethernet port LED cannot work.
To prevent current backflow,do not populate resistor R21 and R22.



POWER&USBPD
POWER&USB
MCU
XTAL
KEY
RST
PIN
LED
ETH
@VDD33 power
@VDDIO power
@VIO18 power
@VDD12 power
@VDD33&VBAT power
If VIO18 is below 1.8V, the Ethernet port indicator circuit needs to be revised.
The Ethernet port LED cannot work.
To prevent current backflow,do not populate resistor R21 and R22.


POWER&USB
MCU
XTAL
KEY
PIN
LED
ETH
@VDD33 power
@VDDIO power
@VIO18 power
@VDD12 power
If VIO18 is below 1.8V, the Ethernet port indicator circuit needs to be revised.
The Ethernet port LED cannot work.
To prevent current backflow,do not populate resistor R21 and R22.


USBSS

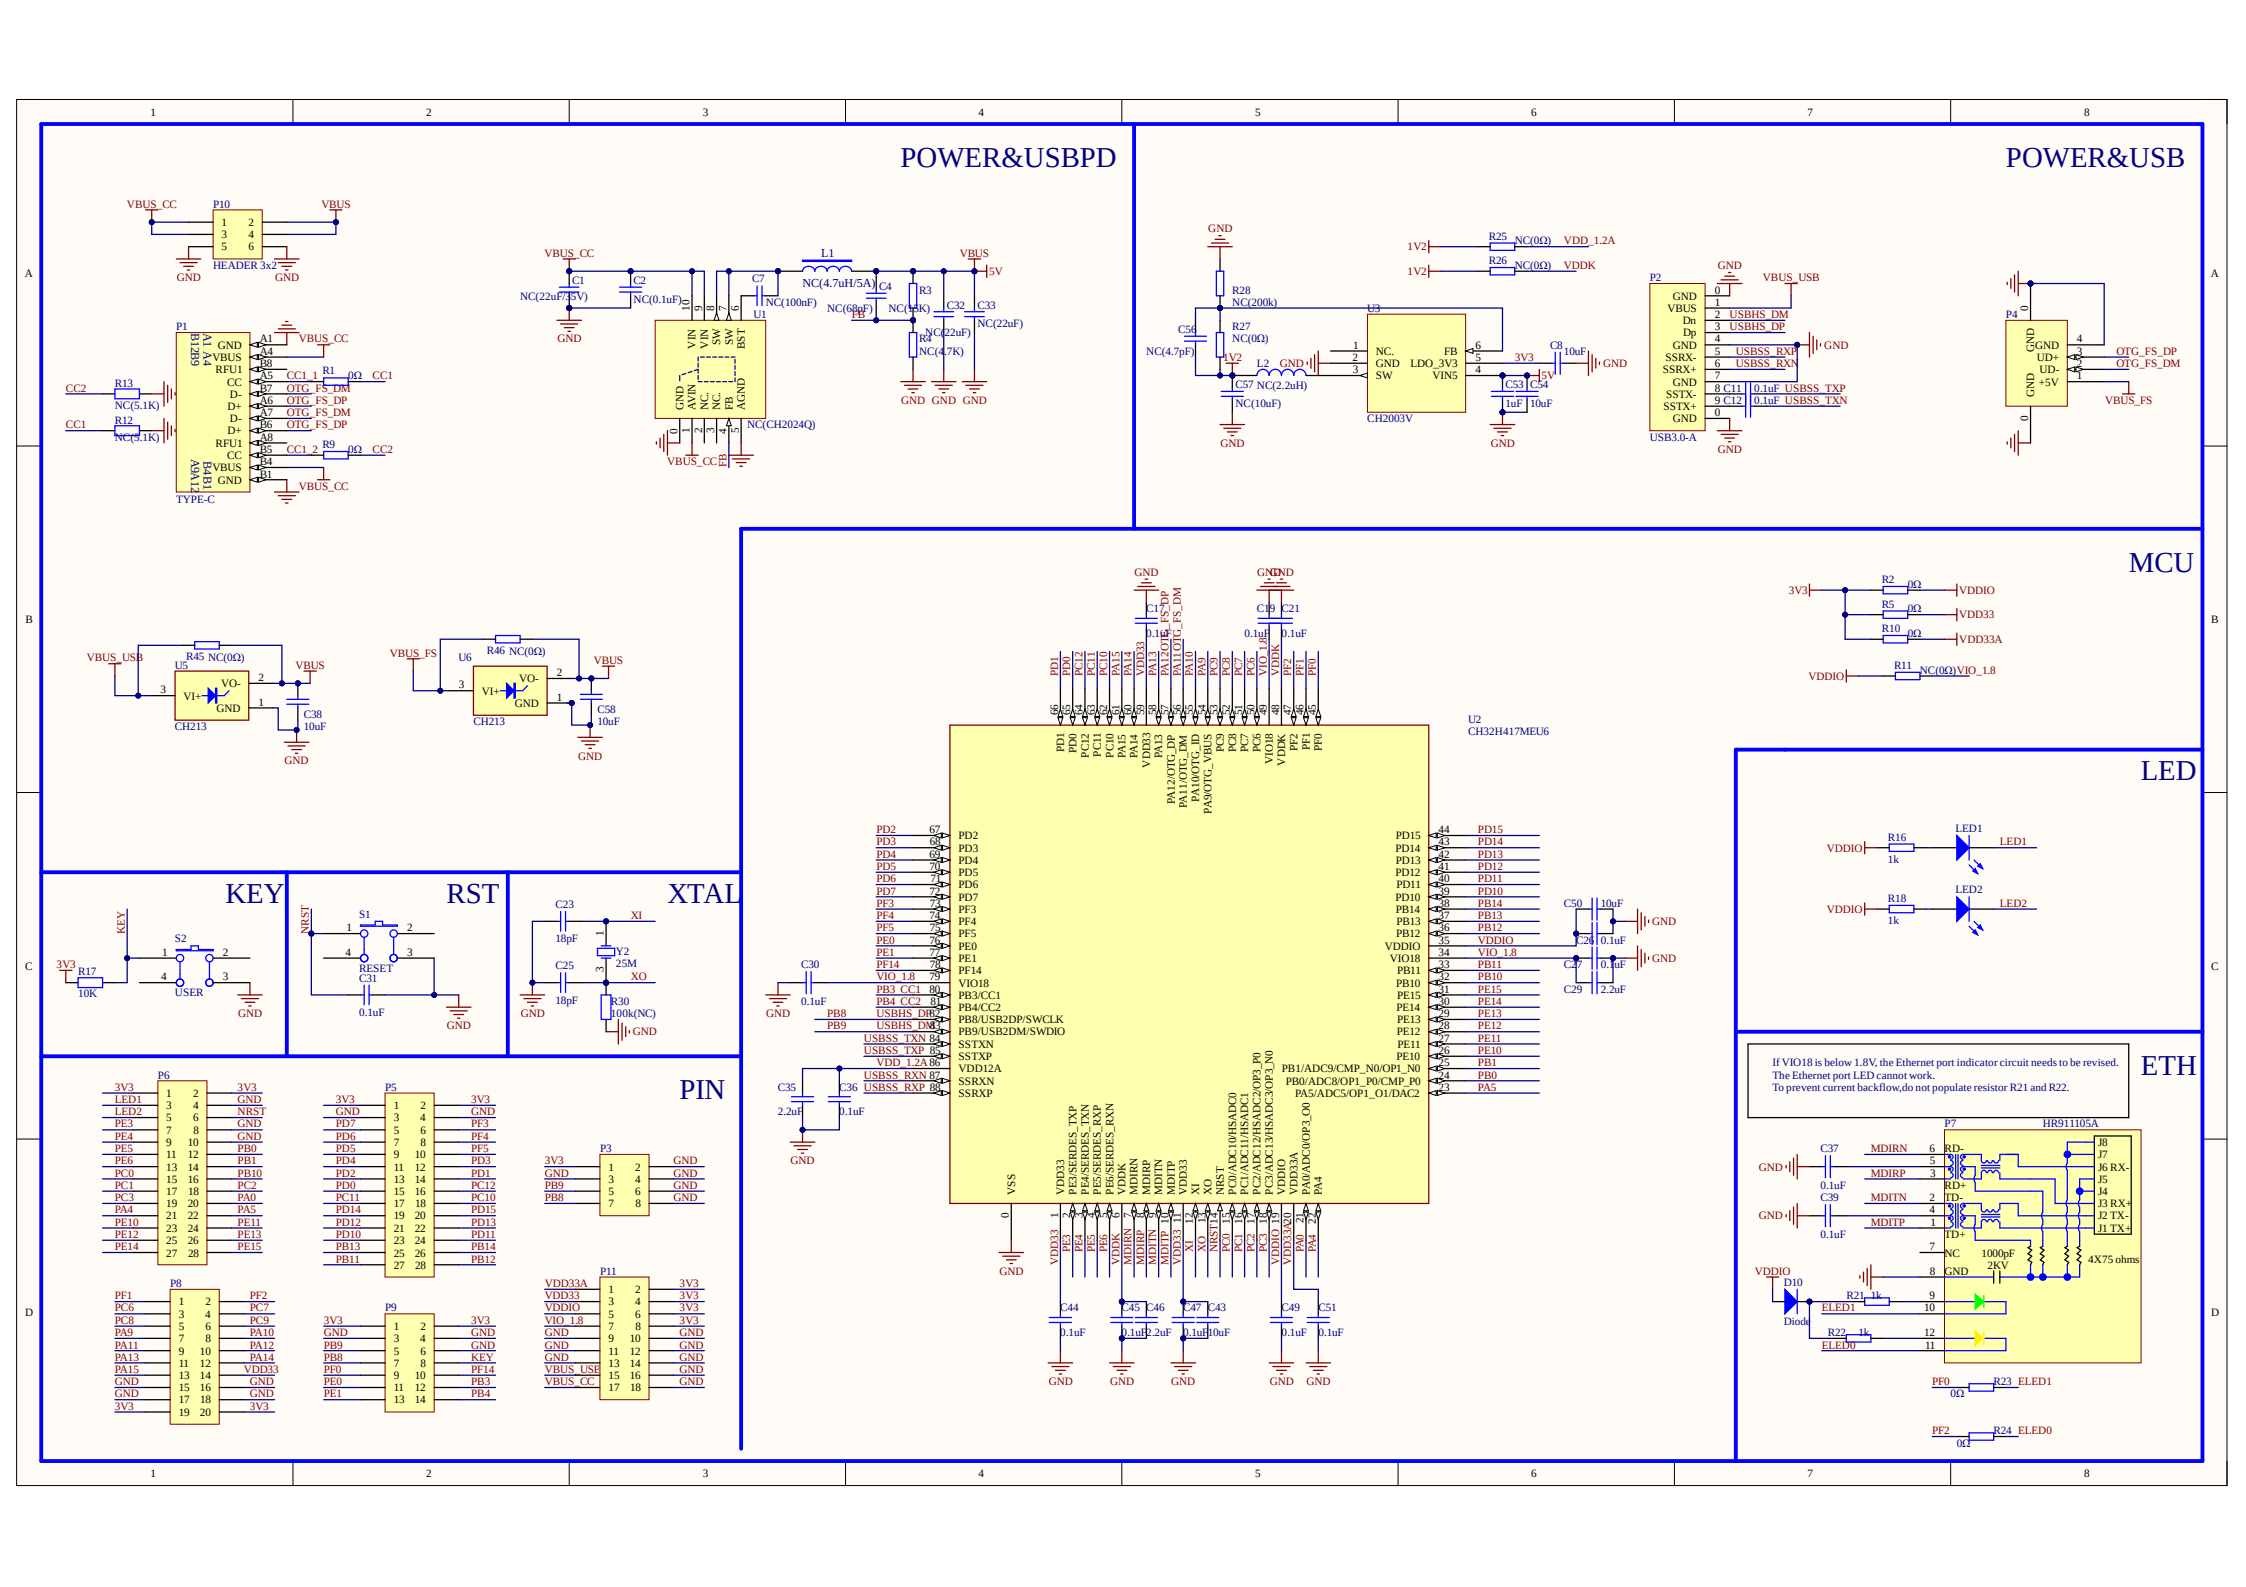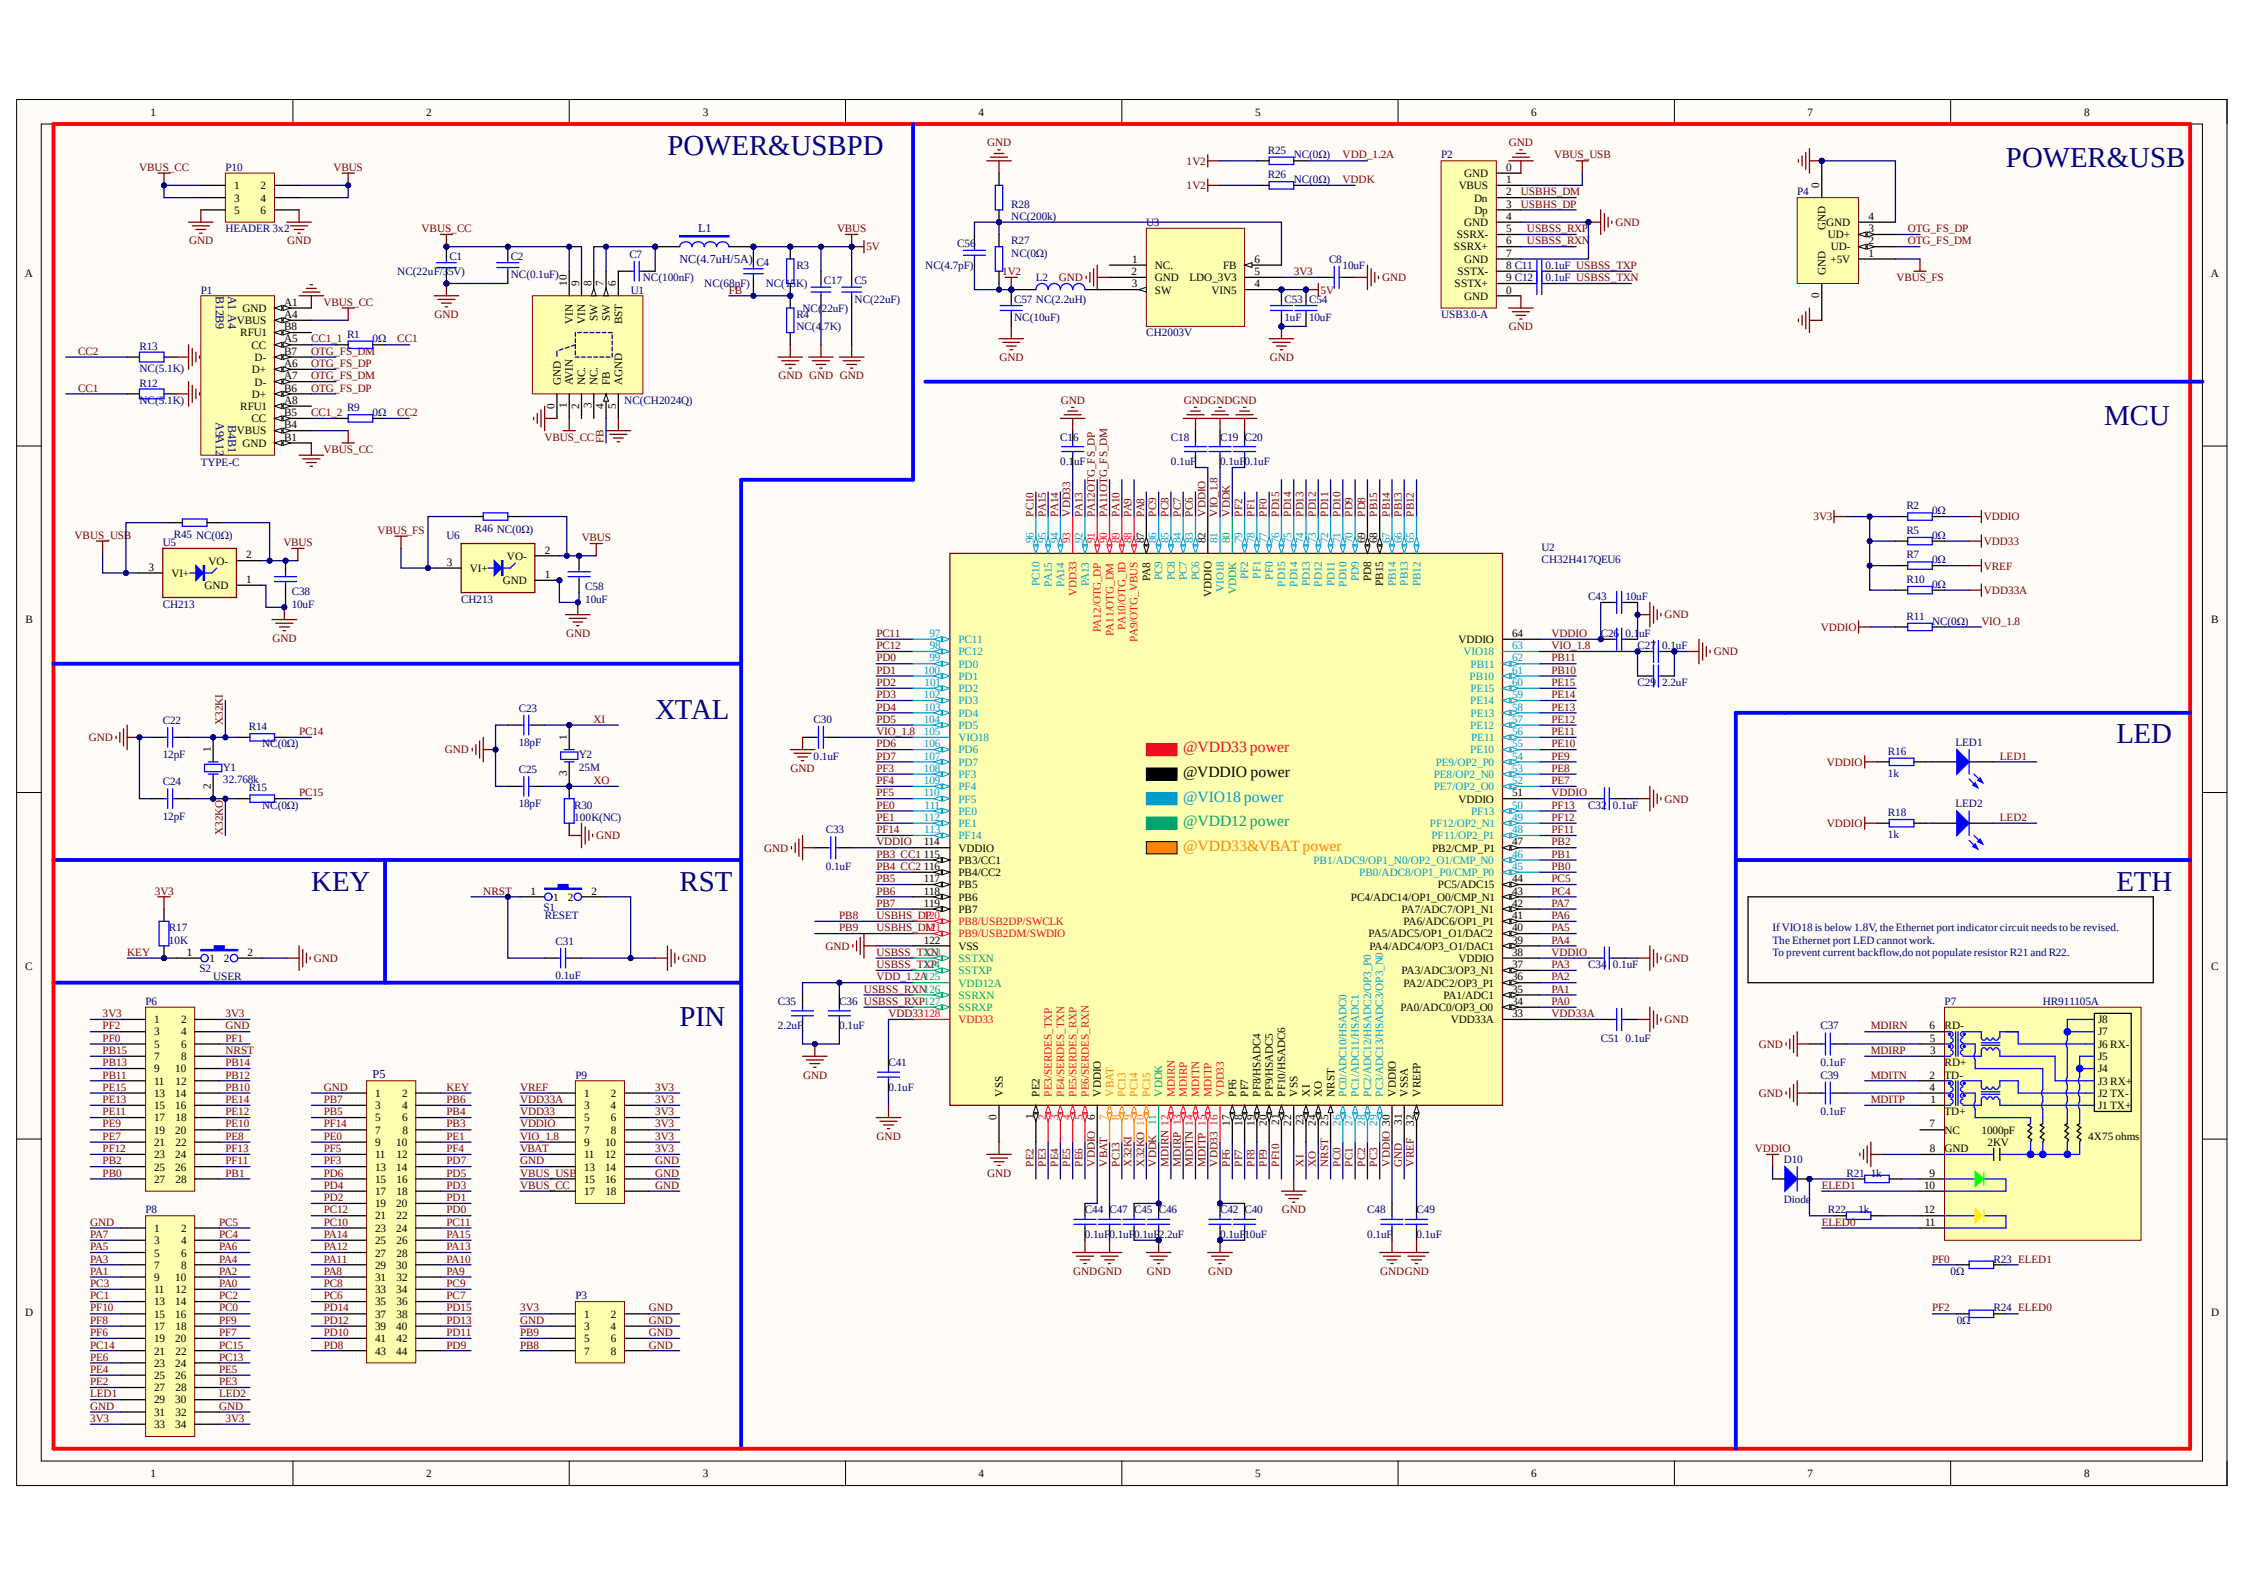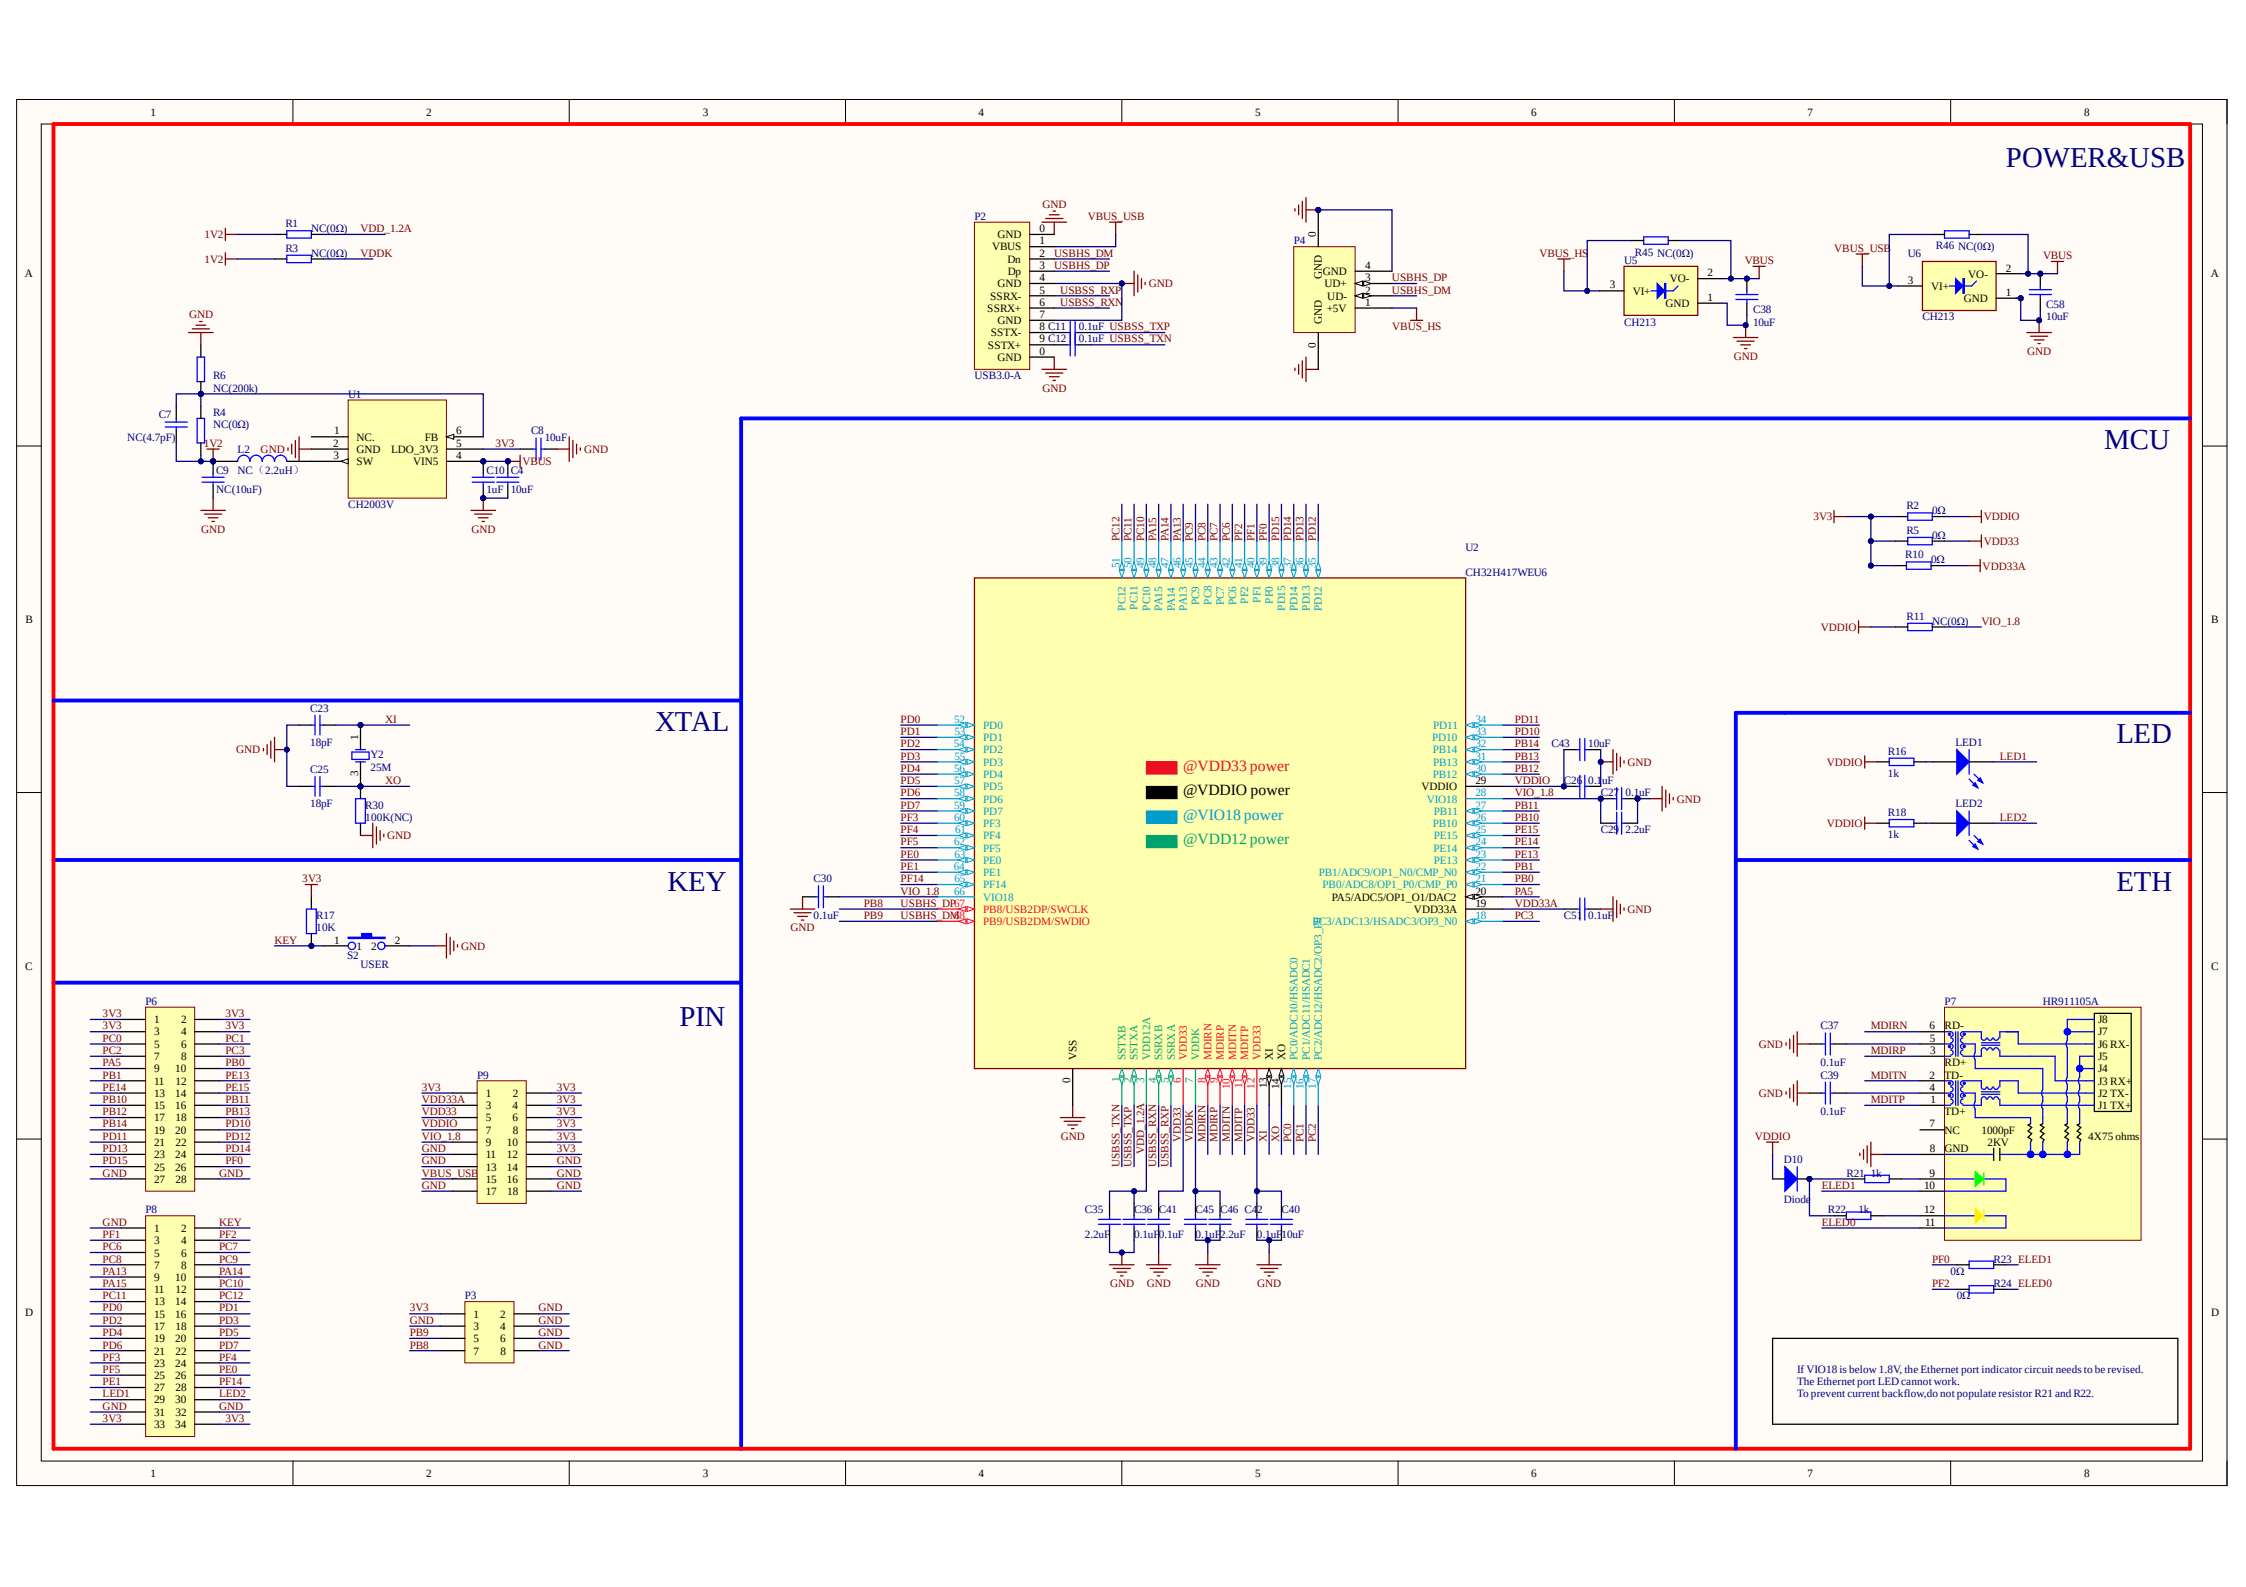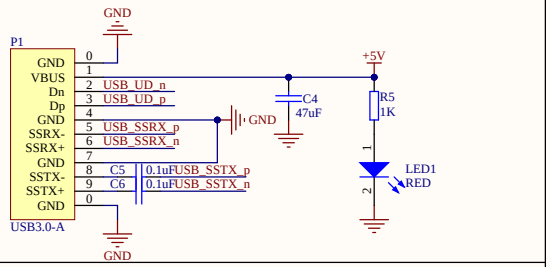

POWER

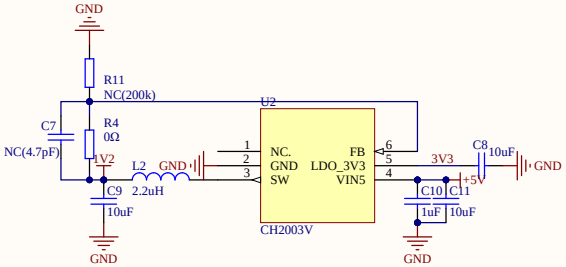



SPI FLASH




NC


DEBUG






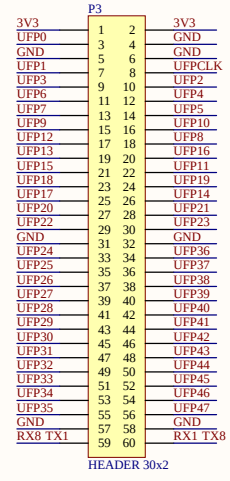


MCU

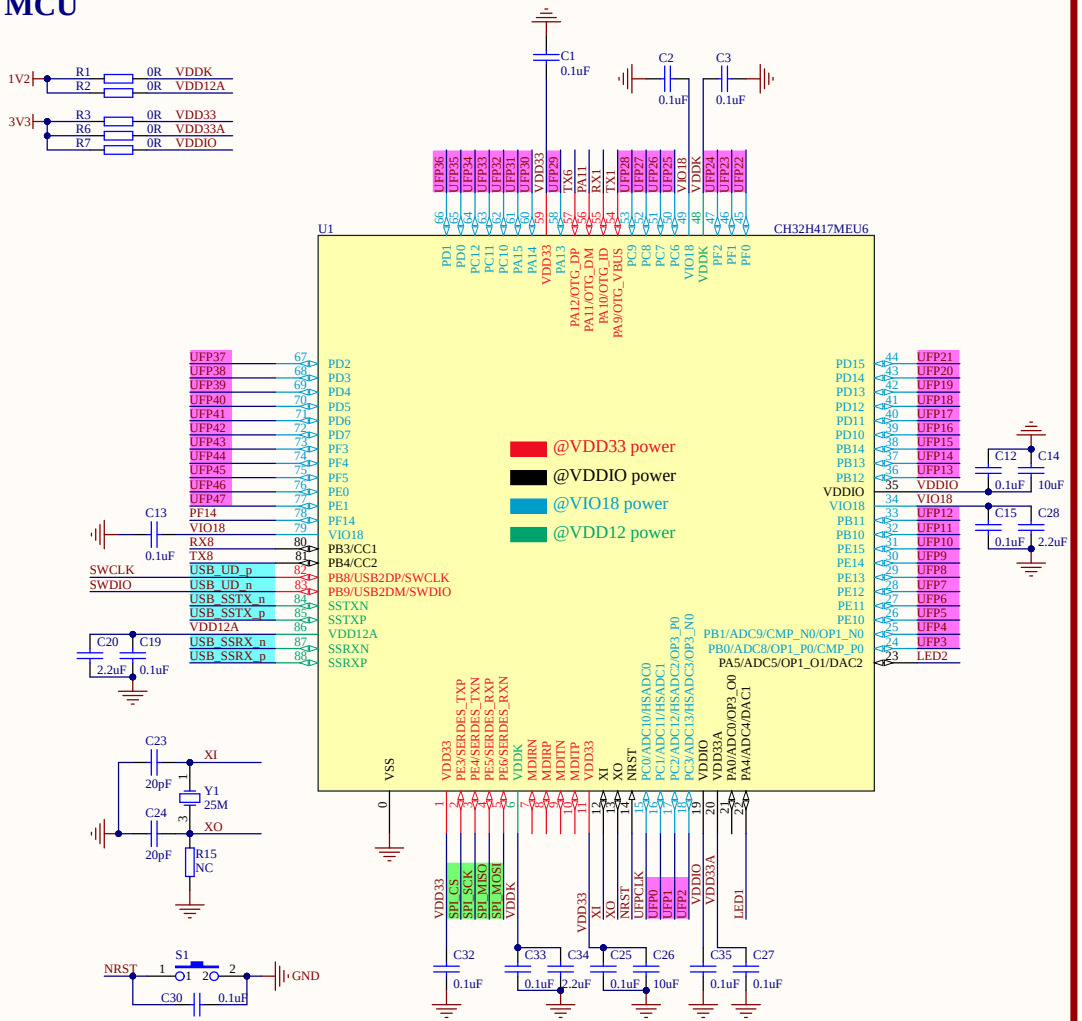


USBSS

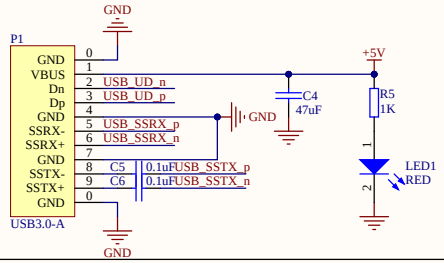

POWER

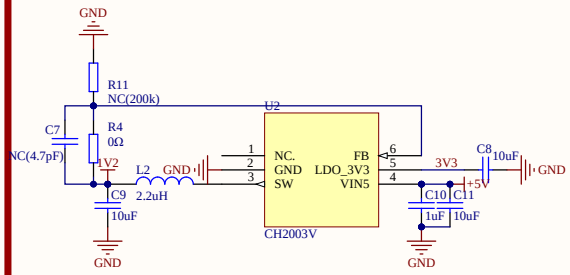



SPI FLASH




NC


DEBUG







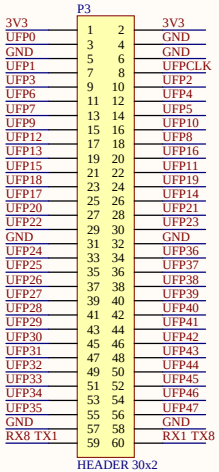

MCU

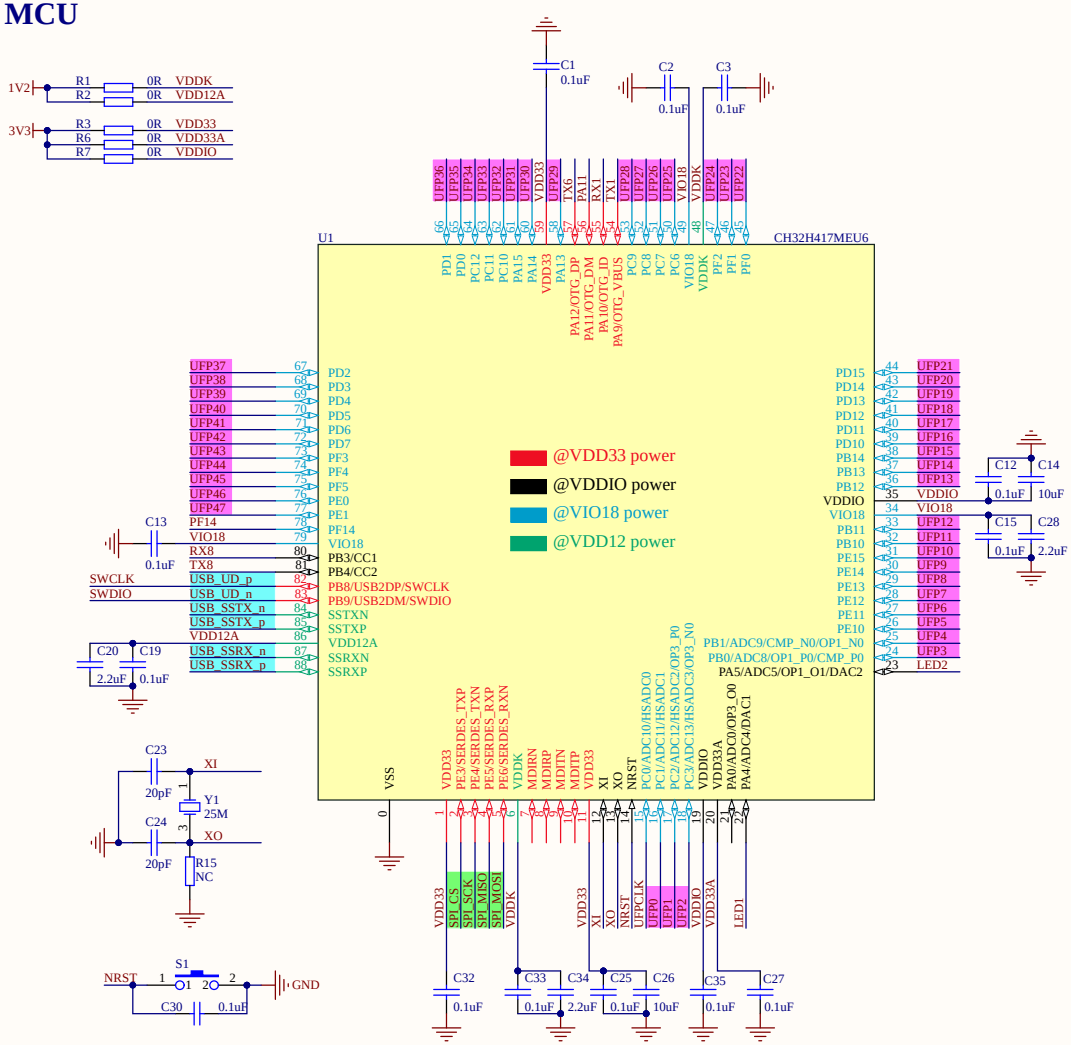

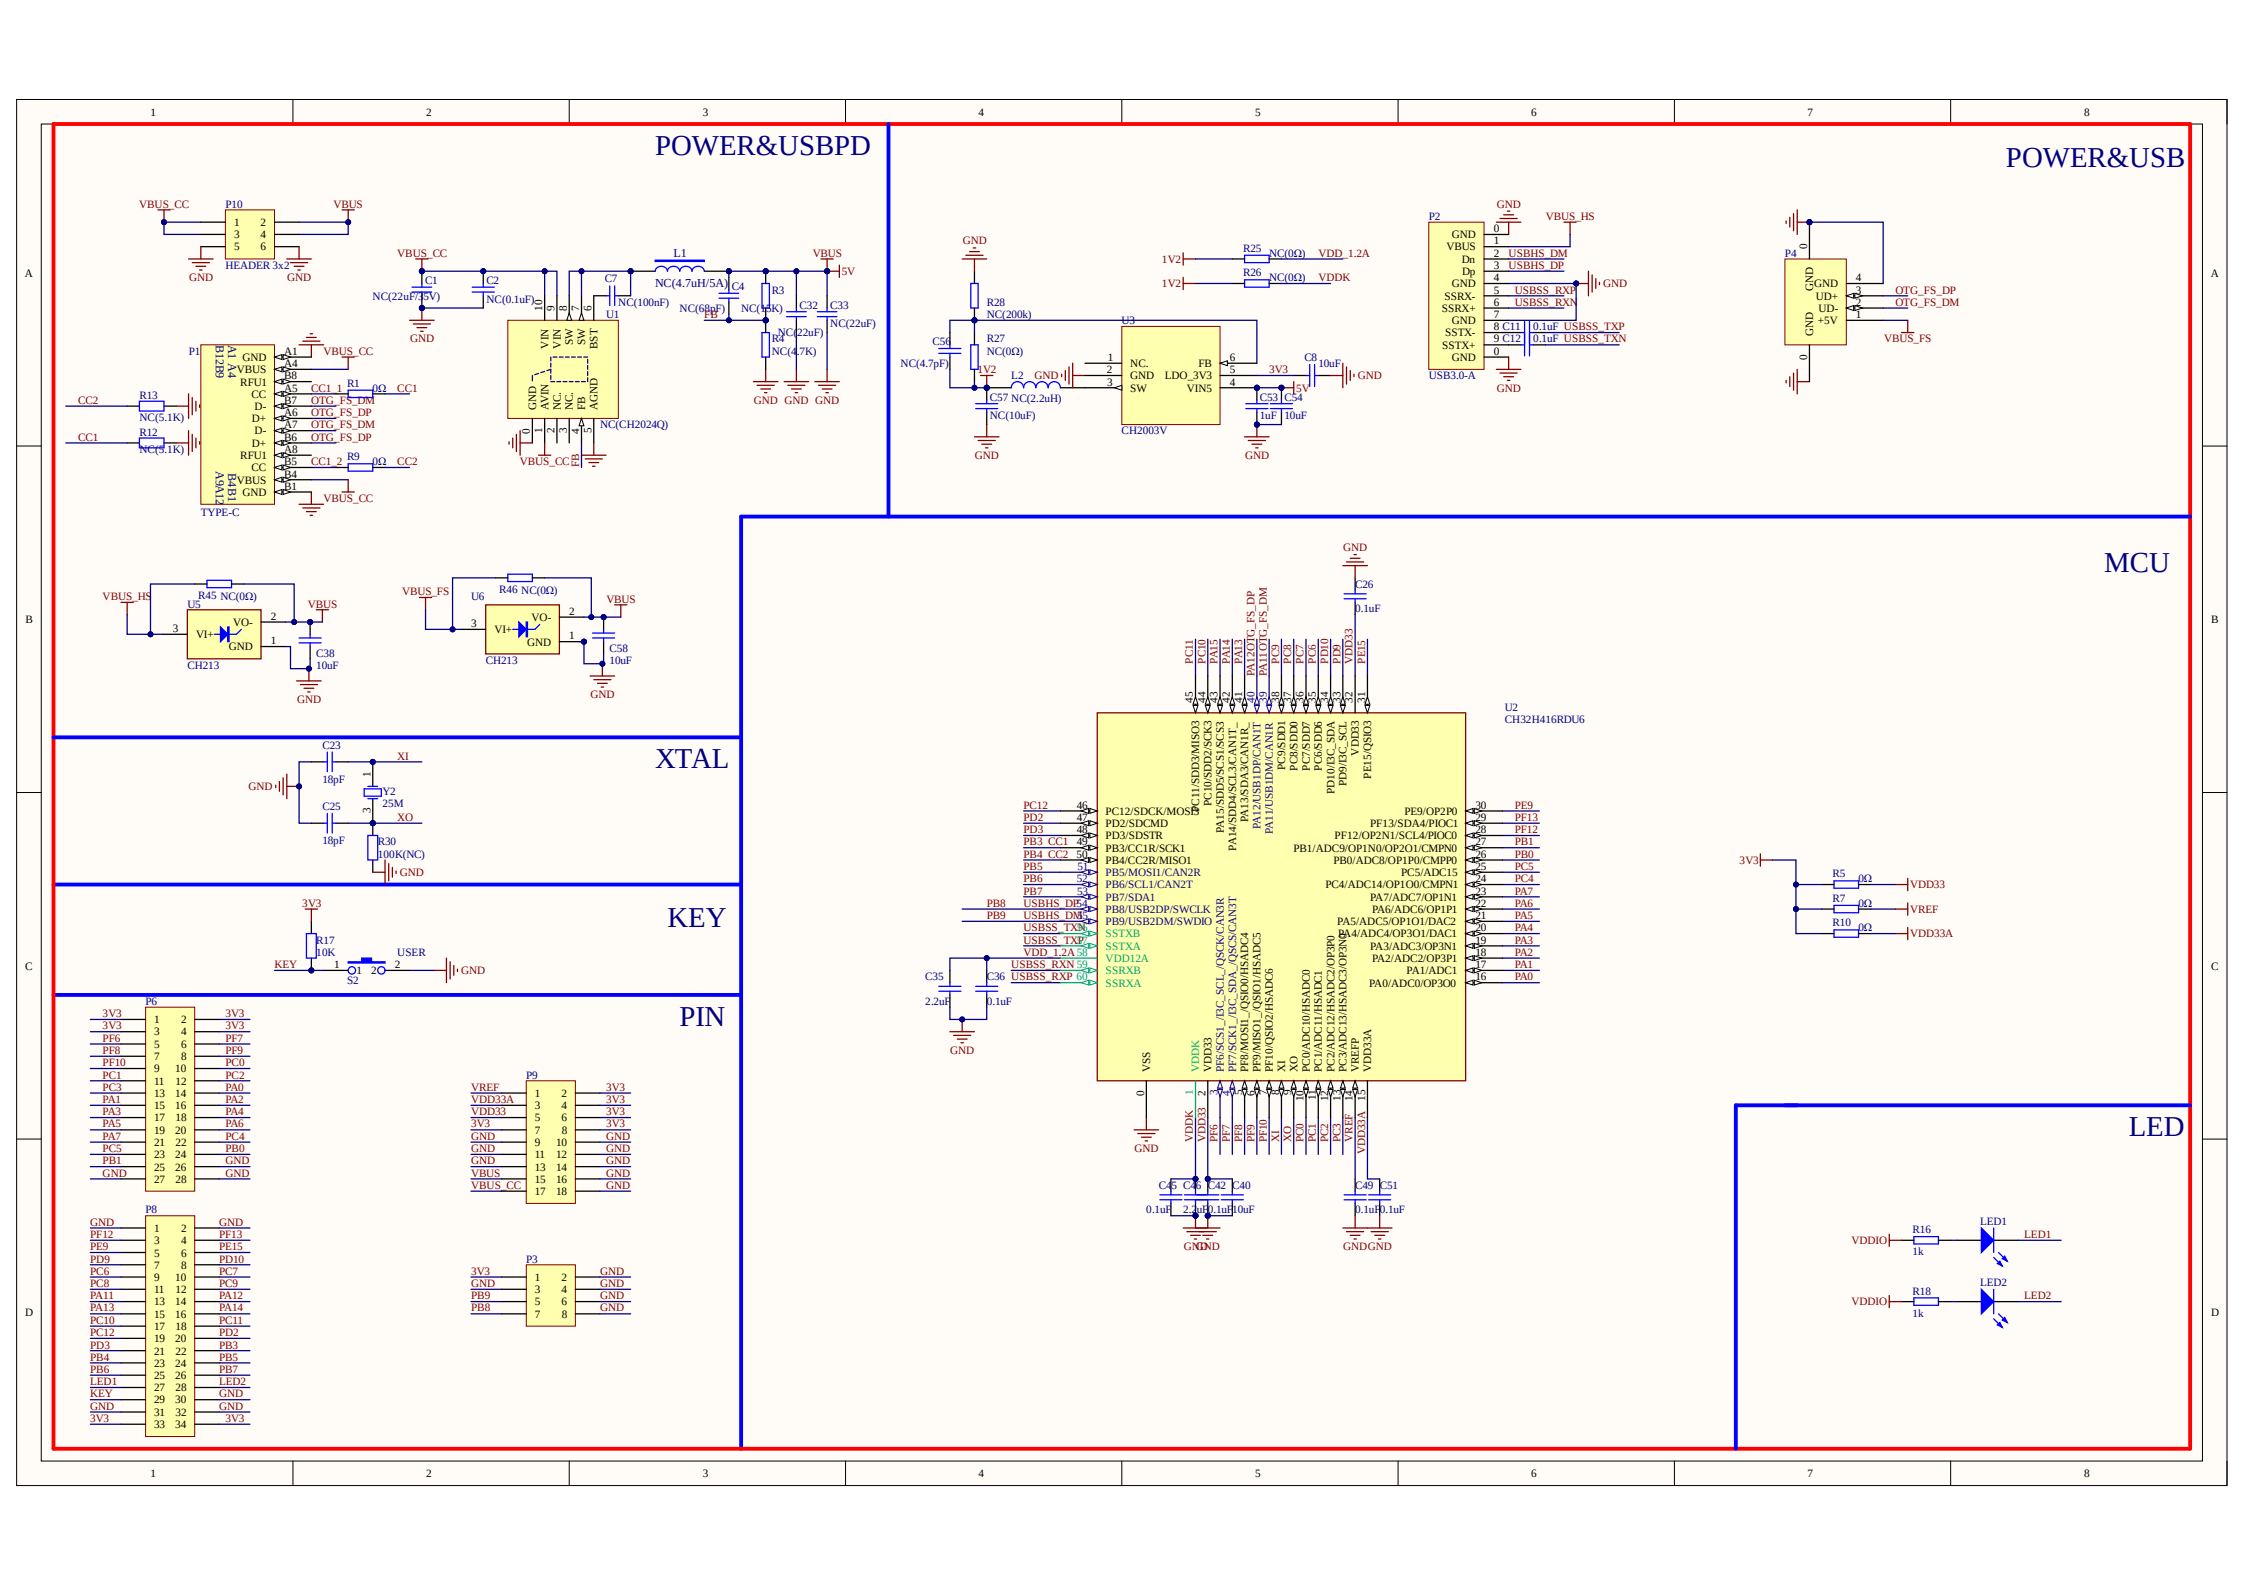
POWER&USBPD
POWER&USB
MCU
XTAL
KEY
PIN
LED
P10
HEADER 3x2
P1
TYPE-C
U1
NC(CH2024Q)
L1
NC(4.7uH/5A)
U3
CH2003V
P2
USB3.0-A
P4
U5
CH213
U6
CH213
U2
CH32H416RDU6
P6
P8
P9
P3
Y2
25M
S2
LED1
LED2

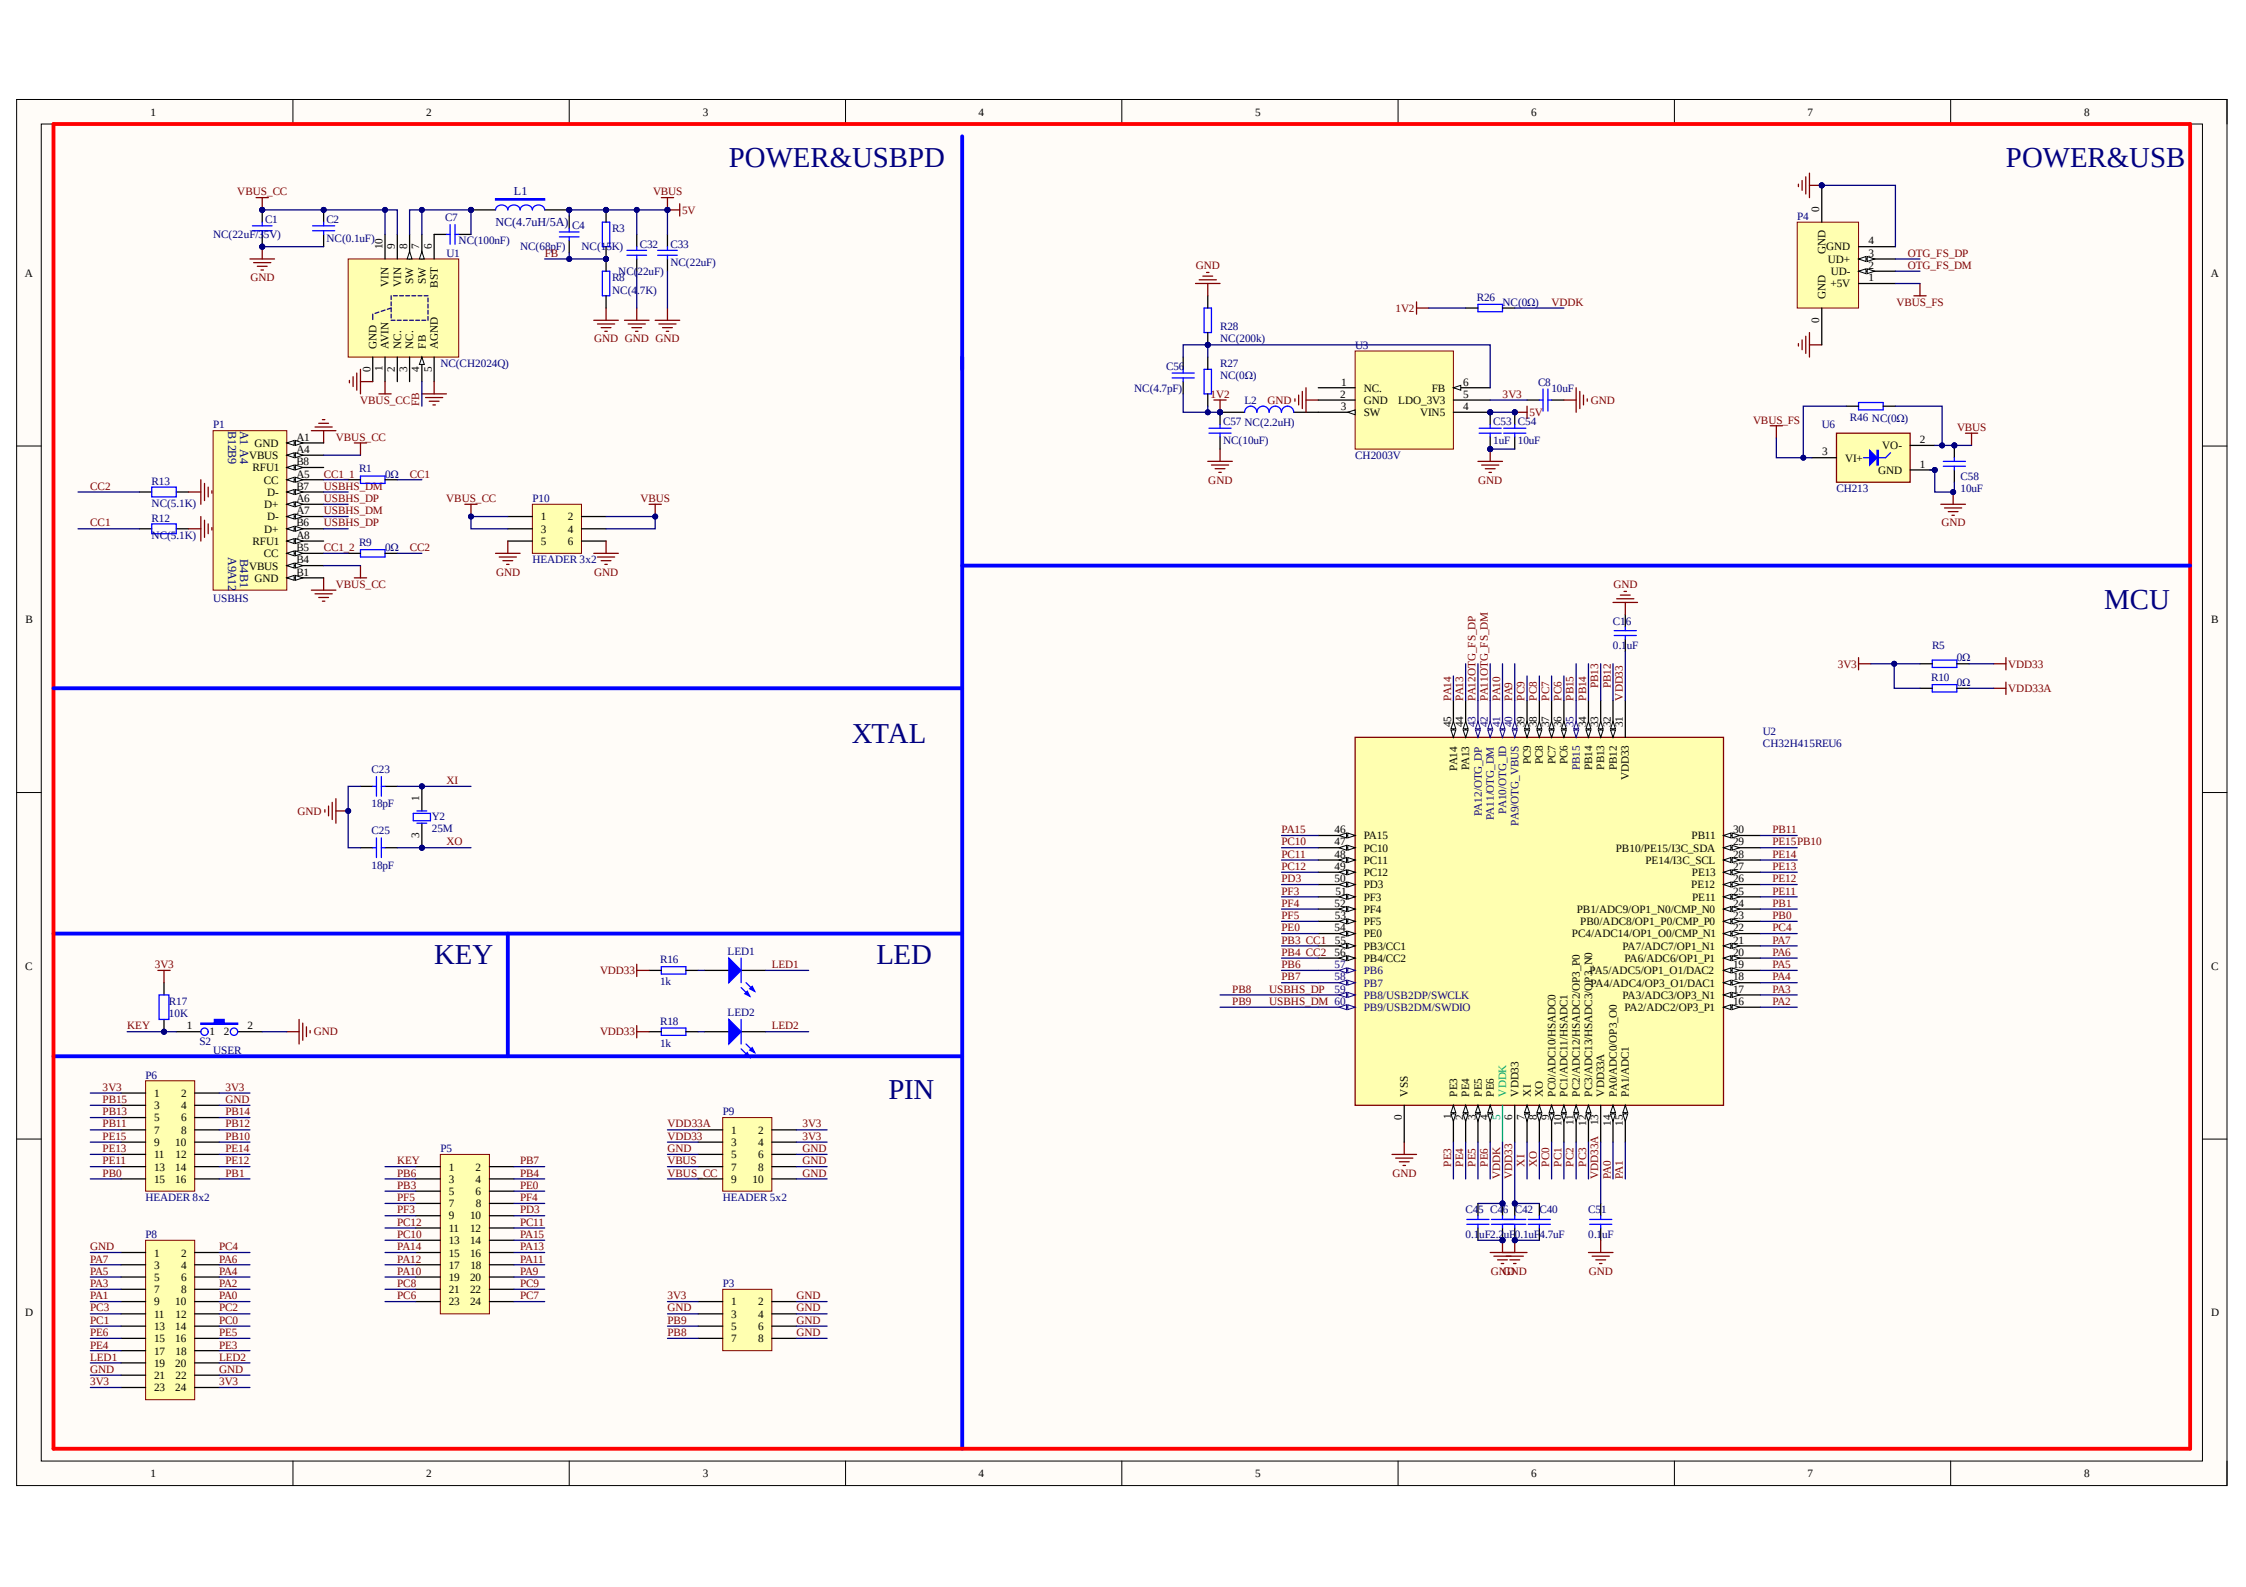
POWER&USBPD
POWER&USB
XTAL
KEY
LED
PIN
MCU
VBUS_CC
VBUS
5V
GND
L1
NC(4.7uH/5A)
C1
NC(22uF/25V)
C2
NC(0.1uF)
C7
NC(100nF)
C4
NC(68pF)
R3
NC(51K)
C32
NC(22uF)
C33
NC(22uF)
R8
NC(4.7K)
U1
VIN
SW
BST
AGND
NC(CH2024Q)
P1
USBHS
CC2
CC1
R13
NC(5.1K)
R12
NC(5.1K)
R1
0Ω
CC1
R9
0Ω
CC2
USBHS_DP
USBHS_DM
P10
HEADER 3x2
R28
NC(200k)
R27
NC(0Ω)
C56
NC(4.7pF)
1V2
L2
NC(2.2uH)
C57
NC(10uF)
U3
NC.
GND
SW
FB
LDO_3V3
VIN5
CH2003V
3V3
C8
10uF
C53
1uF
C54
10uF
R26
NC(0Ω)
VDDK
P4
OTG_FS_DP
OTG_FS_DM
VBUS_FS
U6
R46
NC(0Ω)
VO-
VI+
CH213
C58
10uF
C23
18pF
C25
18pF
Y2
25M
XI
XO
KEY
R17
10K
S2
USER
LED1
LED2
R16
1k
R18
1k
P6
HEADER 8x2
P5
P9
HEADER 5x2
P8
P3
U2
CH32H415REU6
C16
0.1uF
R5
0Ω
R10
0Ω
VDD33
VDD33A
C45
0.1uF
C43
2.2uF
C42
0.1uF
C40
4.7uF
C51
0.1uF