
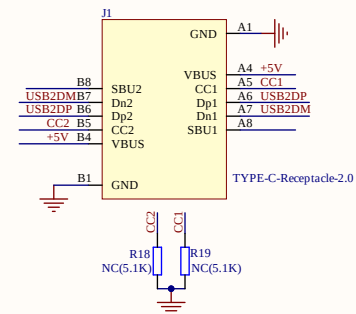
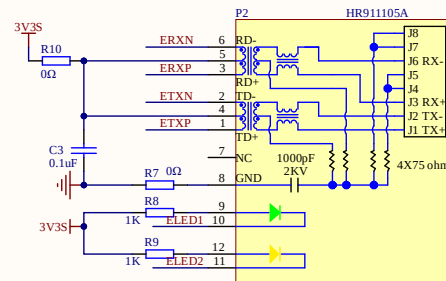
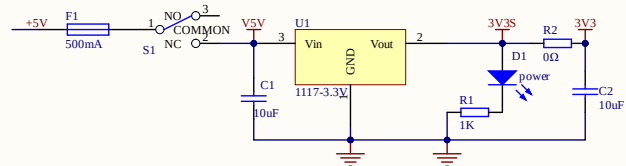








POWER

ETH

USB type C


USB host type A

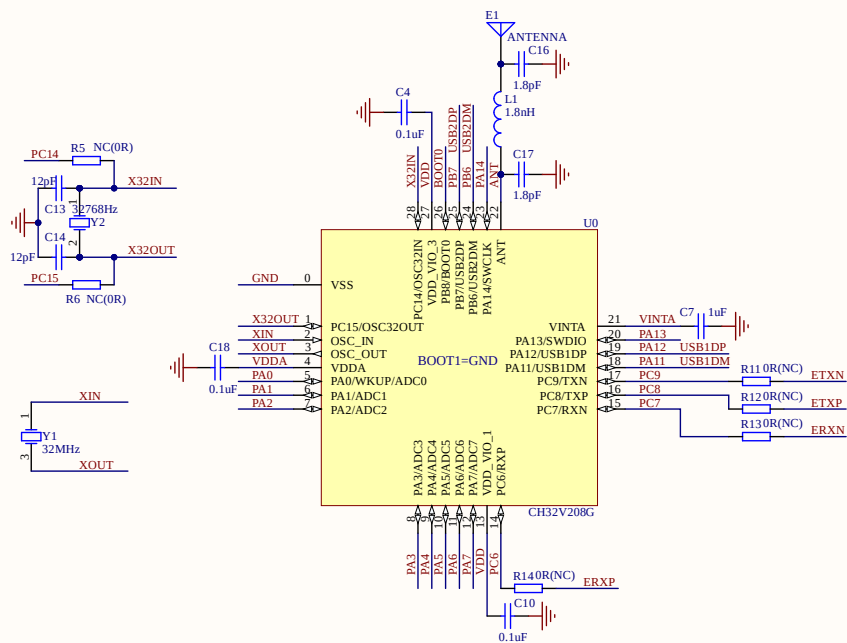

CH32V208G

HEADER

KEY

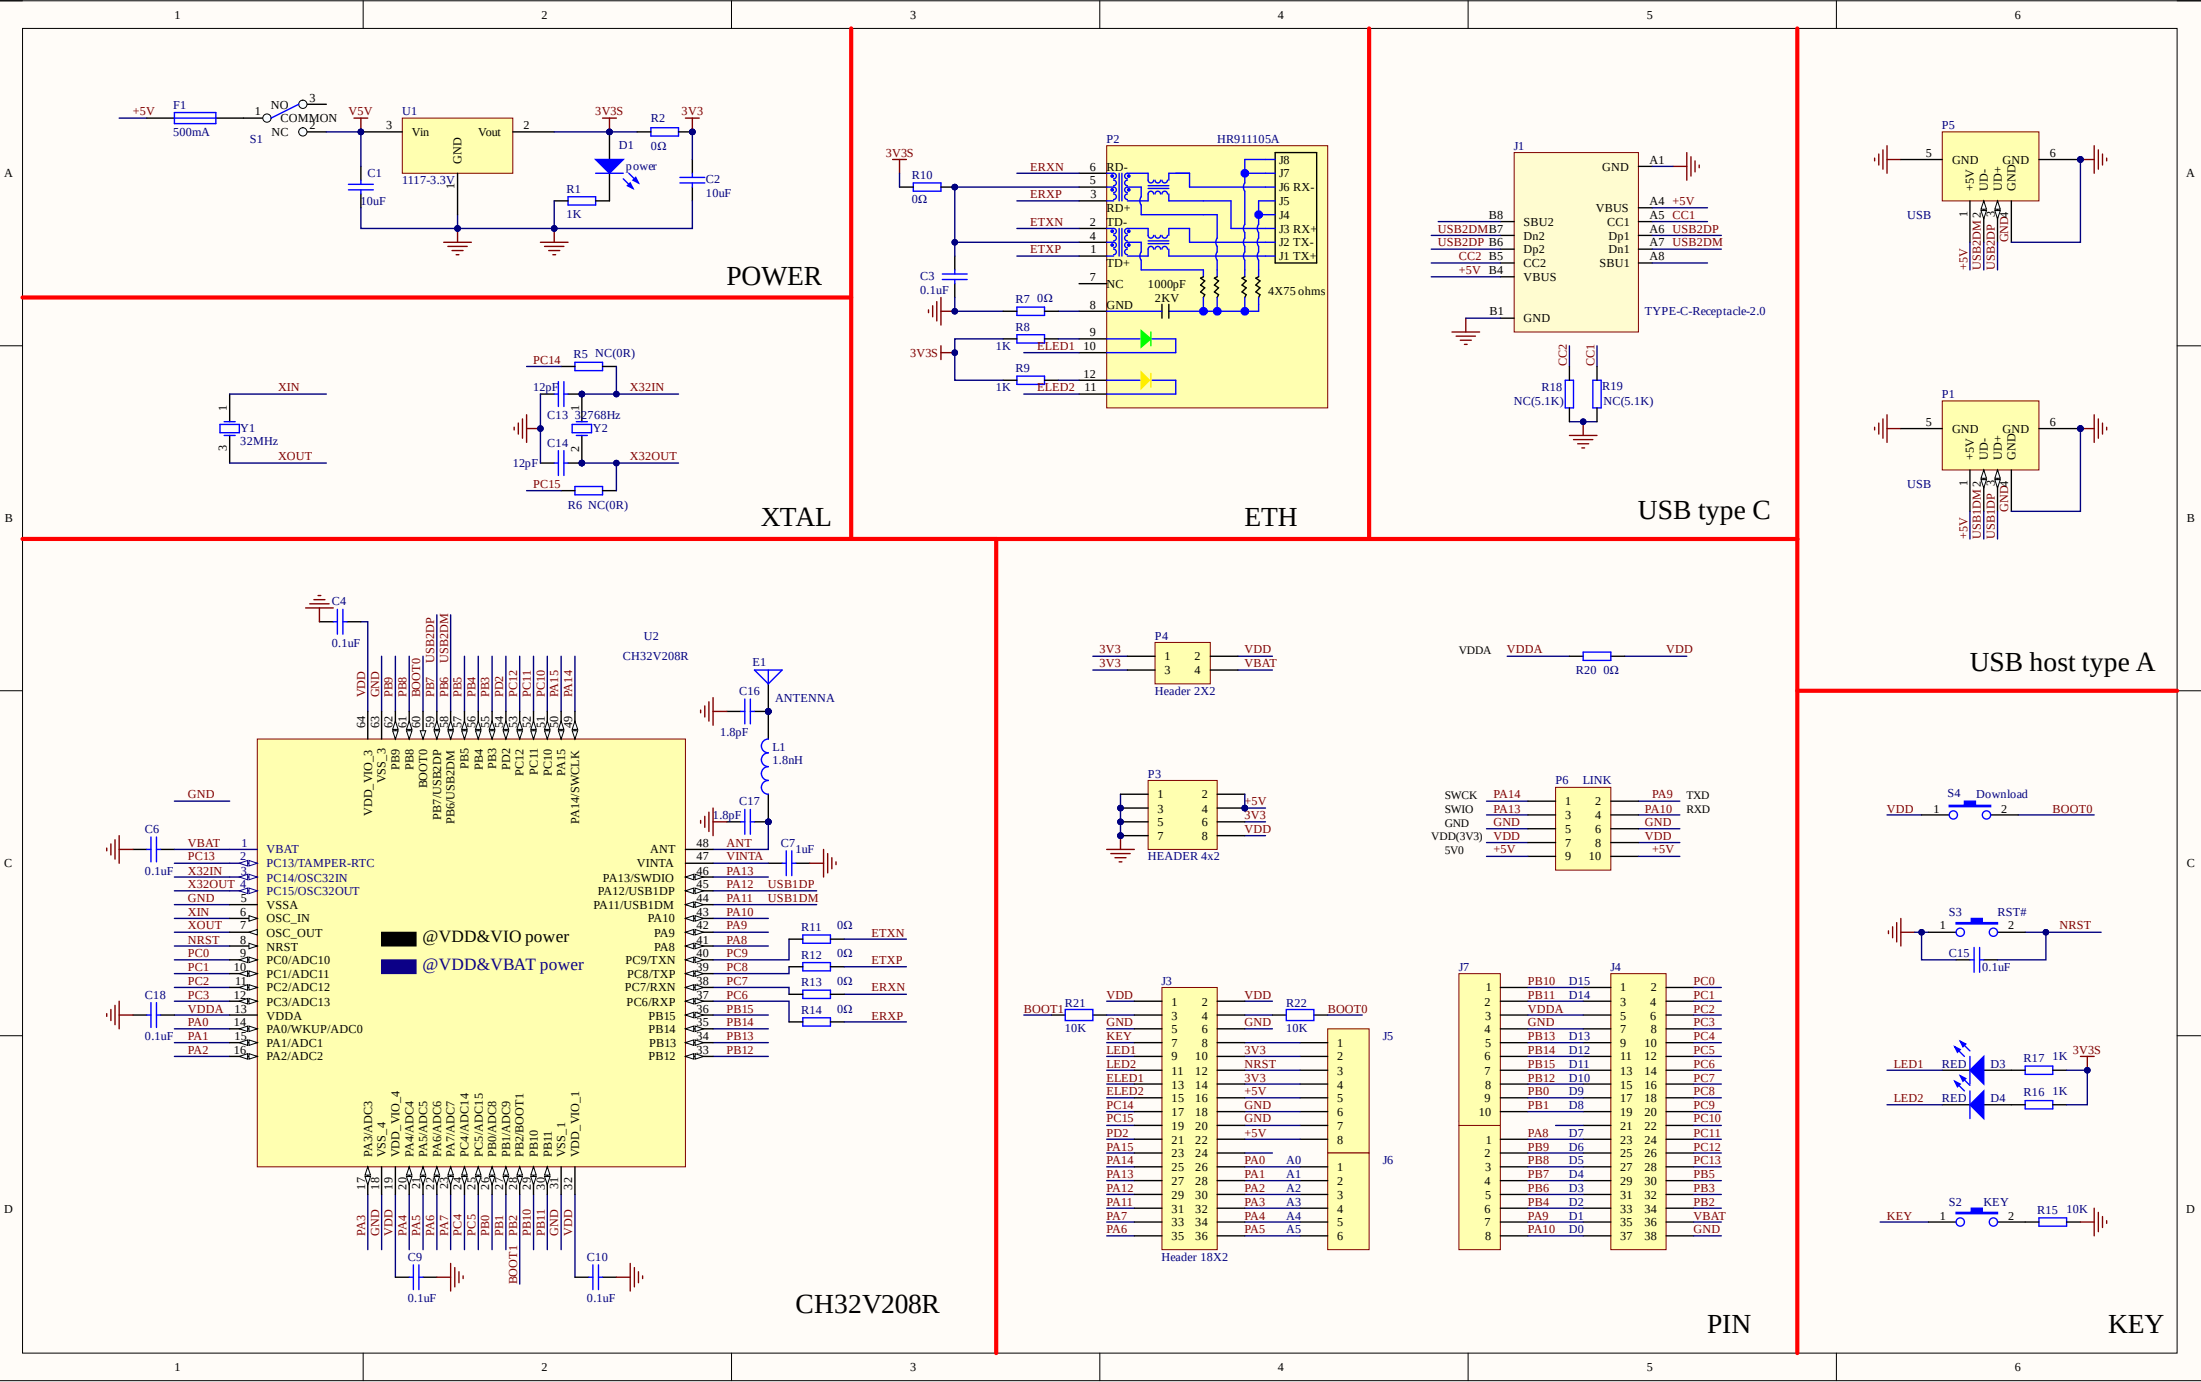

POWER

XTAL

ETH


USB type C

USB host type A

CH32V208R

PIN

KEY

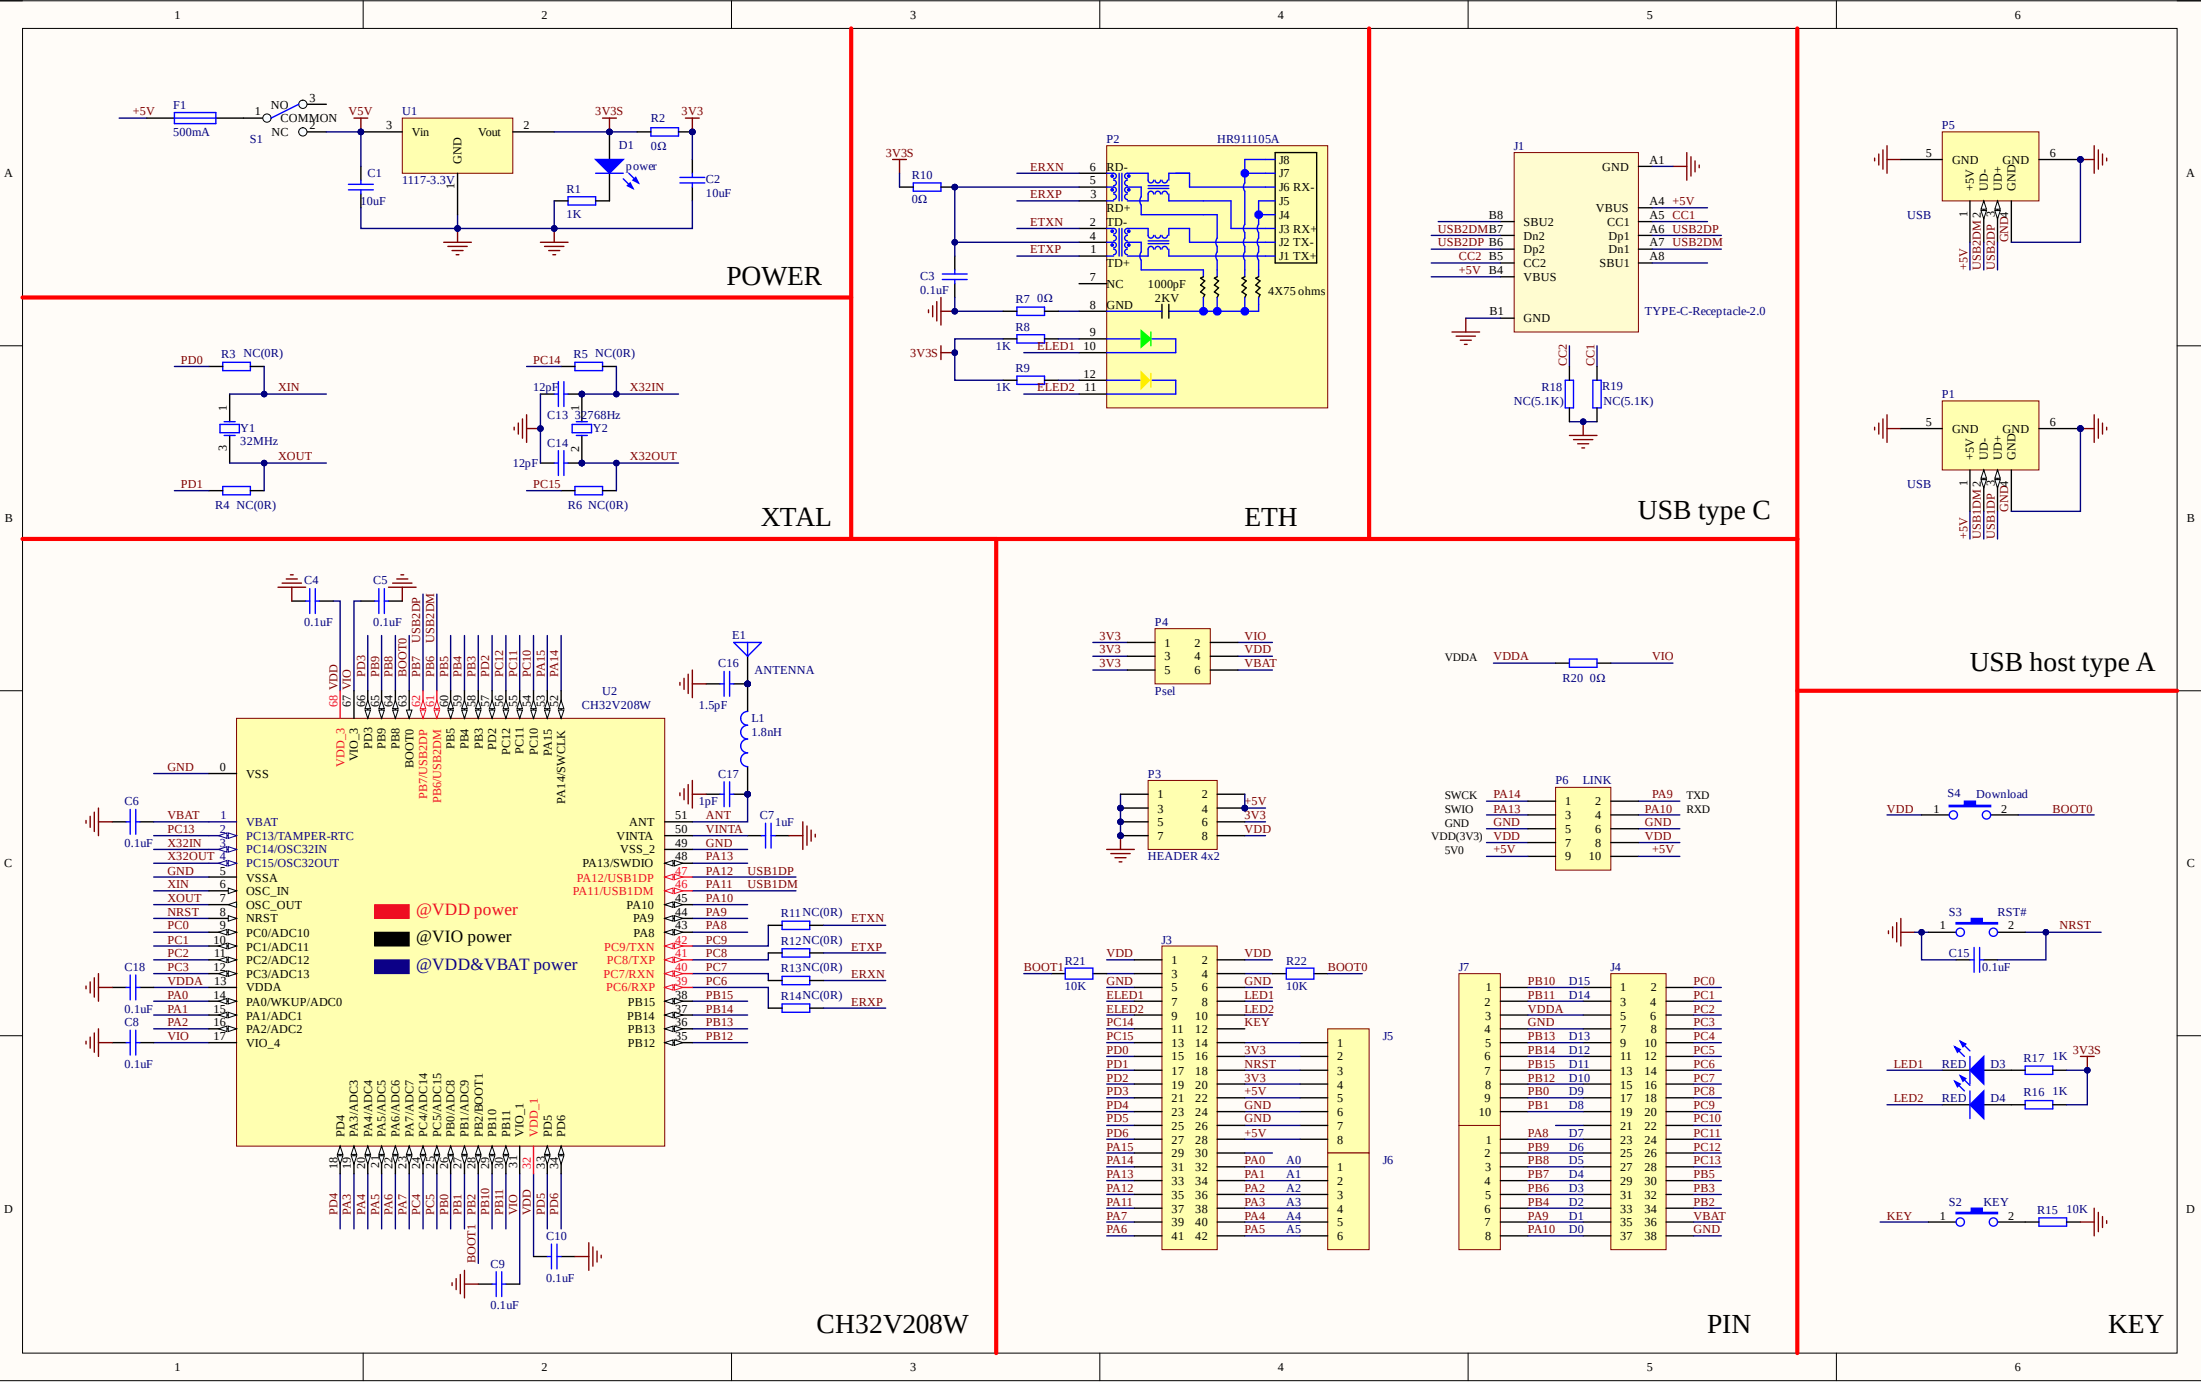

POWER

XTAL

ETH

USB type C


USB host type A

CH32V208W


PIN

KEY



POWER

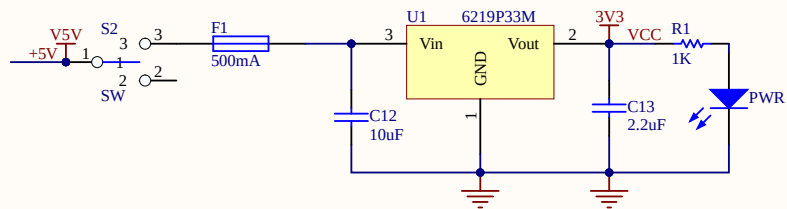

LED




USB


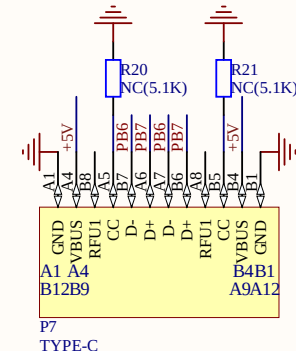


MCU


CH32V203G8_MINI

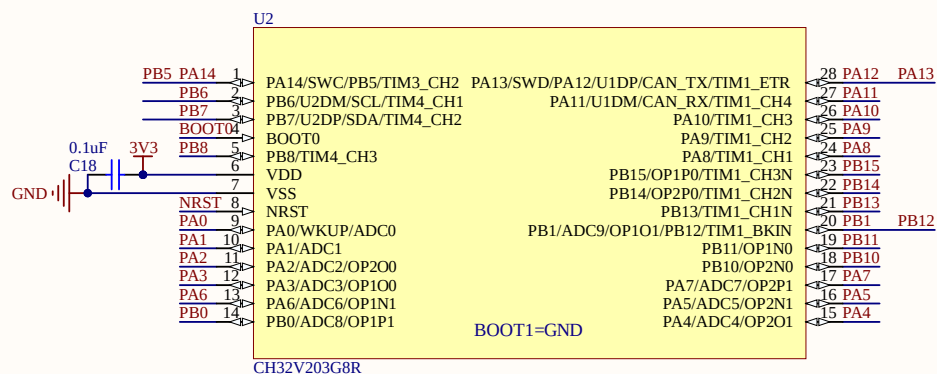

PIN



RST



The diagram shows a DC-DC converter circuit. A +5V input line passes through a switch (S2) and a fuse (F1, 500mA) to the Vin pin of a 6219P33M module. A 10uF capacitor (C12) is connected between the input line and ground. The module's GND pin is connected to ground. The Vout pin is connected to a 3V3 output line, which has a 2.2uF capacitor (C13) to ground. The 3V3 output line passes through a 1K resistor (R1) to a red LED (D1) labeled 'POWER red', which is also connected to ground.

CH32Vx03C_MINI


3V3

C16 0.1uF


48 47 46 PB9 45 PB8 44 BOOT0 43 PB7 42 PB6 41 PB5 40 PB4 39 PB3 38 PA15 37 PA14

VDD_VIO_3
VSS_3
PB9
PB8
BOOT0
PB7/USB2DP
PB6/USB2DM
PB5
PB4
PB3
PA15
PA14/SWCLK


U2
CH32V203CxT

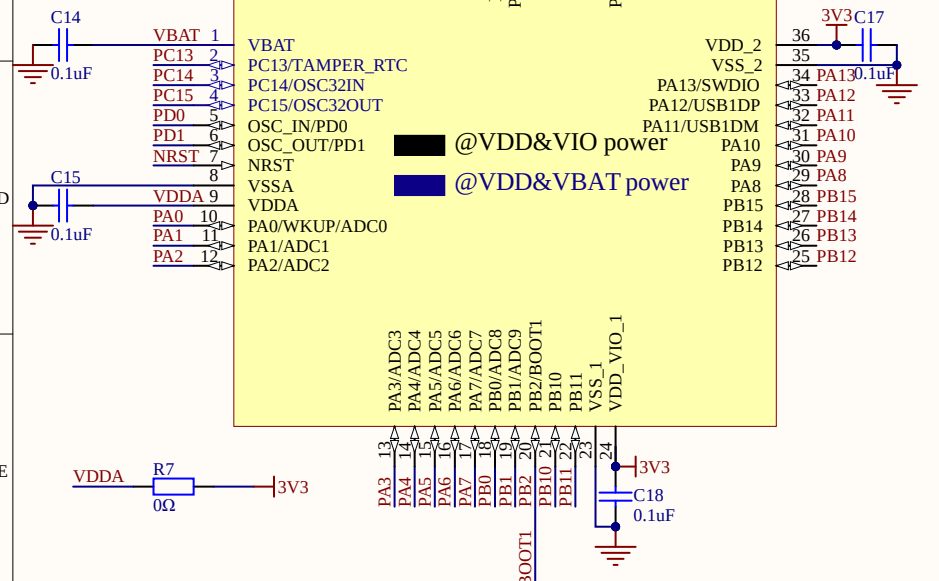


POWER

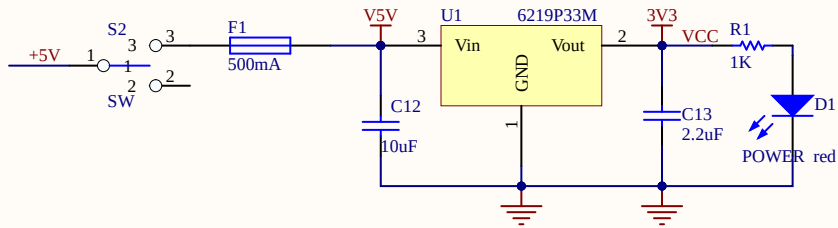

LED




USB






MCU


CH32Vx03C_MINI

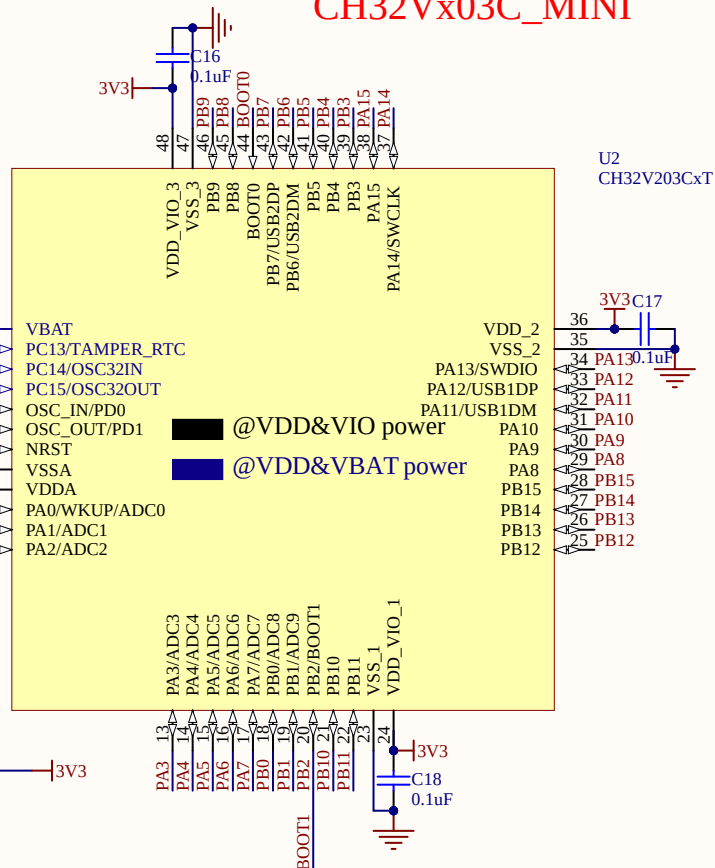



XTAL

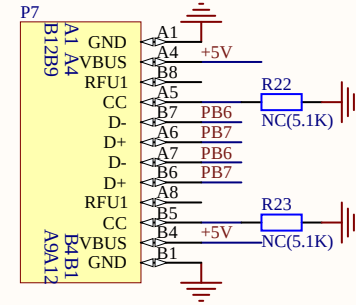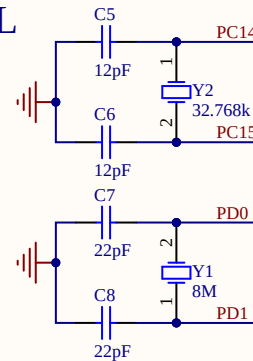


RST

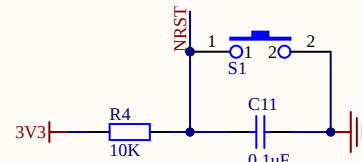


PIN

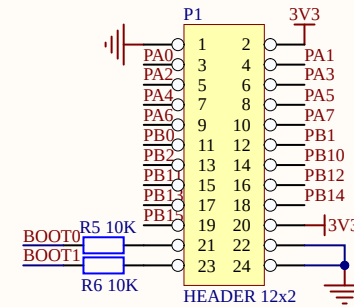


XTAL




BOOT




RST




EEPROM




CAN

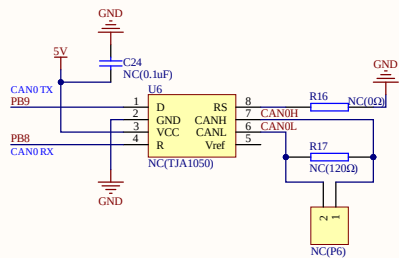


MCU

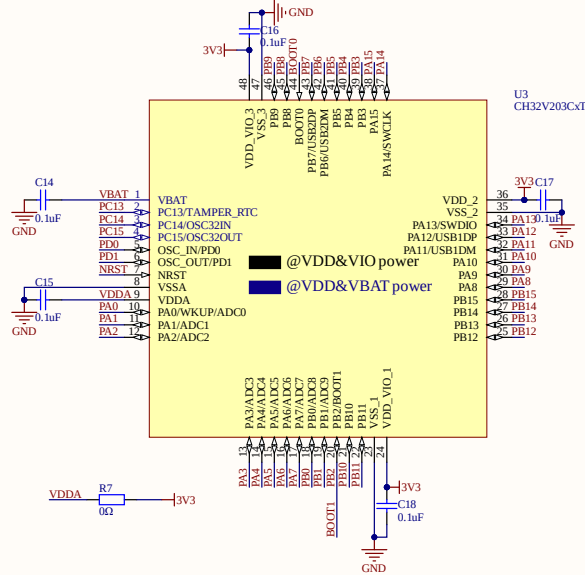


TF CARD

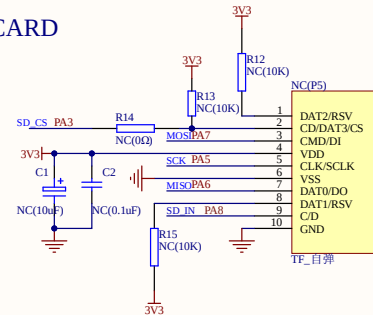


SPI FLASH

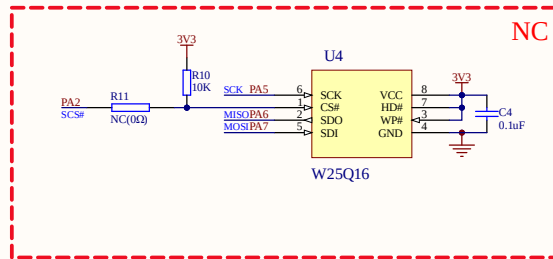


POWER

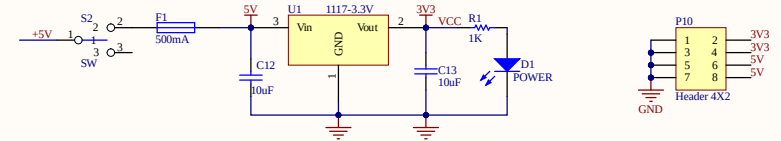


TOUCHKEY




SWD




LED




PIN




UART




USB




CH340X




USB

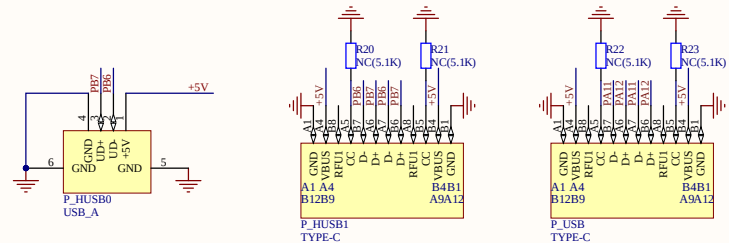


POWER

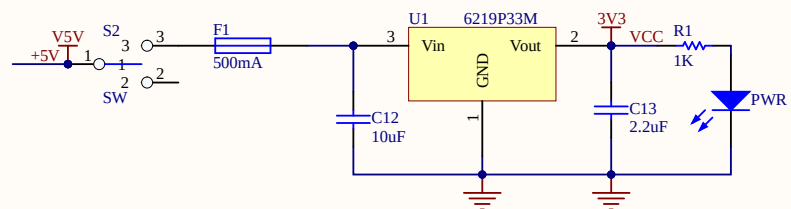

LED




USB

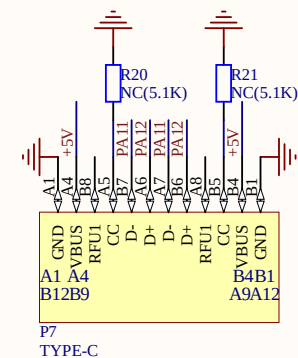


MCU



CH32V203F_MINI

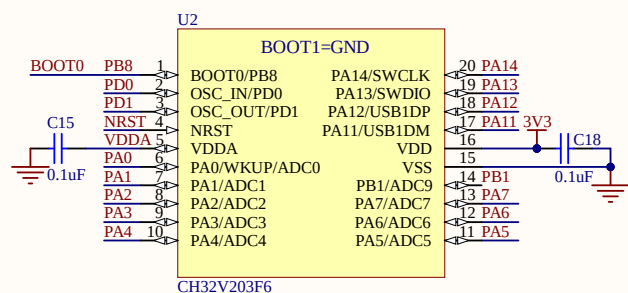

XTAL




PIN




RST




POWER

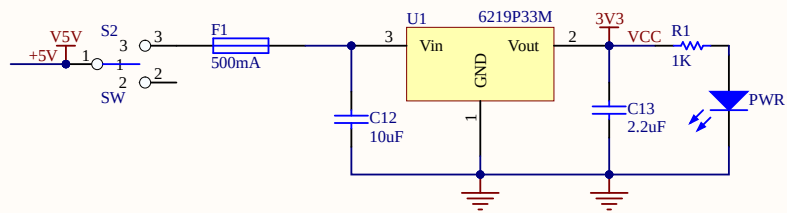

LED

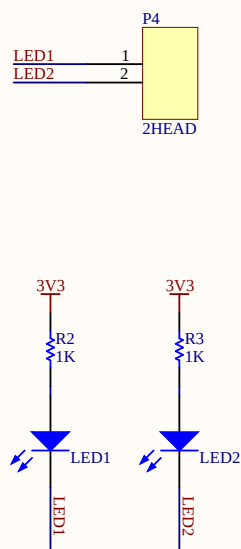


USB


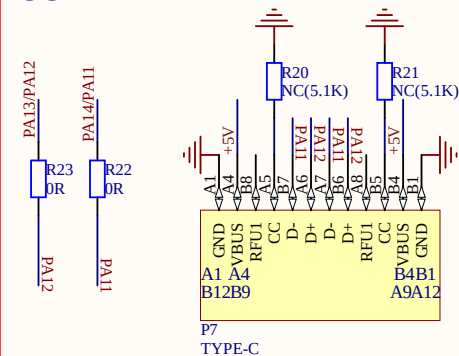


MCU


CH32V203F8U_MINI

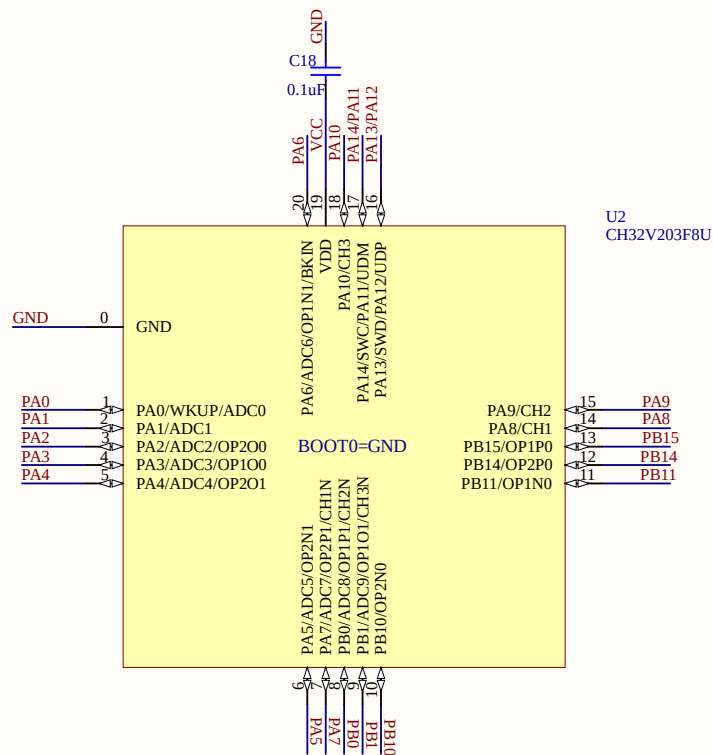


PIN




POWER

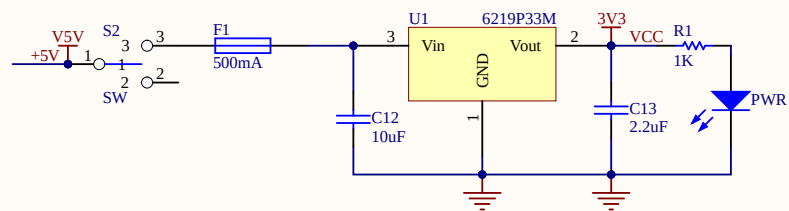

LED




USB

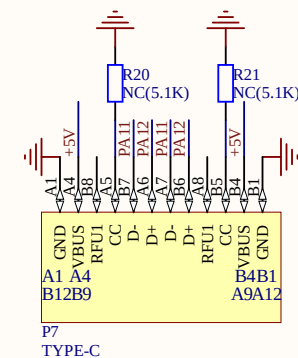


MCU



CH32V203G_MINI

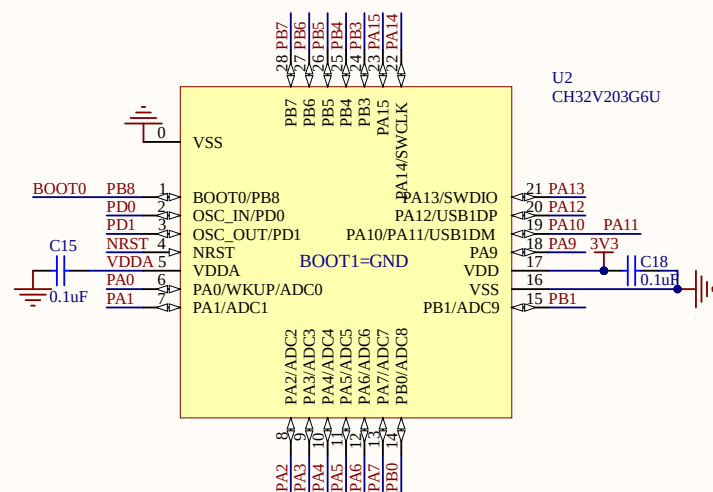



XTAL




PIN




RST




POWER

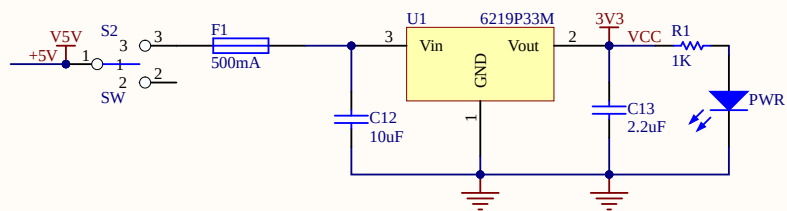

LED




USB




MCU


CH32x203K

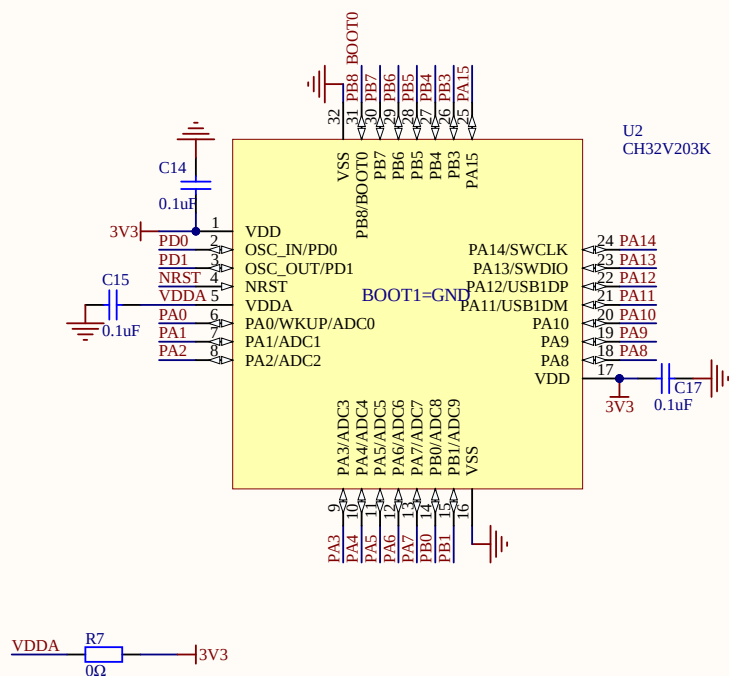


XTAL




RST




PIN

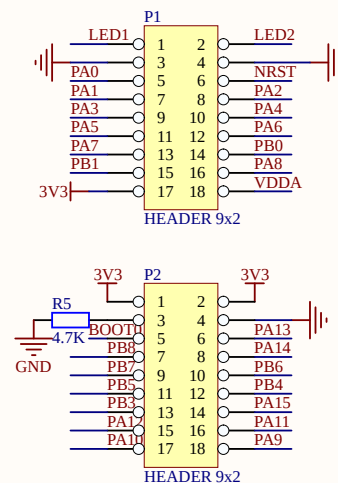


POWER

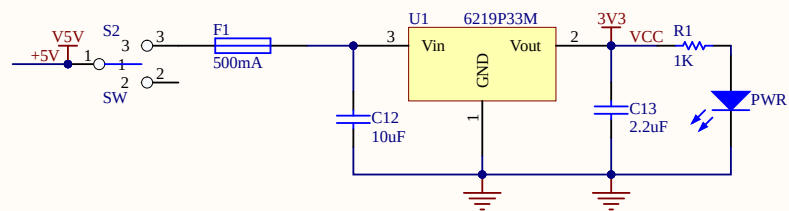

LED




USB




MCU


CH32x203K

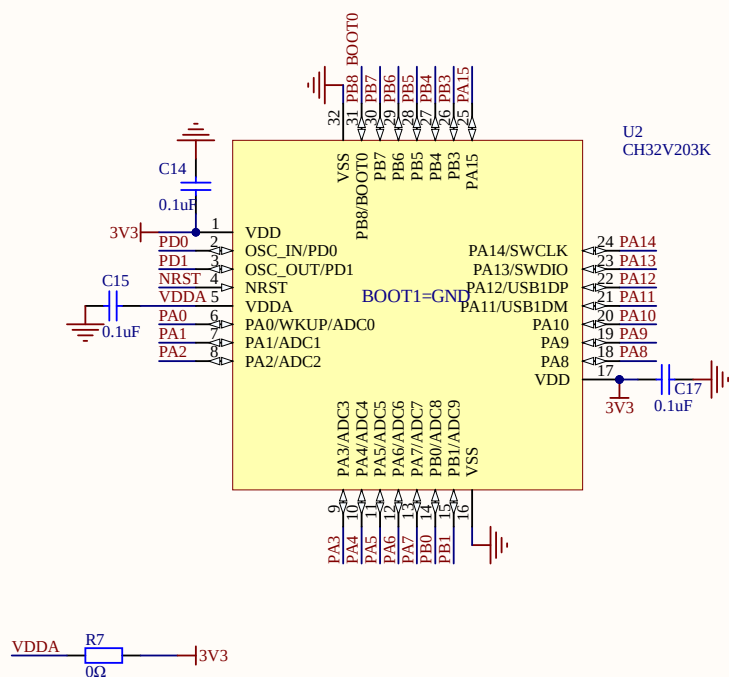


XTAL




PIN

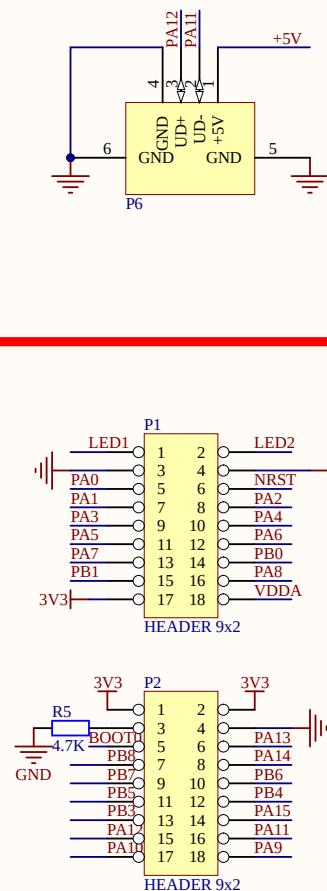

RST




POWER&USB

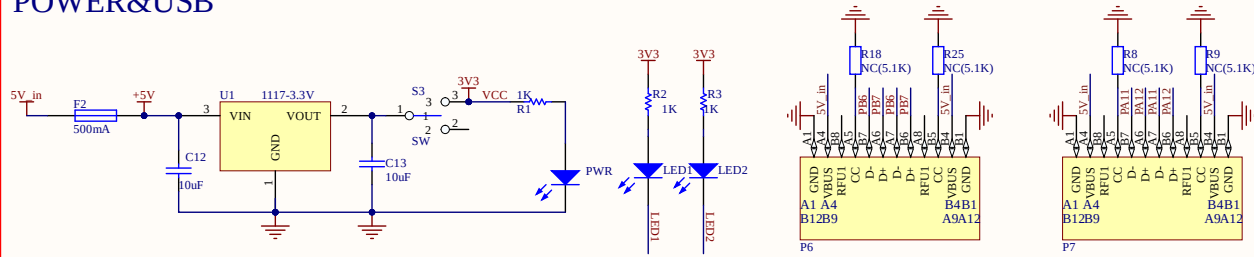


WCH_LinkE


MCU

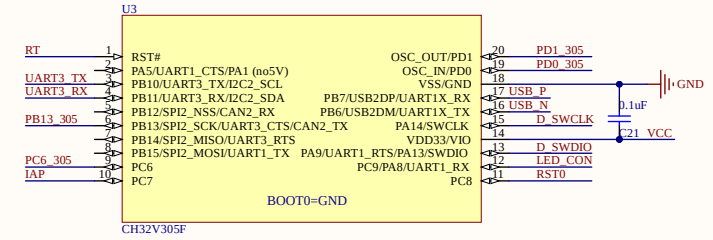


XTAL




MCU

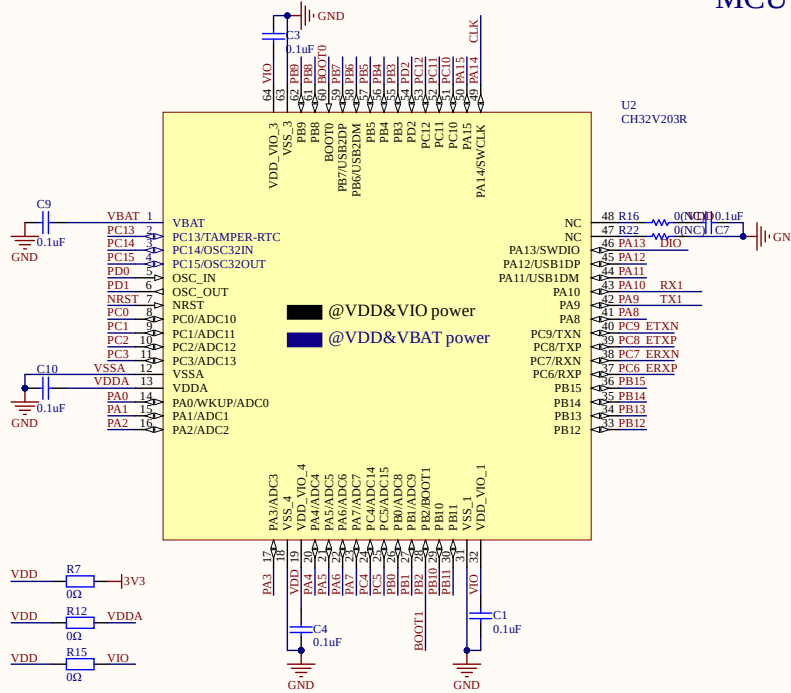


RST




KEY




IAP



LED





SWD&UART

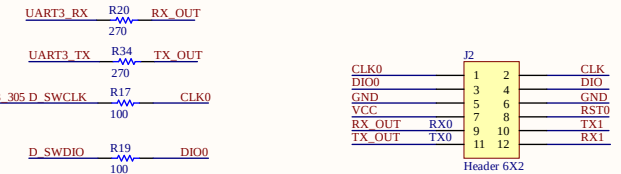


空闲时蓝灯常亮-ARM模式
空闲时蓝灯常灭-Risc-V模式

ARDUINO



ETH

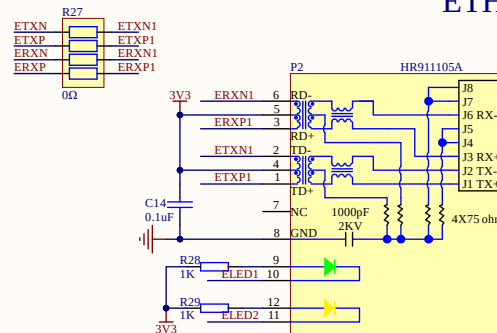

POWER&USB

