


Power: USB-C 5 V, 3.3 V regulator

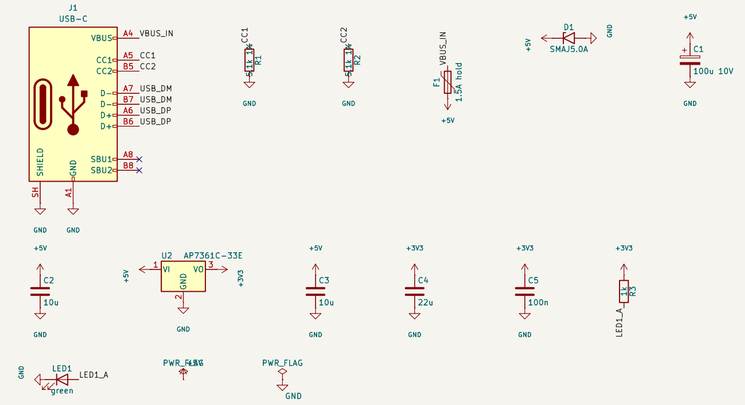


ESP32-WROOM-32E (never WROVER: GPIO 16/17 are outputs)

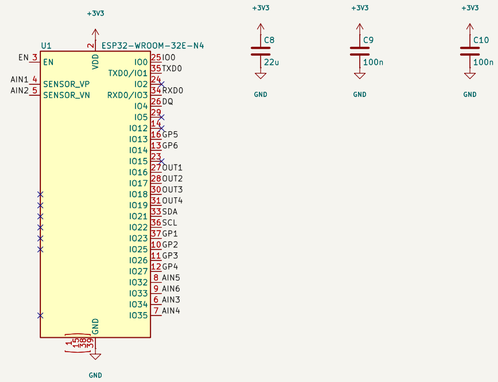


Outputs: R1/R2 relays (COM/NO/NC), R3/R4 G3MB-202P SSRs; off at boot

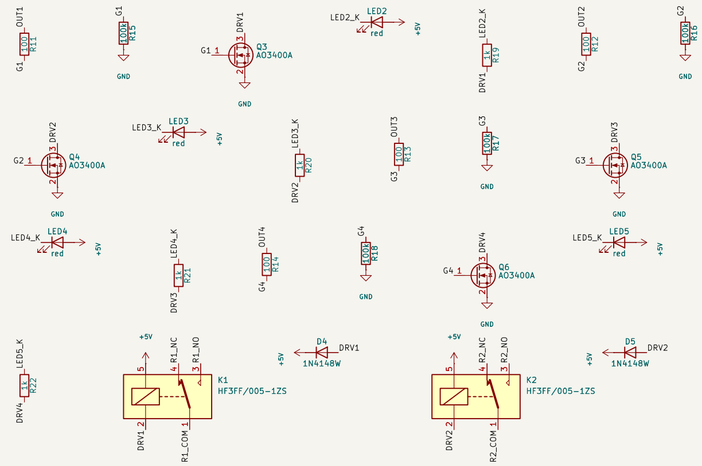


USB-serial (CH340C at 3.3 V) and auto-reset

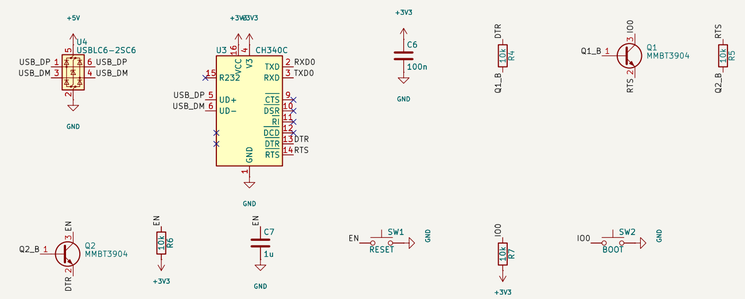

Analog inputs AI1–AI6: 0–10 V, 30k/10k divider (10 V = 2.5 V)

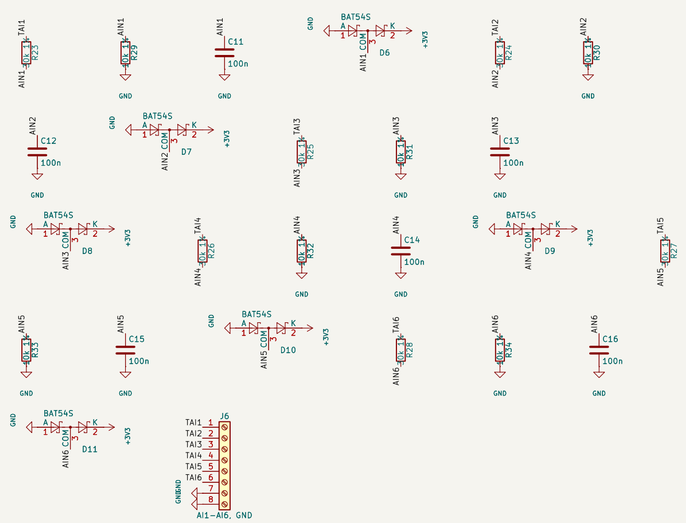

GPIO IO1–IO6 (3.3 V), I2C, 1-Wire

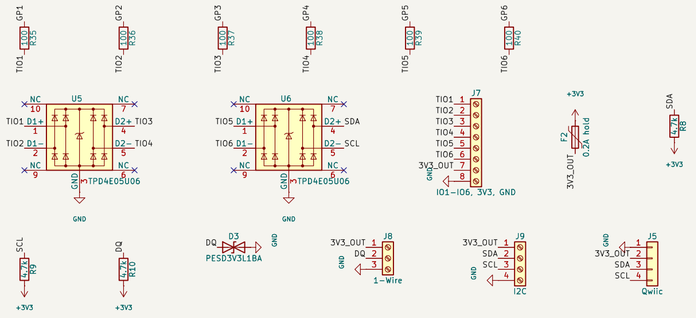

Board profile eos-mb1 (web/js/boards.js): keep GPIOs and terminal labels in step
Generated by gen_schematic.py from the design in README.md; edit the script, not this file

ExpressOS

Sheet: /
File: MB-1.kicad_sch

Title: MB-1: 6 analog in, 2 relays, 2 SSRs

Size: A2	Date:	**Rev: A**
KiCad E.D.A. 10.0.8		Id: 1/1