


Power: 12–24 V in, 5 V 1 A switching regulator

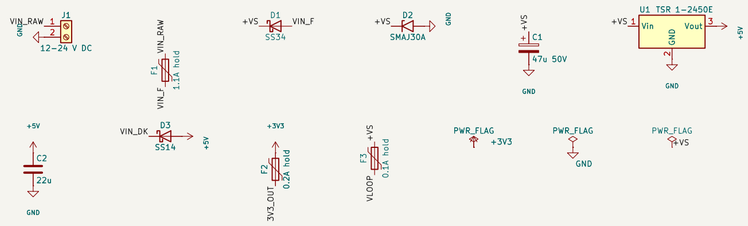


Relay module header R1–R4: MOSFET pulls the module input low (on)

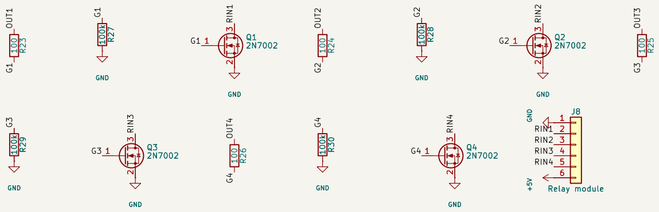


ESP32 DOIT DevKit V1 (30-pin) in two 1x15 sockets




Analog AI1–AI4: 0–10 V (30k/10k) or 4–20 mA (jumper: 150R shutt) -> ADS1115

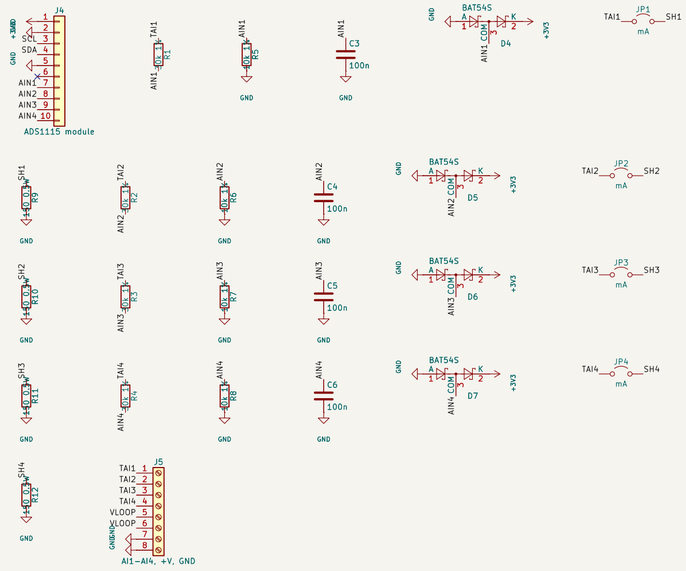


Inputs IN1–IN4: 0–3.3 V on GPIO 36, 39, 34, 35

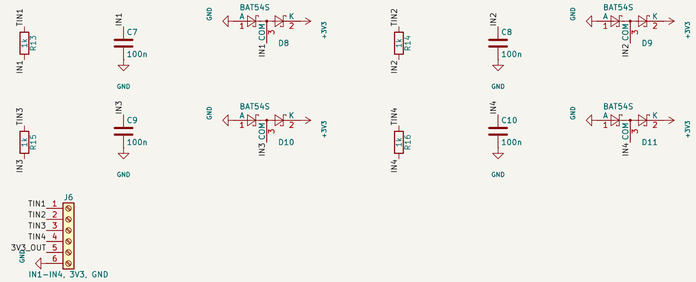

Touch T1–T6: GPIO 13, 14, 15, 27, 32, 33



GPIO IO1–IO3 (3.3 V), I2C + Qwiic, 1-Wire

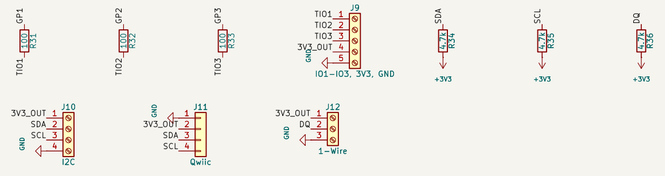

Board profile eos-mb2 (web/js/boards.js): keep GPIOs and terminal labels in step
Generated by gen_schematic.py from the design in README.md; edit the script, not this file

EspressOS

Sheet: /
File: MB-2.kicad_sch

Title: MB-2: sensor node, 4 analog in, 6 touch, relay-module header

Size: A2	Date:	**Rev: A**
KiCad E.D.A. 10.0.8		Id: 1/1