


f' = 18.85 mm

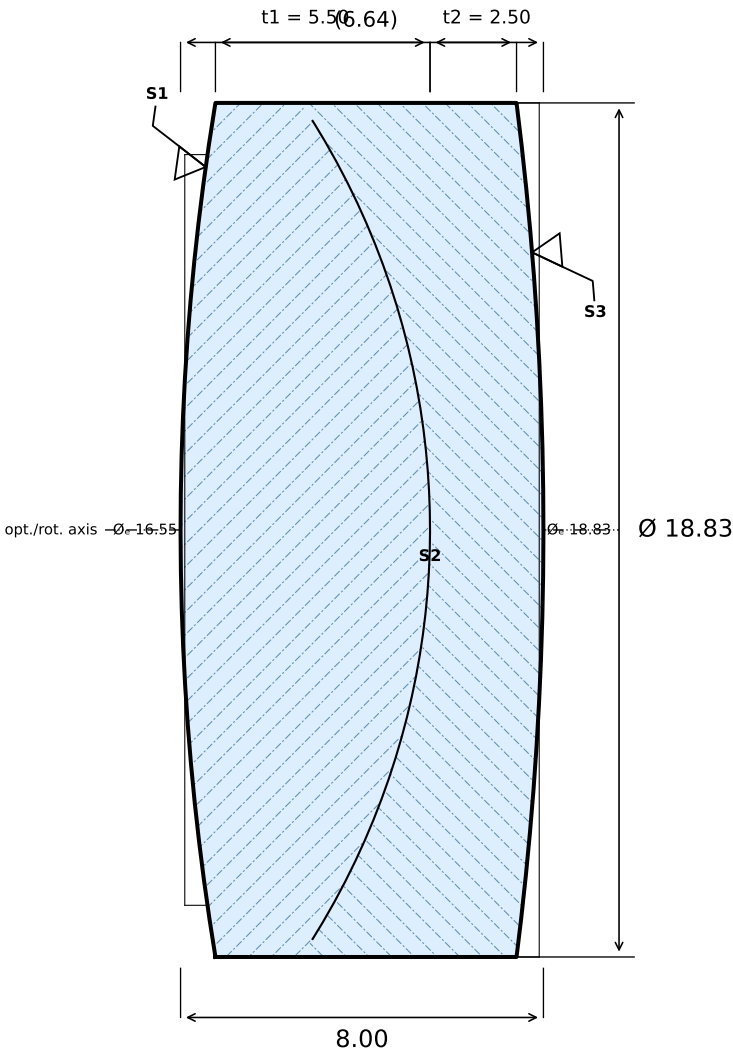

Ang. nach ISO 10110; λ = 546.07 nm

SURFACE 1 (FRONT)	GLASS 1	SURFACE 2 (CEMENT)	GLASS 2	SURFACE 3 (REAR)
R +58.000 CX Øe 16.55 3/ (0.5); λ=546.1 nm 4/ 0.5' 5/ 2×0.04 6/ — ⌀ 7/ — 13/ —	N-BAK1 (SCHOTT) nd = 1.5725 (587.6 nm) vd = 57.55 (587.6 nm) 0/ 6 nm/cm 1/ 1×0.10 2/ NH010; A	R -17.000 CC Øe 18.03 3/ (0.25); λ=546.1 nm 4/ 0.5' 5/ 5×0.016 6/ — ⌀ 7/ — 13/ — 15/ —	N-SF5 (SCHOTT) nd = 1.6727 (587.6 nm) vd = 32.25 (587.6 nm) 0/ 6 nm/cm 1/ 1×0.10 2/ NH010; A	R -75.000 CX Øe 18.83 3/ (0.5); λ=546.1 nm 4/ 0.5' 5/ 2×0.04 6/ — ⌀ 7/ — 13/ —

5-Element Photographic Objective OPT-003	B. Lutzer	K. Harrison	2026-07-26	6:1	3 / 1	A
ORGANISATION / PROJECT / PART NO.	DRAWN BY	APPROVED	DATE	SCALE	SHEET	REV
NOTES Cement with NOA-61 or equivalent UV adhesive.			DIM. IN mm GENERAL TOL. PER ISO 10110-11 Ø±0.10 CT±0.15 3/ 5 4/ 3' 5/ 2×0.063			