


f' = 96.75 mm

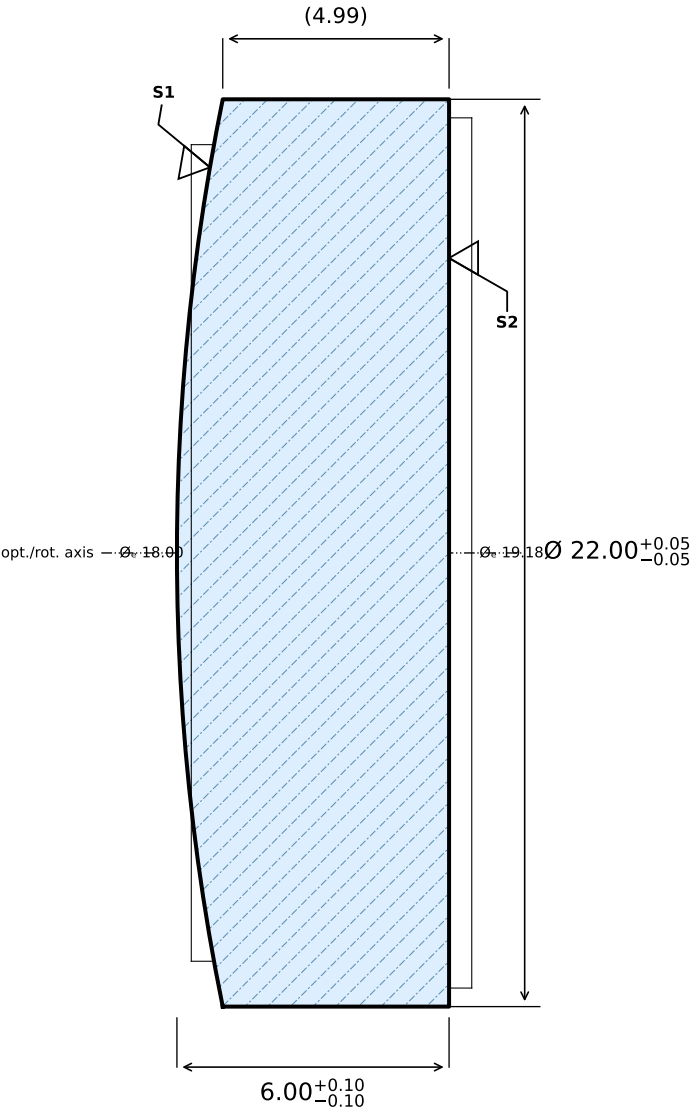

Ang. nach ISO 10110; λ = 546.07 nm

SURFACE 1 (FRONT)		MATERIAL		SURFACE 2 (REAR)		
R +50.000 ^{+0.2} _{-0.2} CX		N-BK7 (SCHOTT)		R ∞		
Ø _e 18.00		n _d = 1.5168 (587.6 nm)		Ø _e 19.18		
3/ (0.5); λ=546.1 nm		ν _d = 64.17 (587.6 nm)		3/ (1); λ=546.1 nm		
4/ 0.5'		0/ 10 nm/cm		4/ 1'		
5/ 2×0.04		1/ 1×0.16		5/ 2×0.063		
6/ —		2/ NH040; 2		6/ —		
⊙ 7/ AR 400-700 nm R<0.5%				⊙ 7/ —		
13/ —				13/ —		
Optiland / PX-Singlet PX-001		B. Lutzer	K. Harrison	2026-04-01	6:1	1 / 1
ORGANISATION / PROJECT / PART NO.		DRAWN BY	APPROVED	DATE	SCALE	REV
NOTES			DIM. IN mm GENERAL TOL. PER ISO 10110-11 Ø±0.10 CT±0.15 3/ 5 4/ 3' 5/ 2×0.063			