


f' = 18.85 mm

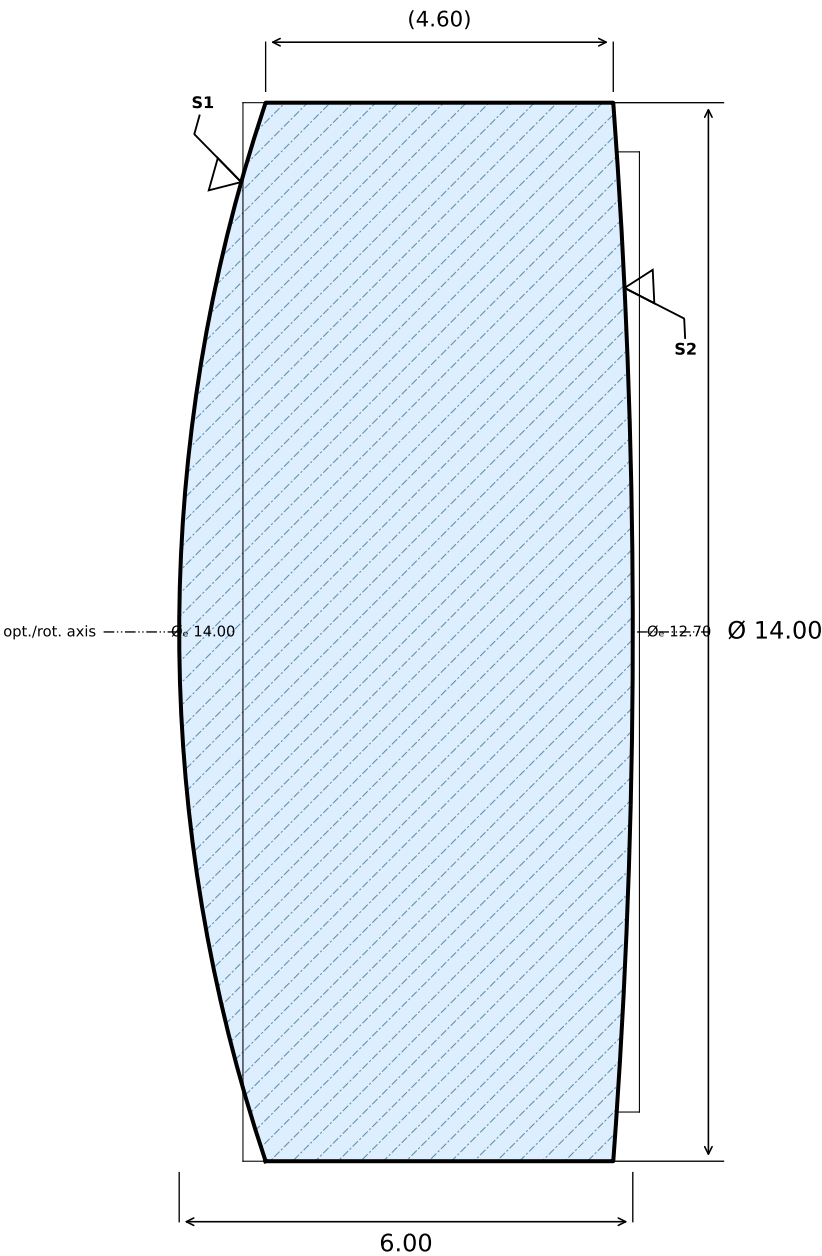

Ang. nach ISO 10110; $\lambda = 546.07\text{ nm}$

SURFACE 1 (FRONT)	MATERIAL	SURFACE 2 (REAR)
R +22.000 CX $\varnothing_e$ 14.00 3/ (0.5/0.25); $\lambda=546.1\text{ nm}$ 4/ 0.5' 5/ 2×0.04 6/ — ⌀ 7/ AR 400-700 nm, R<0.5% 13/ —	N-BK7 (SCHOTT) $n_d = 1.5168\text{ (587.6 nm)}$ $\nu_d = 64.17\text{ (587.6 nm)}$ 0/ 10 nm/cm 1/ 1×0.16 2/ NH010; A	R -95.000 CX $\varnothing_e$ 12.70 3/ (1); $\lambda=546.1\text{ nm}$ 4/ 0.5' 5/ 2×0.063 6/ — ⌀ 7/ AR 400-700 nm, R<0.5% 13/ —

5-Element Photographic Objective OPT-001

B. Lutzer

K. Harrison

2026-07-16

10:1

1 / 5

A

ORGANISATION / PROJECT / PART NO.

DRAWN BY

APPROVED

DATE

SCALE

SHEET

REV

NOTES

DIM. IN mm
GENERAL TOL. PER ISO 10110-11
 $\varnothing \pm 0.10$ CT ± 0.15 3/ 5 4/ 3' 5/ 2×0.063

