


f' = 18.85 mm



Ang. nach ISO 10110; λ = 546.07 nm

SURFACE 1 (FRONT)		MATERIAL		SURFACE 2 (REAR)			
R +28.000 CX Ø _e 13.18 3/ (0.5); λ=546.1 nm 4/ 0.5' 5/ 2×0.063 6/ — ⌀ 7/ AR 400-700 nm, R<0.5% 13/ —		N-SSK5 $n_d = 1.6584$ (587.6 nm) $\nu_d = 50.88$ (587.6 nm) 0/ 10 nm/cm 1/ 1×0.16 2/ NH004; B		R -80.000 CX Ø _e 12.22 3/ (1); λ=546.1 nm 4/ 0.5' 5/ 2×0.063 6/ — ⌀ 7/ AR 400-700 nm, R<0.5% 13/ —			
5-Element Photographic Objective OPT-004		B. Lutzer	—	2026-07-16	10:1	4 / 5	A
ORGANISATION / PROJECT / PART NO.		DRAWN BY	APPROVED	DATE	SCALE	SHEET	REV
NOTES				DIM. IN mm GENERAL TOL. PER ISO 10110-11 Ø±0.10 CT±0.15 3/ 5 4/ 3' 5/ 2×0.063			
							

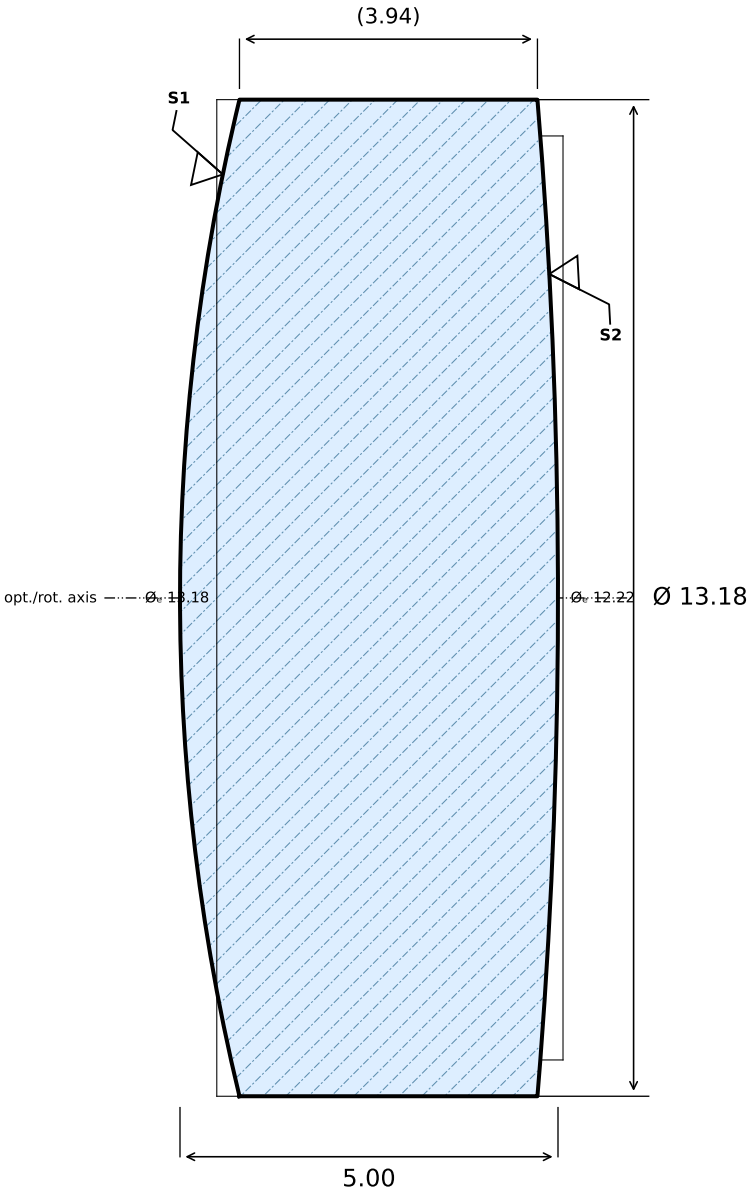