


f' = 18.85 mm

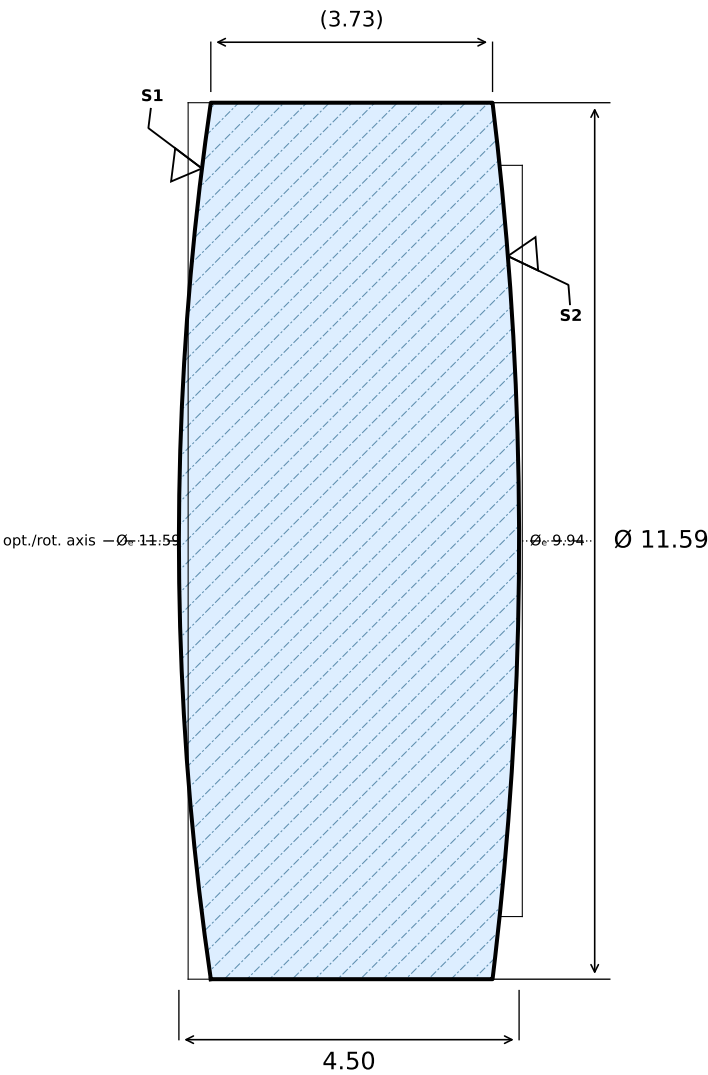

Ang. nach ISO 10110; λ = 546.07 nm

SURFACE 1 (FRONT)		MATERIAL		SURFACE 2 (REAR)			
R +40.000 CX Ø _e 11.59 3/ (0.5); λ=546.1 nm 4/ 0.5' 5/ 2×0.04 6/ — ⊙ 7/ AR 400-700 nm, R<0.3% 13/ —		N-LAK22 $n_d = 1.6511$ (587.6 nm) $\nu_d = 55.89$ (587.6 nm) 0/ 10 nm/cm 1/ 1×0.16 2/ NH010; A		R -48.000 CX Ø _e 9.94 3/ (0.5); λ=546.1 nm 4/ 0.5' 5/ 2×0.04 6/ — ⊙ 7/ AR 400-700 nm, R<0.3% 13/ —			
5-Element Photographic Objective OPT-005		B. Lutzer	—	2026-07-16	10:1	5 / 5	A
ORGANISATION / PROJECT / PART NO.		DRAWN BY	APPROVED	DATE	SCALE	SHEET	REV
NOTES				DIM. IN mm GENERAL TOL. PER ISO 10110-11 Ø±0.10 CT±0.15 3/ 5 4/ 3' 5/ 2×0.063			
							