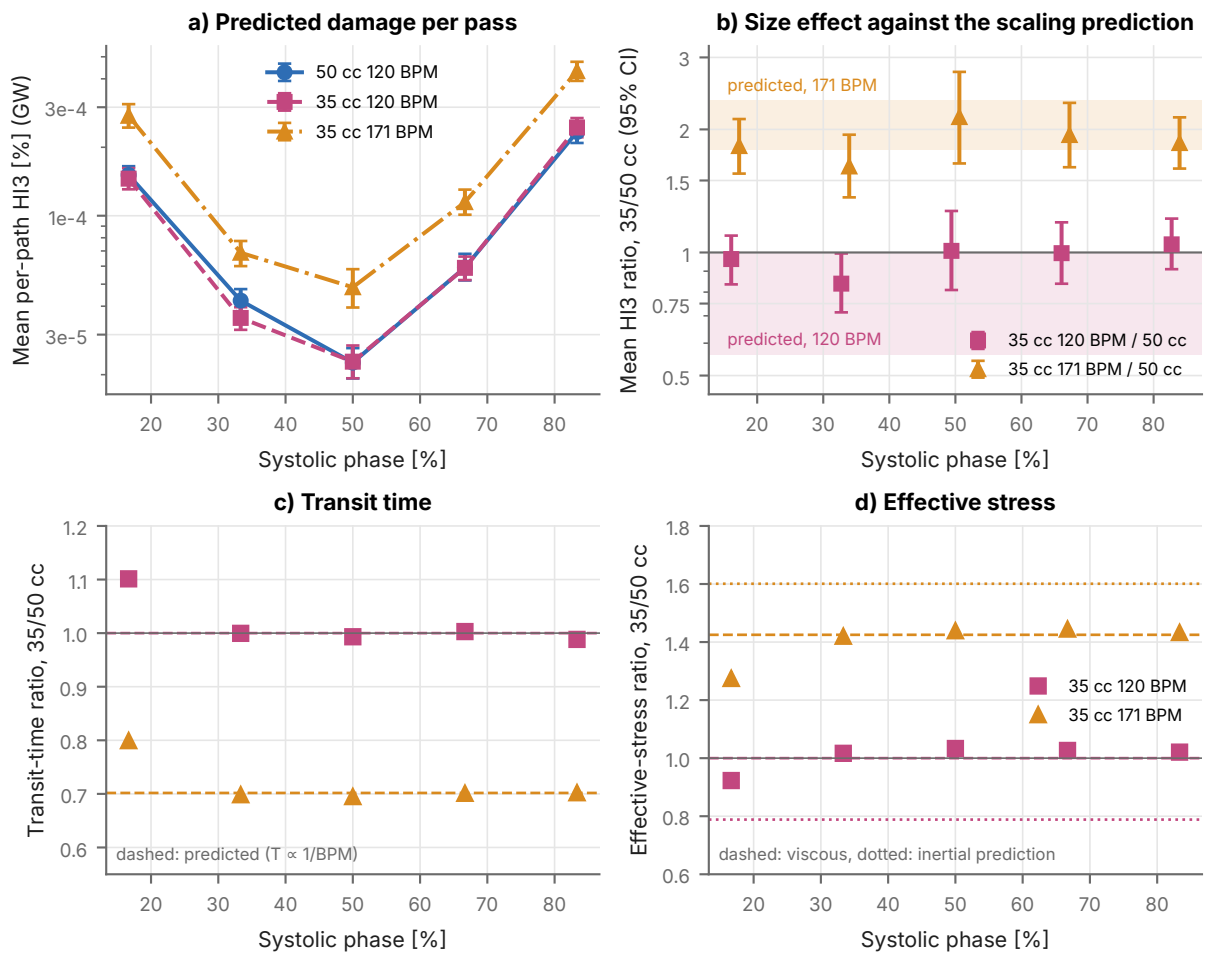
a) Predicted damage per pass
Mean per-path HI3 [%] (GW)
3e-4
1e-4
3e-5
50 cc 120 BPM
35 cc 120 BPM
35 cc 171 BPM
20
30
40
50
60
70
80
Systolic phase [%]
b) Size effect against the scaling prediction
Mean HI3 ratio, 35/50 cc (95% CI)
3
2
1.5
1
0.75
0.5
predicted, 171 BPM
predicted, 120 BPM
35 cc 120 BPM / 50 cc
35 cc 171 BPM / 50 cc
Systolic phase [%]
c) Transit time
Transit-time ratio, 35/50 cc
1.2
1.1
1.0
0.9
0.8
0.7
0.6
dashed: predicted (T ∝ 1/BPM)
Systolic phase [%]
d) Effective stress
Effective-stress ratio, 35/50 cc
1.8
1.6
1.4
1.2
1.0
0.8
0.6
35 cc 120 BPM
35 cc 171 BPM
dashed: viscous, dotted: inertial prediction
Systolic phase [%]