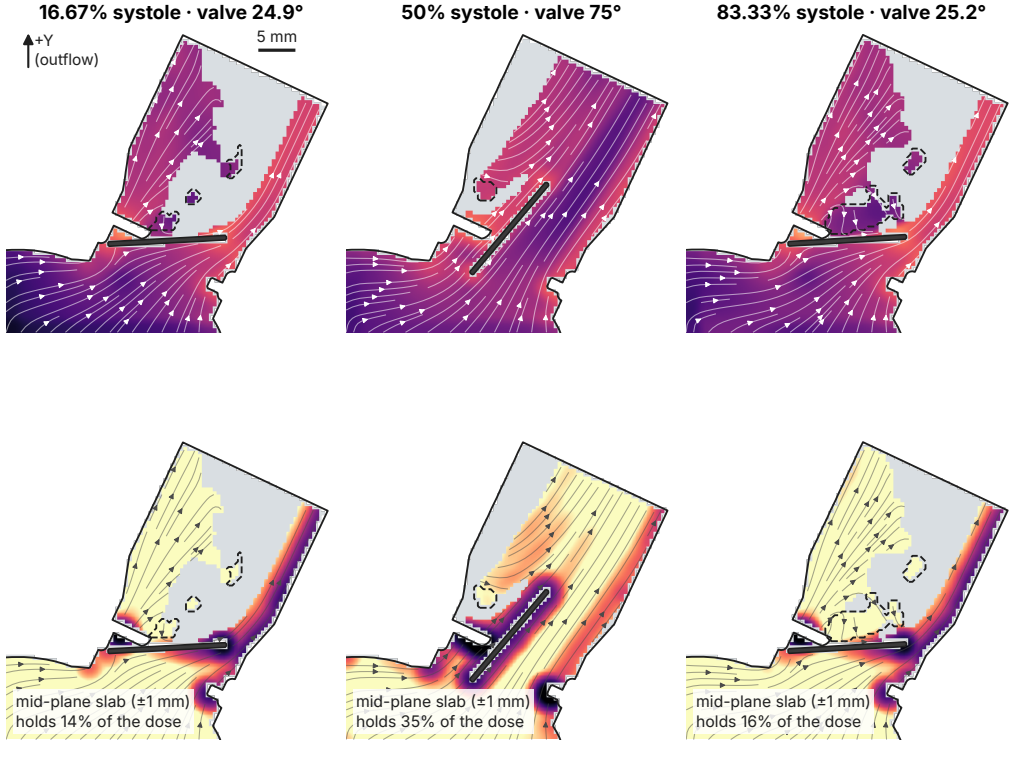

16.67% systole · valve 24.9°
50% systole · valve 75°
83.33% systole · valve 25.2°
+Y
(outflow)
5 mm
Local scalar stress [Pa]
10^{2}
10^{1}
10^{0}
10^{-1}
10^{-2}
lines: in-plane flow direction only
– – reversed axial flow (> 0.01 m/s)
grey: no path ±1 mm
Share of linear HI3 dose per mm² of slab
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
mid-plane slab (±1 mm) holds 14% of the dose
mid-plane slab (±1 mm) holds 35% of the dose
mid-plane slab (±1 mm) holds 16% of the dose