Base Station Electronics (BAS) System Architecture

ES00004

Rev: A01
Jinzhi Cai
2019–08–08

Contents

1 Introduction

1.1 Scope

This document is describe the design of OA-II Base Station Electronics (BAS) System such as the detail description of each component.

1.2 Purpose

The purpose is to come out a guide line document for the OA-II Base Station Electronics (BAS) System implementation.

1.3 Relevant Documents

ES00002 - ORBiT Avionics System II Architecture
ES00003 - OA-II Vehicle Electronics (VEH) System Architecture
ES00004 - OA-II Base Station Electronics (BAS) System Architecture
ES00005 - OA-II VEH Payload Modules General Architecture
ES00006 - OA-II VEH Payload Frame General Specifications

1.4 Revision History

Rev	Author	Approver	Changes	Date
A01	Jinzhi Cai		Initial draft	2019-7-28

Table 1: Summary of Revision History

2 Big Picture

The whole system have different part.

3 Main Control Facility (MCF)

The Main Control Facility shows vehicle information during flight. This includes a 3D map of the flight path, propulsion system temperatures and pressures, and IMU data. All the gound control personnel will be locate in the Main Control Facility The Main Control Facility will also have protect to protect all ground control personnel from rocket explosive. The It also will be able to connect to computer to allow analysis. A Main Control Facility will connect to different station, such as Launch Control Station(LCS), Terrestrial Telemetric Station(TTS), Ground Testing Station(GTS).

The Main Control Facility include three part.

Upstream Router The upstream router is performing communication between each station and the computer in the Main Control Facility. It also is the master in the whole Base Station Electronics System.

Remote Switch The Remote Switch will allow to separate one link to different link.

Power Station The power station is use to power all the Base Station Electronics System.
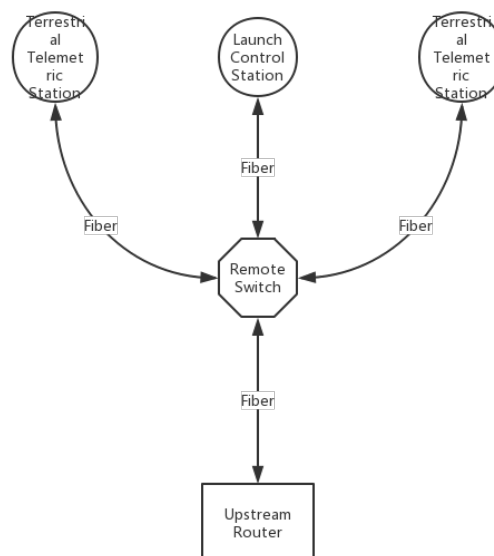

Figure 1: Block Diagram For Main Control Facility

4 Utility Station

4.1   Launch Control Station (LCS)

The Launch Control Station is majorly use to performs a launch sequence. It will take care all the need of the rocket and report the rocket status before launch. It also offer emergent cutoff.
It will have ability to perform any action the launch pad needed, which will be execute one processor inside the station. It will have ability to connect to the Main Control Facility. The processor in the station will detect any lose packet before execute any important step. The processor also will be able directly connect to the OA-II VEH COM which allow it upgrade and upload the software system of the rocket. The LCS also will connect with a camera system which will record and send back the whole rocket launching process.

4.2   Terrestrial Telemetric Station (TTS)

The Terrestrial Telemetric Station performs basic analysis on the live telemetry data. This includes displaying a Range Safe/Range Live indication, vehicle orientation from sensor fusion, flight profile stages, and error monitoring.
The Terrestrial Telemetric Station is preform two jobs. The first job is monitoring the vehicle status via the radio module. It will report the data it receive to the Main Control Facility connect to it. The second job is to use the antenna array to locating the rocket during and after flight and report it back to the MCF. In a mission, multiple TTS might required. Each TTS will have two to four antennas and a central processor to analyze the antenna data. All the TTS should locate near the MCF with a circular shape. All the location calculation will set the MCF as the origin.

4.3   Ground Testing Station(GTS)

The Ground Testing Station have two part, the **Propulsion Test Branch**, and **Avionics Test Branch**.

Propulsion Test Branch is majorly for the engine testing. It will help Main Control Facility to record and report testing engine thrust and thermo condition. It also will offer control on the rocket engine such as increase or cutoff fuel and oxidizer supply.

Avionics Test Branch is majorly for OA-II system testing. It will feed simulation data to the OA-II system and capture the result. It also will be able to simulate all the emergency that will happen on the rocket. While testing, it will be able to directly collect varies data from the OA-II VEH system such power consumption and temperature.