



Vehicle Electronics (VEH) System Architecture

ES00003

Rev: A03
Jinzhi Cai
2019-07-18

Table of Contents

1	General Setting	2
2	Payload Frame (PF)	3
2.1	Discription	3
2.2	Naming Method	3
3	Payload Modules (PM)	4
3.1	Discription	4
3.2	Computing and Operation Module (COM)	5
3.2.1	Main Control Unit (1)	5
3.2.2	Failure Recover Unit (2)	6
3.2.3	Sensor Fusion Unit (3)	6
3.3	Telecommunication and Acquisition Module (TAM)	6
3.3.1	Data Record Unit (1)	7
3.3.2	Telecommunication Unit (2)	7
3.3.3	Low Speed Sensor Unit (3)	7
3.3.4	High Speed Sensor Unit (4)	7
3.4	Power and Actuator Module (PAM)	7
3.4.1	Power Manager Unit (1)	7
3.4.2	Pyrotechnic Power Unit (2)	7
3.4.3	Actuator Power Unit (3)	7
3.5	Naming Method	7
4	Revision History	9

1 General Setting

In the OA-II VEH system, each payload module is specialize for a special function. In each module, it have three type of units.

Basic unit The basic unit is indecate this unit finish the most foundmental function of this module. It is a stand alone unit that build the foundation for the the unit. It will be the first unit in the module.

Feature Unit The feature unit is adding more features to the module. It usually need the basic unit to function and receive commend from the the basic unit.

For a functioning OA-II VEH, it only require the basic unit in COM and PAM. For more feature, more unit in each module is needed. In the most basic OA-II VEH system, it only contain two unit, the basic unit for COM and PAM.

2 Payload Frame (PF)

2.1 Discription

In the Payload Frame, most of the signal and power will run through it and arrive to the target unit. The payload frame will have different sectors for different modules. In general, it will at least provide three power lines, more than one command line, and four high-speed data lanes.

2.2 Naming Method

OA2-PF-XXX-YY-Z

XXX indicates how much unit it can fit for each module. The first number is for COM, then TAM and PAM.

YY Designer name.

Z Revision number. If it is greek numerals, it means this unit is a test bench.

example: OA2-PF-333-[JC-1]

First generation payload frame design by Jinzhi Cai which can contain three COM, TAM, PAM units.

example: OA2-PF-111-[JC-IV]

Fourth generation payload frame test bench design by Jinzhi Cai which can contain one COM, TAM, PAM units.

3 Payload Modules (PM)

3.1 Discription

Payload Modules are specialized circuits which slot into the Payload Frame. They can be divided into three primary types: Computing and Operation Module (COM), Telecommu-
nication and Acquisition Module (TAM), and Power and Actuator Module (PAM).

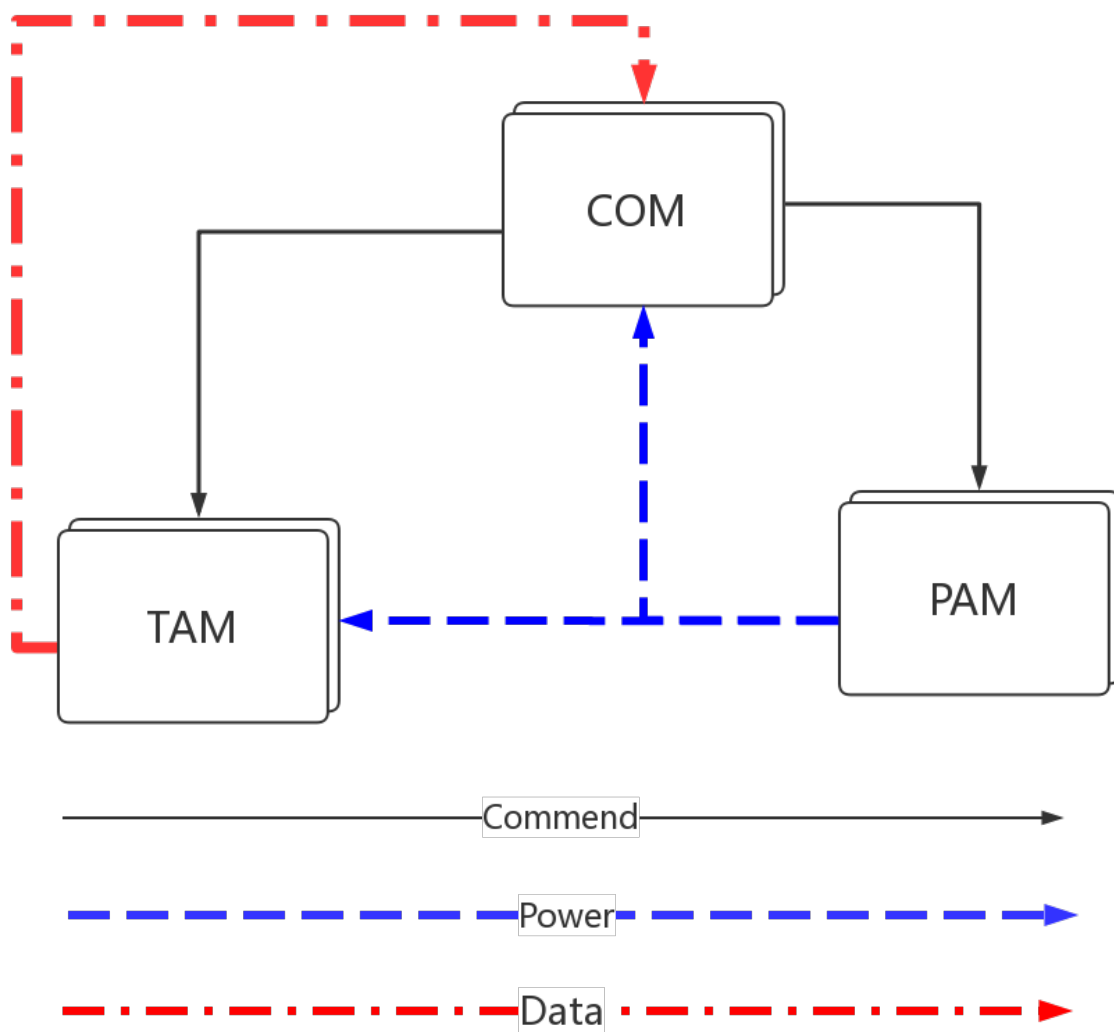


Figure 1: System Diagram

3.2 Computing and Operation Module (COM)

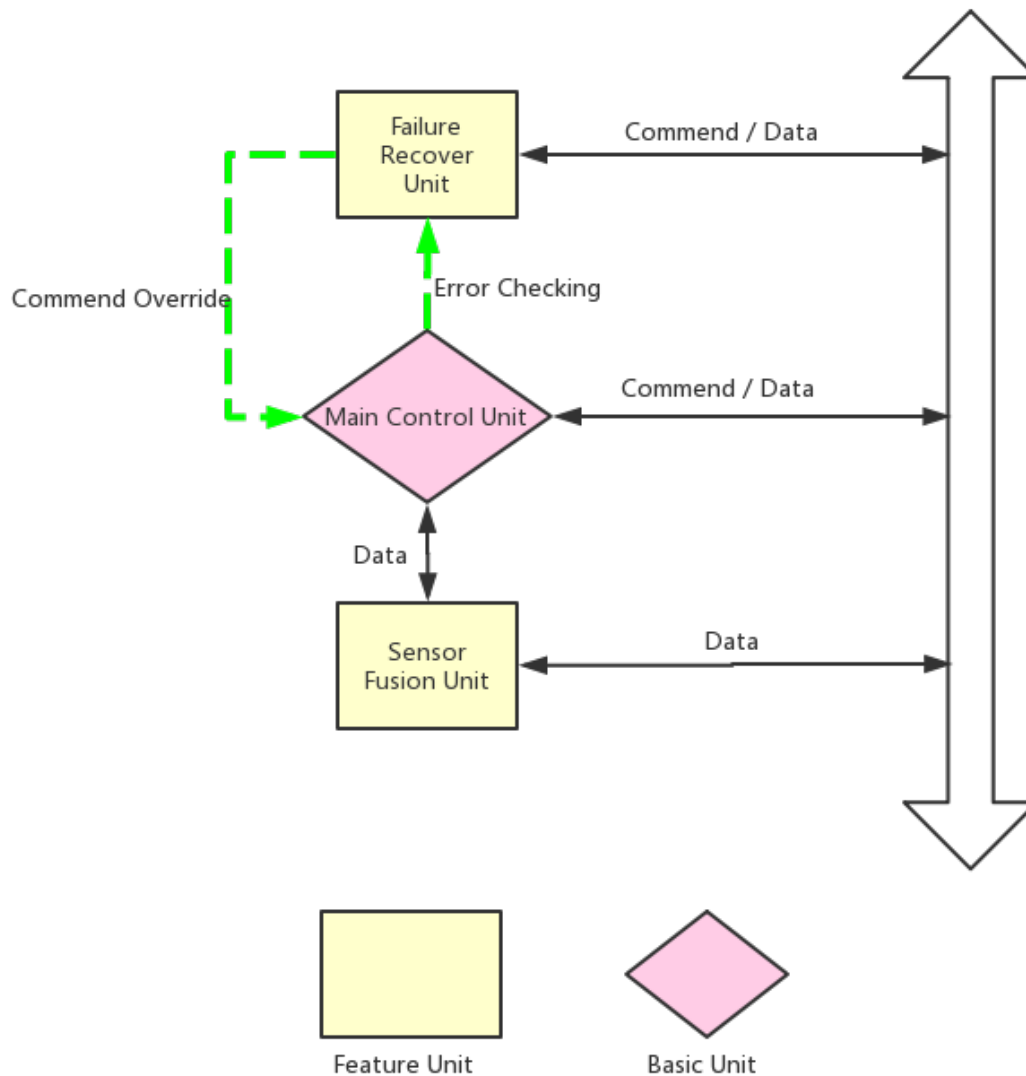


Figure 2: Computing and Operation Module Diagram

3.2.1 Main Control Unit (1)

The main control unit will execute all the critical process during the whole launch. It will send commend via a commend lane to other module main unit to perform action. **This unit is require for all the OA-II VEH system.**

3.2.2 Failure Recover Unit (2)

The failure recover unit will execute similar code as the main control unit and detect any error that send out from the main control unit. When main control unit have error, it will inquire the main unit and check the answer. If a failure scenario is fullfill, it will take over the commend line and try to fix the problem by the program storage inside.

3.2.3 Sensor Fusion Unit (3)

The sensor fusion unit will communicate with the TAM and analyze the data. It will provide to the main control unit for more information.

This unit will be include in the improved version.

3.3 Telecommunication and Acquisition Module (TAM)

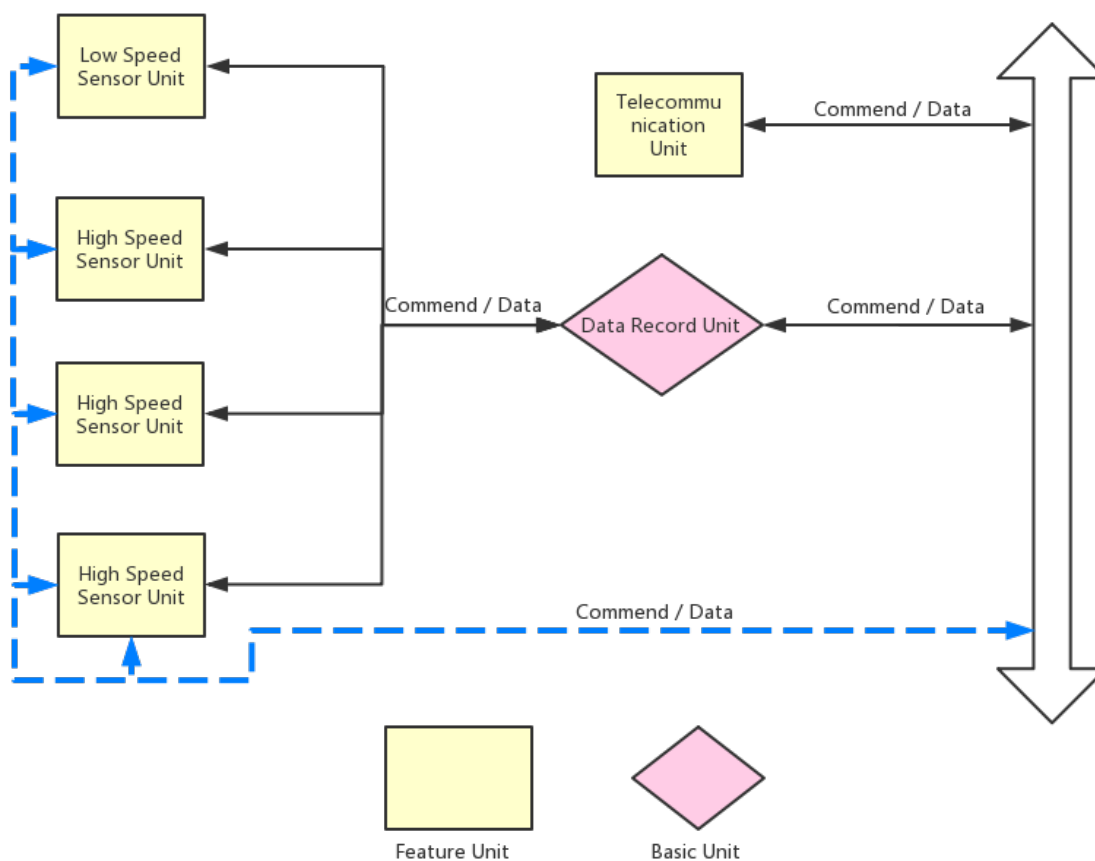


Figure 3: Telecommunication and Acquisition Module Diagram

3.3.1 Data Record Unit (1)

The data record unit is use to record log and data which send from the COM control. It will also include additional protection for protect storage unit from heavy impact.

3.3.2 Telecommunication Unit (2)

The telecommunication unit is use to collect data from the record unit and send it down to the base station. It also will get commend that send from the base station and relay it to the COM.

3.3.3 Low Speed Sensor Unit (3)

The low speed sensor unit is use to contain sensors that have less then 100MB/s data rate. This unit will also have memory to buffering some of the data. The power supply for this unit will be a low voltage line from the PAM.

3.3.4 High Speed Sensor Unit (4)

The high speed sensor unit will use to contain sensors that have more than 100MB/s (ex: camera)

3.4 Power and Actuator Module (PAM)

3.4.1 Power Manager Unit (1)

The power manager unit is use to control charge and discharge of the on unit main battery. It also have regulator to provide main rail power for the whole vehicle. **This unit is require for all the OA-II VEH system.**

3.4.2 Pyrotechnic Power Unit (2)

This unit contain spcial purpose voltage regulator and pyrotechnic driver. It will use to control the pyrotechnic device in the ship base on the commend come from the COM.

3.4.3 Actuator Power Unit (3)

This unit contain spcial purpose voltage regulator and actuator driver. It will use to control the actuator in the ship base on the commend come from the COM.

3.5 Naming Method

OA2-<COM/PAM/TAM>-XXX-[YY-Z]

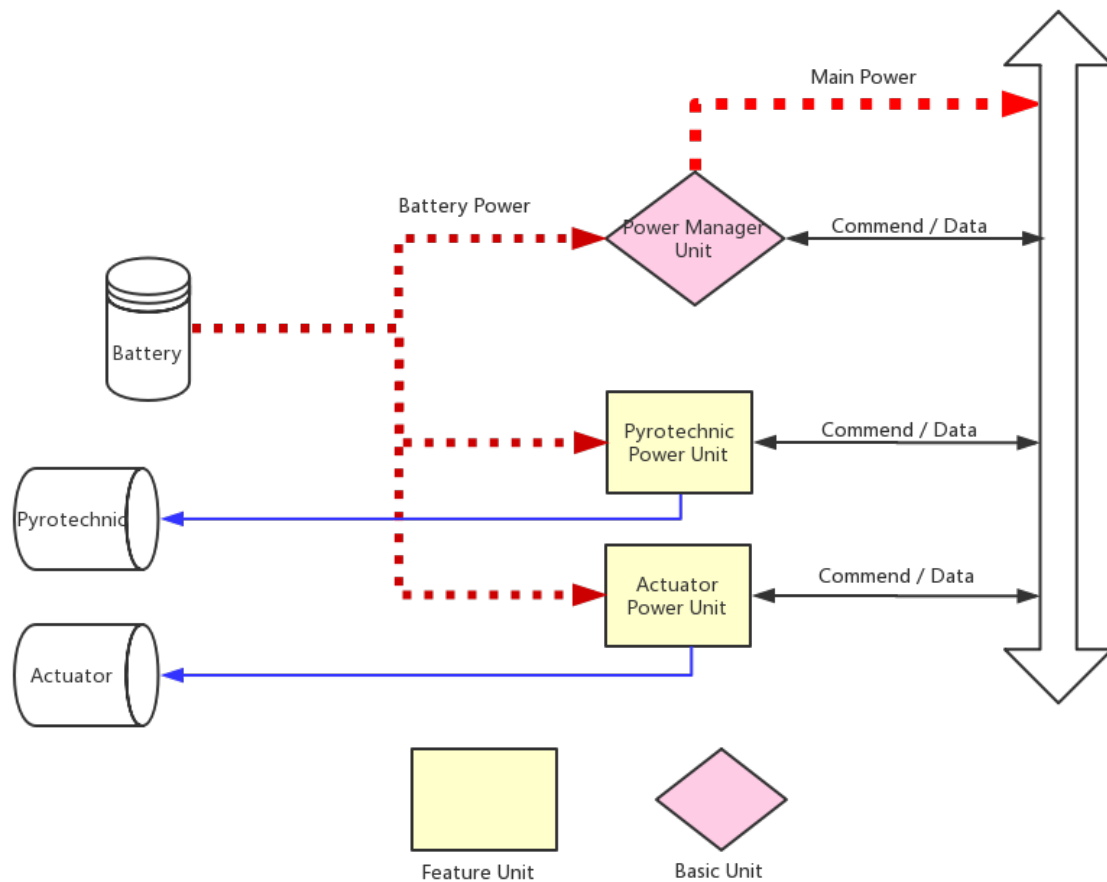


Figure 4: Power and Actuator Module Diagram

XXX The first letter is indicate which kind of rocket it fit for. **H** for high power,**N** for general purpose, **S** for small scale. The number follow it is depend unit. The last number is what this unit belongs to.

YY Designer name.

Z Revision number.

example: OA2-COM-N01-[JC-1]

First generation Computing and Operation Module main unit design by Jinzhi Cai.

4 Revision History

Rev#	Editor	Delta	Date
A01	Jinzhi Cai	Initialize	2019-7-2
-	Jinzhi Cai	change name from "board" to "unit"	2019-7-3
-	Jinzhi Cai	change naming method	2019-7-3
A02	Jinzhi Cai	change PAM unit description	2019-7-3
-	Jinzhi Cai	add diagram	2019-7-3
A03	Jinzhi Cai	change DRU	2019-7-8

Table 1: Summary of Revision History