
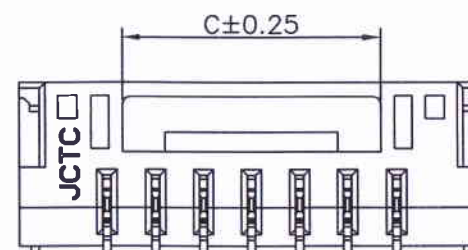

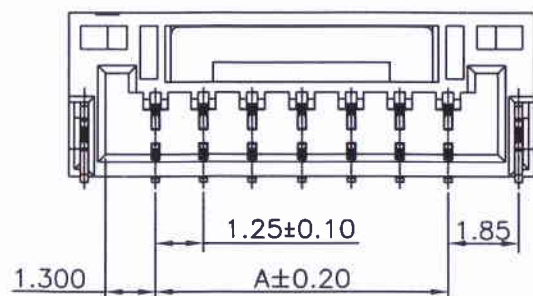
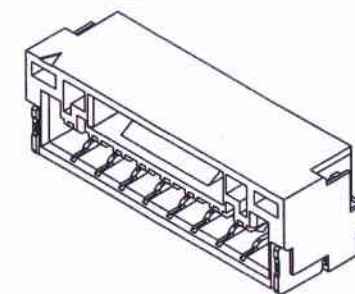
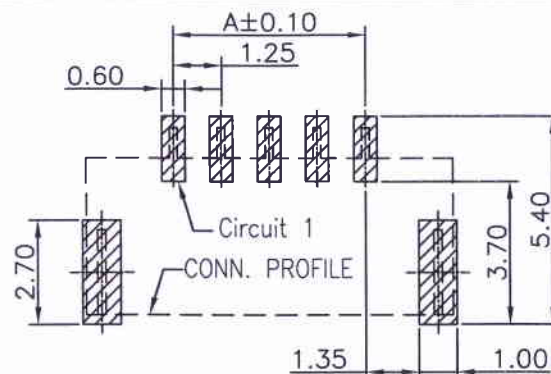
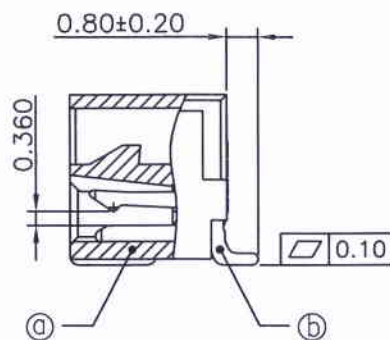


RoHS

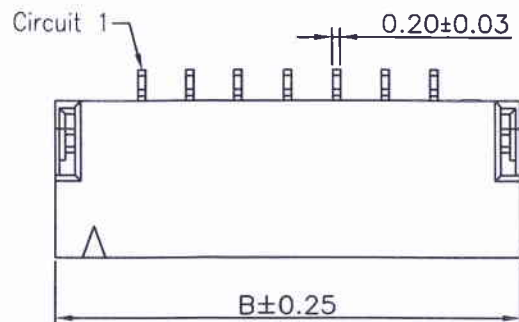

Specifications:  
Voltage Rating : 50V AC/DC  
Current Rating : 1A AC/DC  
Withstand Voltage : 500V AC/minute  
Contact Resistance : 30mΩ(MAX.)  
Insulation Resistance : 100MΩ(MIN.)  
Temperature Range : -25°C~+85°C

11257W90-NP-S-HF-R

① ② ③ ④ ⑤ ⑥

- ① Series No.  
② W90 : Side Contact  
W00 : Up Contact  
③ No. of Circuits  
④ S : SMT Type  
⑤ HF : Halogen Free  
⑥ R : Reel pack

Dimensional Ordering Information

Circuits Part No	Dimensions		
	A	B	C
2P	--	5.75	2.05
3P	2.50	7.00	3.30
4P	3.75	8.25	4.50
5P	5.00	9.50	4.50
6P	6.25	10.75	6.70
7P	7.50	12.00	6.70
8P	8.75	13.25	6.70
9P	10.00	14.50	6.70
10P	11.25	15.75	8.65
11P	12.50	17.00	8.65
12P	13.75	18.25	8.65
13P	15.00	19.50	8.65
14P	16.25	20.75	8.65
15P	17.50	22.00	8.65



Part No.	Material	Pin Material	Solder Tabs	Color
11257W90-NP-S	High temperature plastic,UL94V-0	Phosphor Bronze/Tin-plated	Brass/Tin-plated	Natural(Beige)
11257W90-NP-S-HF	High temperature plastic,UL94V-0	Phosphor Bronze/Tin-plated	Brass/Tin-plated	Natural(Beige)
11257W90-NPA-S-HF	High temperature plastic,UL94V-0	Phosphor Bronze/Tin-plated	Brass/Tin-plated	Black
11257W90-NP-S-3E-HF	High temperature plastic,UL94V-0	Phosphor Bronze/ Matte tin-plated	Brass/ Matte Tin-plated	Natural(Beige)

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
C1	新增无卤规格	11.10.02	SIZE: A4	0.0±0.25	X° REF±6°	APPROVED	邓群庄	16.11.07
C2	整理图面	13.01.07		0.00±0.15	X° ±3°	DESIGNER	邓群庄	16.11.07
C3	WN1606290091	16.06.30		0.000±0.08	X° X'±2°	DRAWN	邓群庄	16.11.07
C4	WN1610310182	16.11.07						

**JCTC** 胜蓝科技股份有限公司  
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

PART. NO:  
11257W90-NP-S-XX

DWG. NO:  
ENDE05



REV: C4 SHEET: 1/2

GHR 1.25mm PITCH 90° SMT WAFER

RoHS


02~11 Contacts

12~15 Contacts

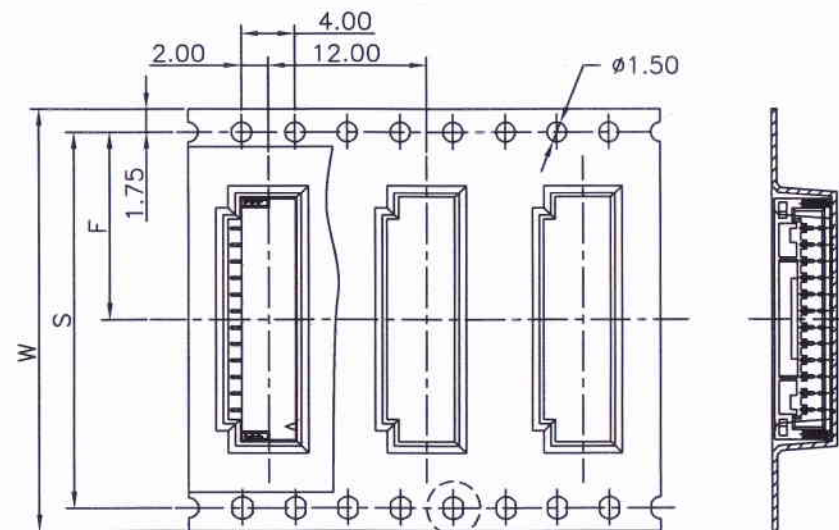
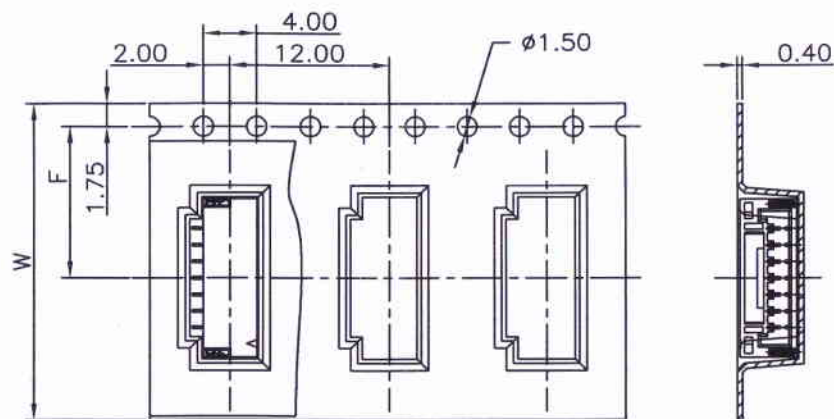


Unreeling direction

Unreeling direction

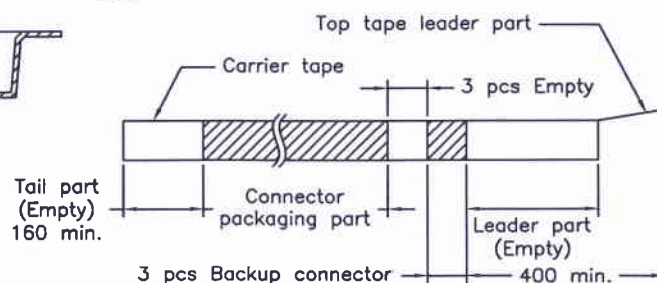

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16	7.50		1,000
03P	16	7.50		1,000
04P	16	7.50		1,000
05P	16	7.50		1,000
06P	24	11.50		1,000
07P	24	11.50		1,000
08P	24	11.50		1,000
09P	24	11.50		1,000
10P	24	11.50		1,000
11P	24	11.50		1,000
12P	32	14.20	28.40	1,000
13P	32	14.20	28.40	1,000
14P	32	14.20	28.40	1,000
15P	32	14.20	28.40	1,000

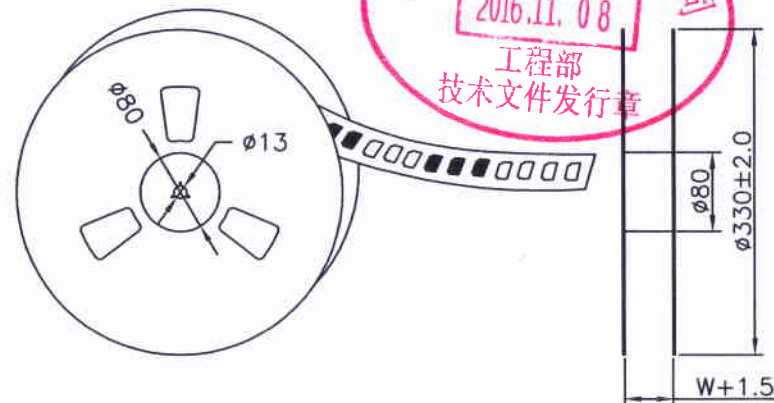

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO:
C1	新增无卤规格	11. 10. 02	LINEAR	1:1			11257W90-NP-S-XX
C2	整理图面	13. 01. 07	ANGLES	APPROVED	邓群庄	16. 11. 07	DWG. NO:
C3	WN1606290091	16. 06. 30	0.0±0.25	DESIGNER	邓群庄	16. 11. 07	ENDE05
C4	WN1610300182	16. 11. 07	0.00±0.15	DRAWN	邓群庄	16. 11. 07	REV: C4 SHEET: 2/2
			0.00±0.08				

**JCTC** 胜蓝科技股份有限公司  
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

GHR 1.25mm PITCH 90° SMT WAFER