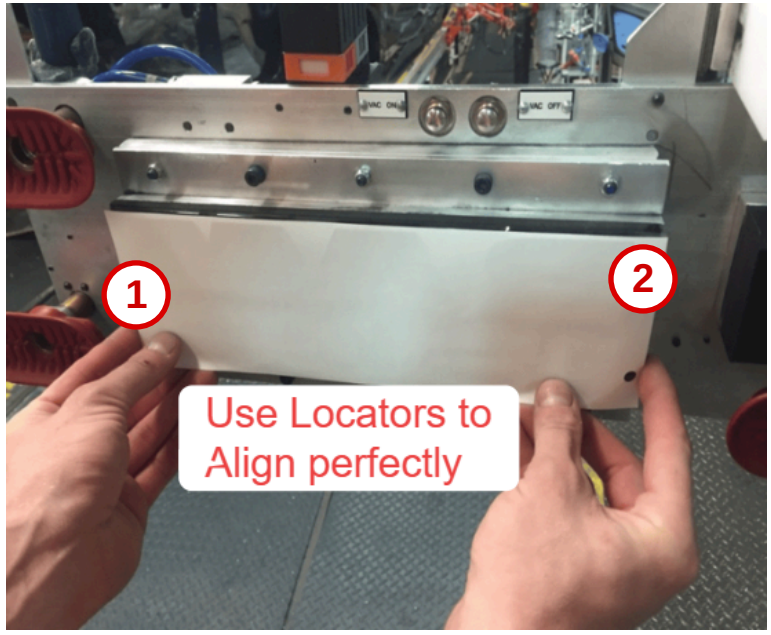
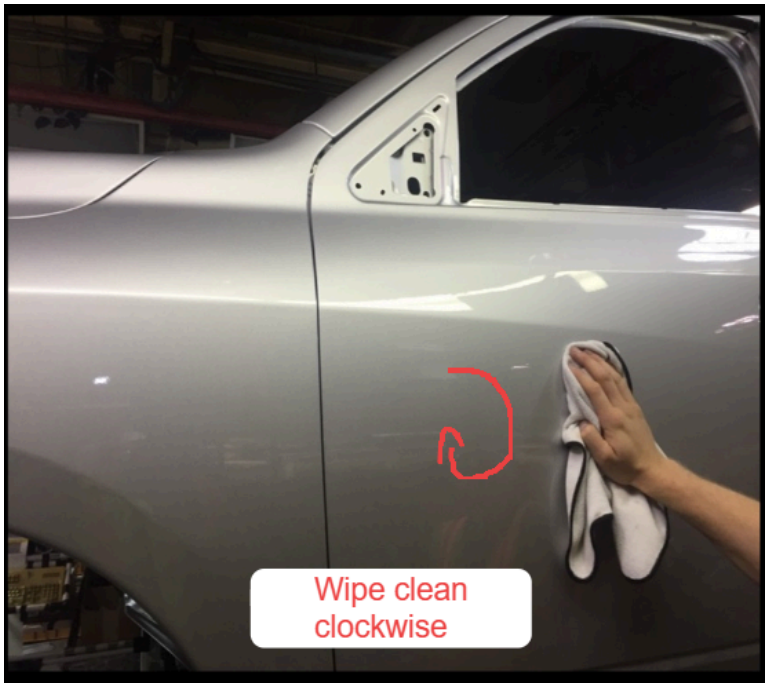
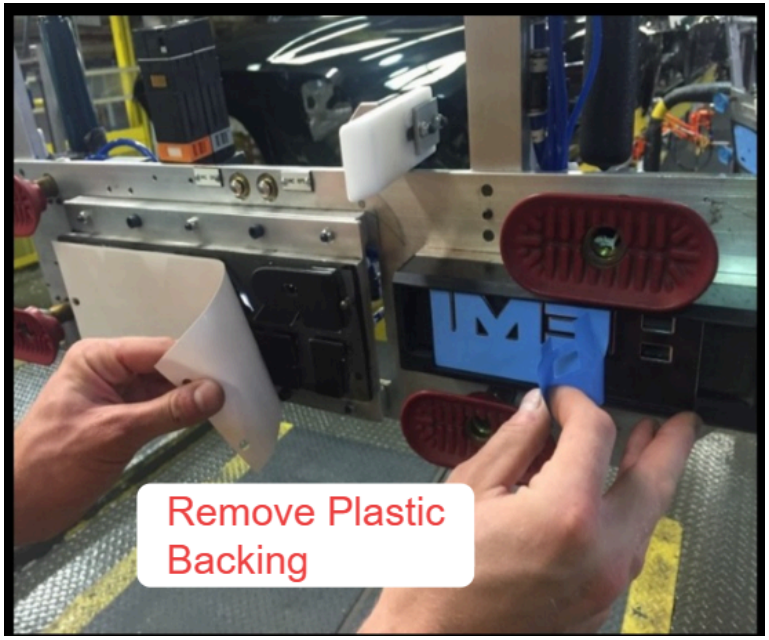
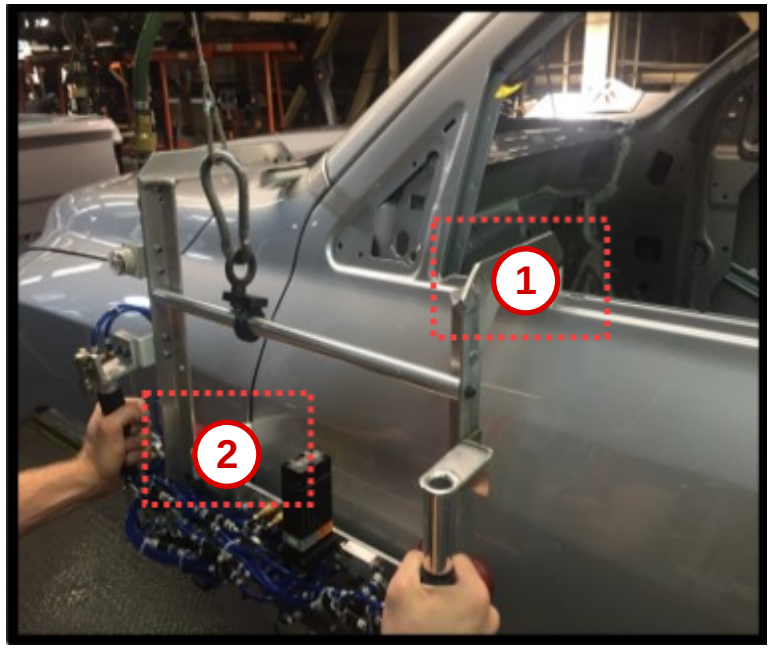
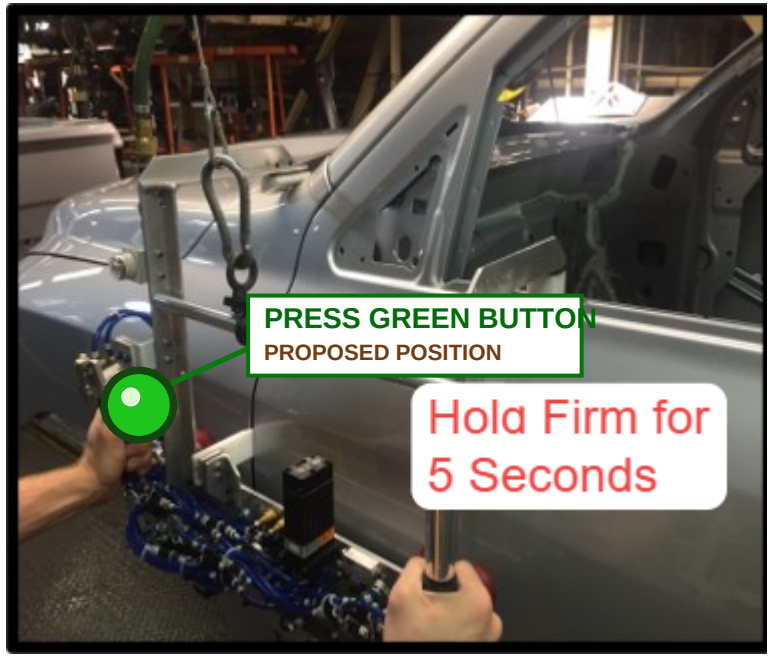
Badge Install

Description	Department	Status:	#
Installation of HEMI Badge to the vehicle	Assembly	Approved	SW-0002-V1.1
	Line or Cell: Trim 2	Approver: DCC_Detroit	
	Station: 1940L	Author: DCC_Detroit	
	Signature Shift 1:	Signature Shift 2:	Signature Shift 3:

Steps	Pictures	Instructions	Reminders
1		Insert the HEMI badge into the fixture using Locator 1 first, then Locator 2. Ensure the badge backing faces the operator.	Ensure

Steps	Pictures	Instructions	Reminders
2		Clean the badge installation area using an approved alcohol wipe. Wipe 3 times clockwise. Ensure the surface is dry and free of dust, oil, and residue. Discard the wipe in the designated bin.	
3		Remove the badge backing only after the vehicle enters the station. Do not touch or contaminate the adhesive surface. Discard the backing in the designated bin only.	

Steps	Pictures	Instructions	Reminders
4		Hold the fixture with both hands. Align Reference Position 1, then 2. Seat the fixture fully and confirm it is flush with the vehicle body.	
5		Press the GREEN button to activate the fixture. Automatic pressure is applied for 5 seconds. Hold the fixture steady until the BEEP sounds.	

Steps	Pictures	Instructions	Reminders
6		Retract the fixture straight back without touching the badge. Check that the badge is straight, firmly attached, and free of gaps, scratches, damage, or contamination. STOP and notify the team leader if any defect is found.	