

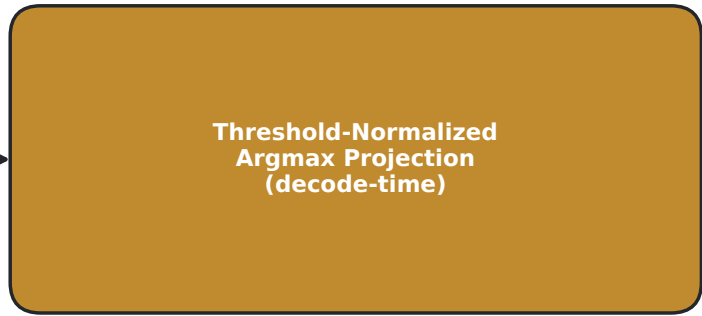


Independent binary heads
(resid / AT_WORK / AT_RETAIL),
calibrated logit-adjusted
sigmoid outputs

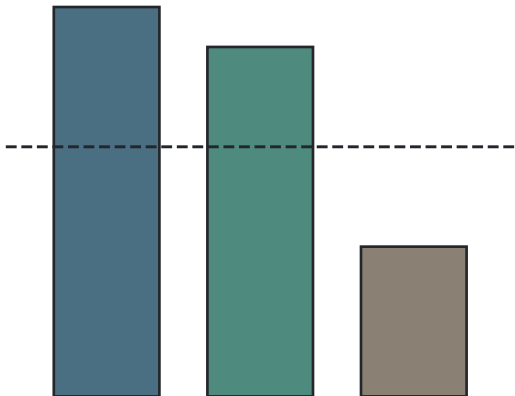

Mutually exclusive one-hot
decode, 100% physical
consistency

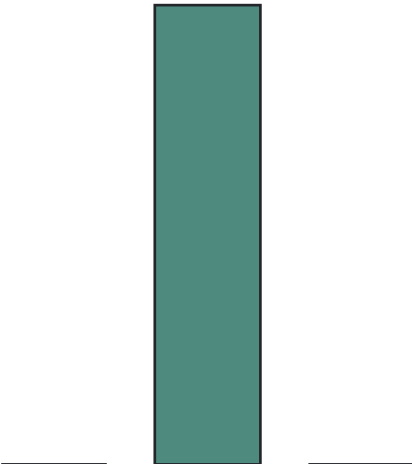

Impossible-State Rate (ISR): slots with more than one of AT_HOME, AT_WORK,
AT_RETAIL active

raw ISR <= 0.5%



raw

0% after
projection



after projection

ISR <= 0.5% raw; = 0% after the decode-time projection (dr_L3-12)