



Lokacija	DAFRA D.O.O.
Datum	07.10.2024 – 15.10.2024

Elektro komponente:

Uporovni termometer MWT180/A – pt100, 0.1°C resolucija	Temp. okolice
Termoelement MTC180, K tip, 1°C resolucija	Temp. okolice
Termoelement MTC180, K tip, 1°C resolucija	Temp. orodja
Termoelement MTC180, K tip, 1°C resolucija	Temp. ohišja aktuatorja
Termistor, PTC 1000	Egasi – temp. navitja
Kollmorgen AKD 6A	Servo ojačevalnik
Siemens S7 1215 – PLK	Procesni krmilnik

Elektro-mehanske komponente:

Egasi - servo aktuator	Translacijski aktuator
------------------------	------------------------

Oprema:


Stiskalnica	RVD-32-720HS
Orodje	89990-11
Izdelek (Vtiskovanje v trak)	39900-51 (#40461 – DC01 0,50x30) Pomik 16mm Hod: 20mm Hitrost: 250min-1

Programske nastavitve:


Kollmorgen AKD, servo – hitrost	250mm/s
Kollmorgen AKD – pospešek	5600mm/s ²
Kollmorgen AKD – pojemek	5600mm/s ²
Kollmorgen AKD – max. tok	1.5Arms
Siemens – Aktivacijski kot preše	270° - 90°
Ciklični čas	5ms



100RPM, brez traku, brez obremenitve

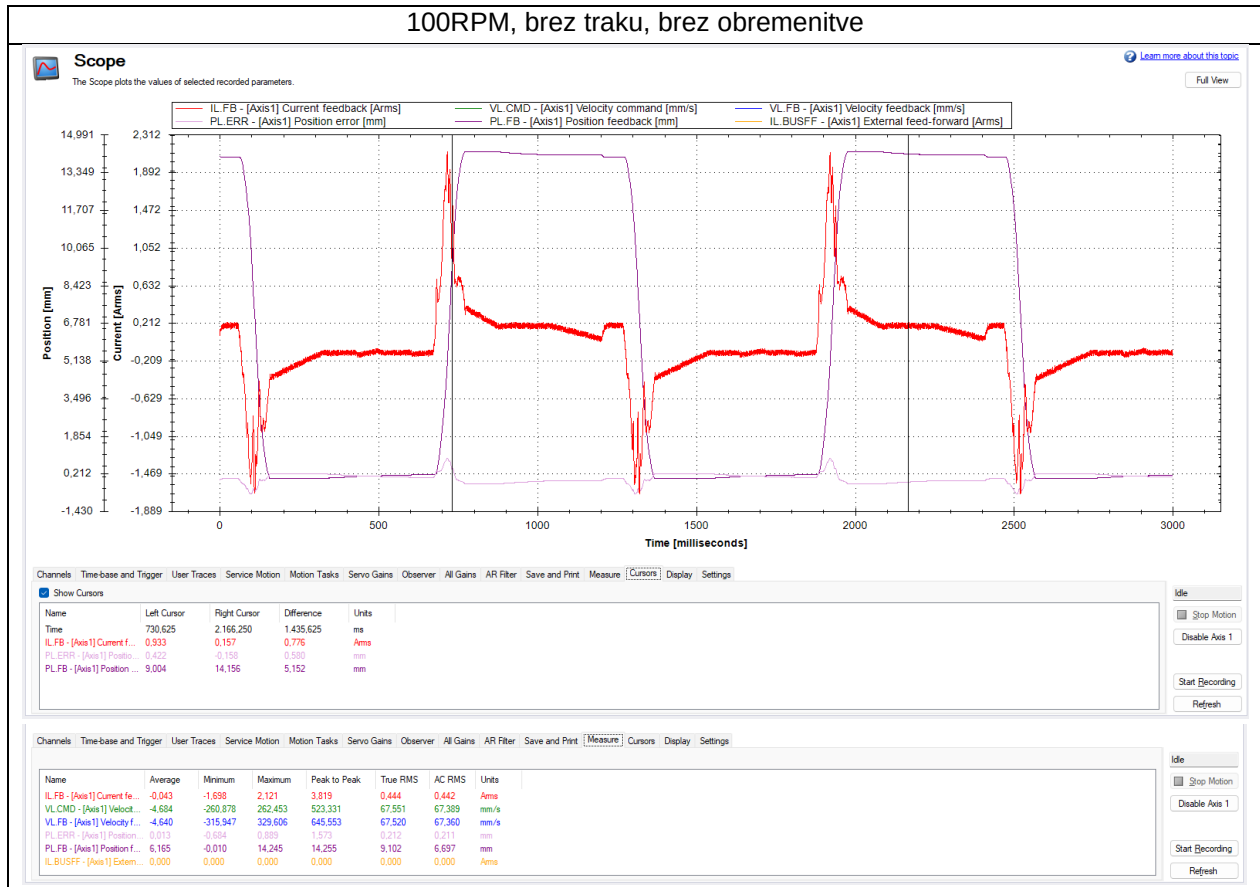


100RPM, s trakom, brez obremenitve

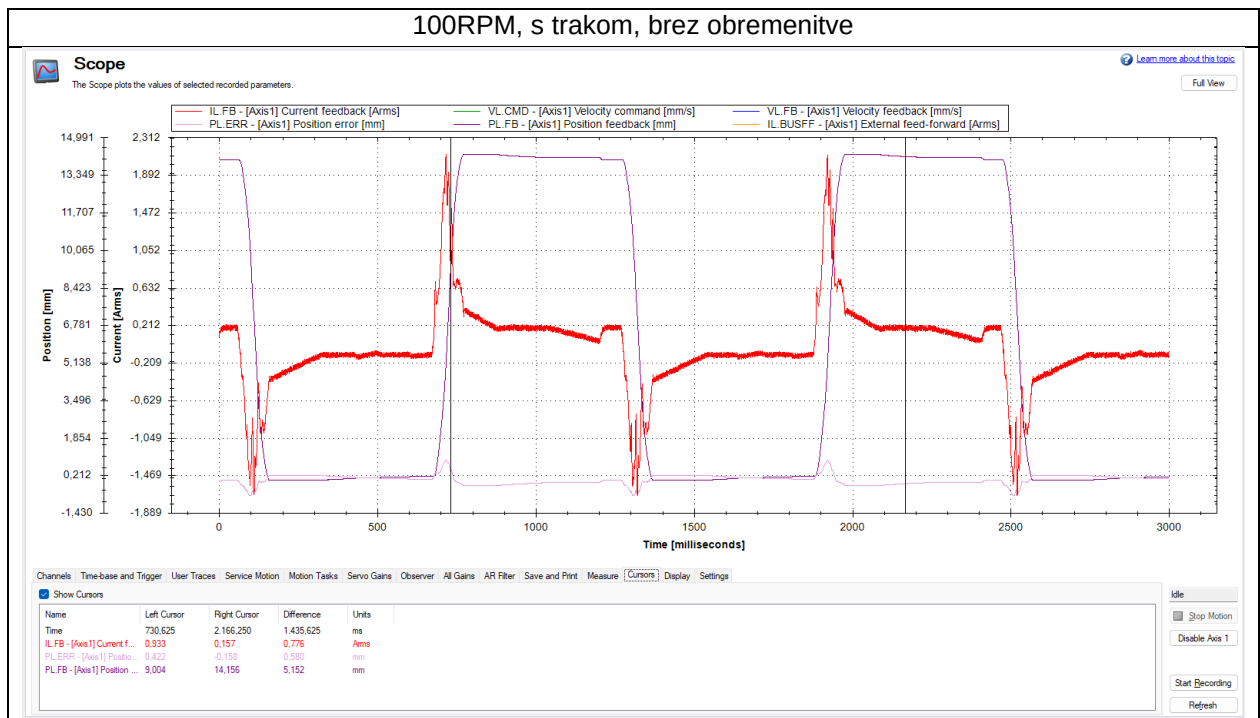




150RPM, s trakom, brez obremenitve

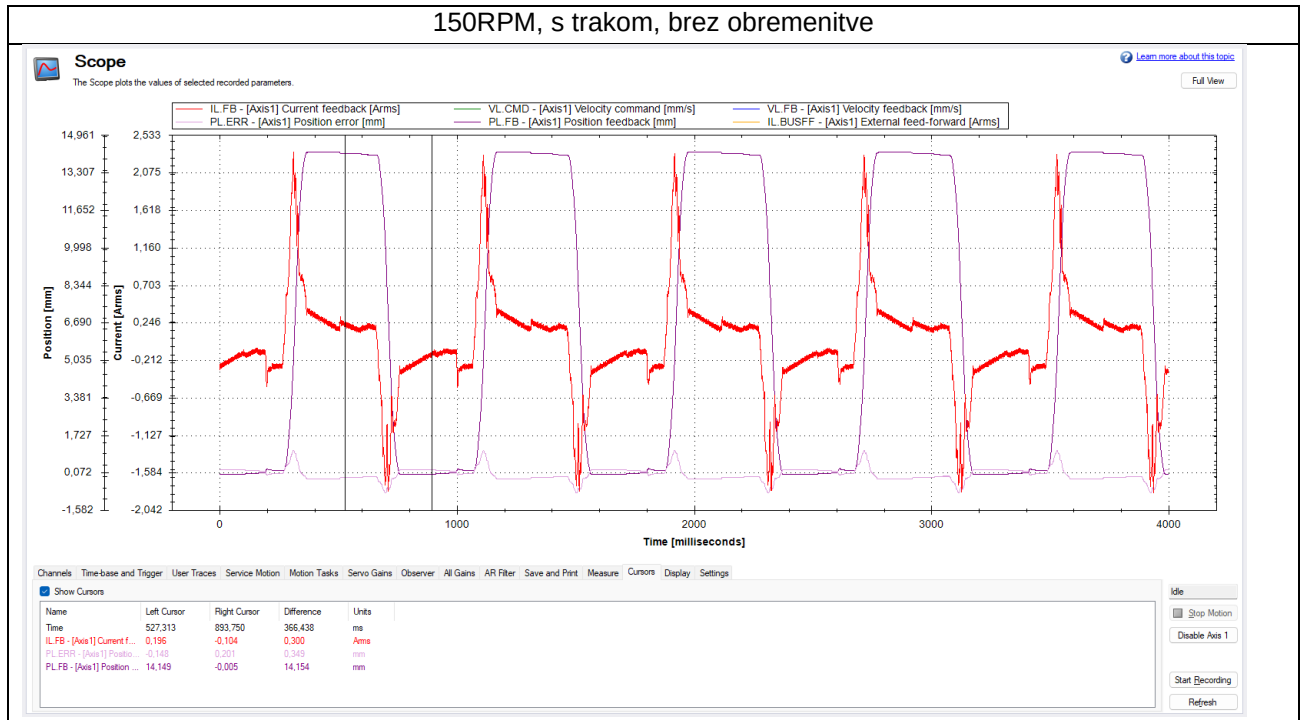


100RPM, brez traku, brez obremenitve

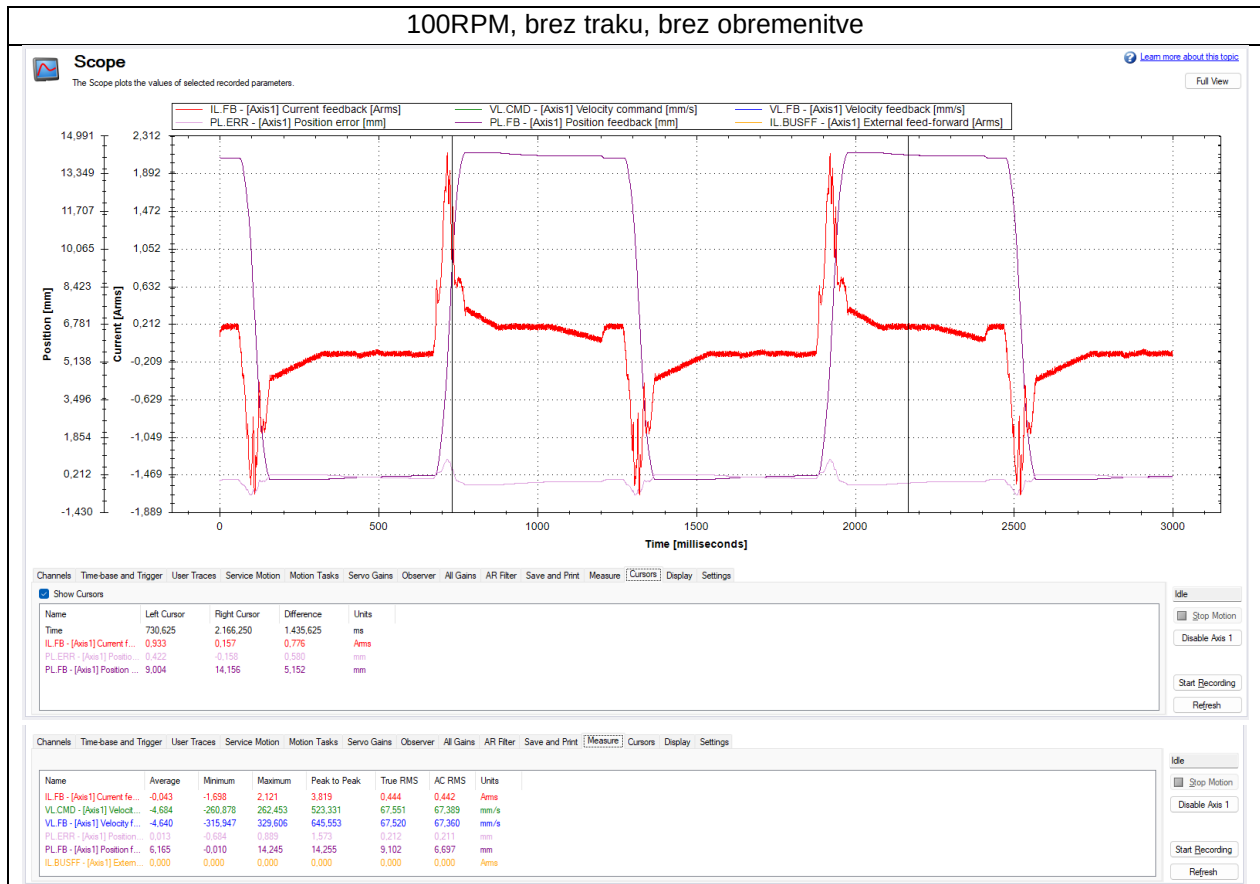






150RPM, brez traku, brez obremenitve

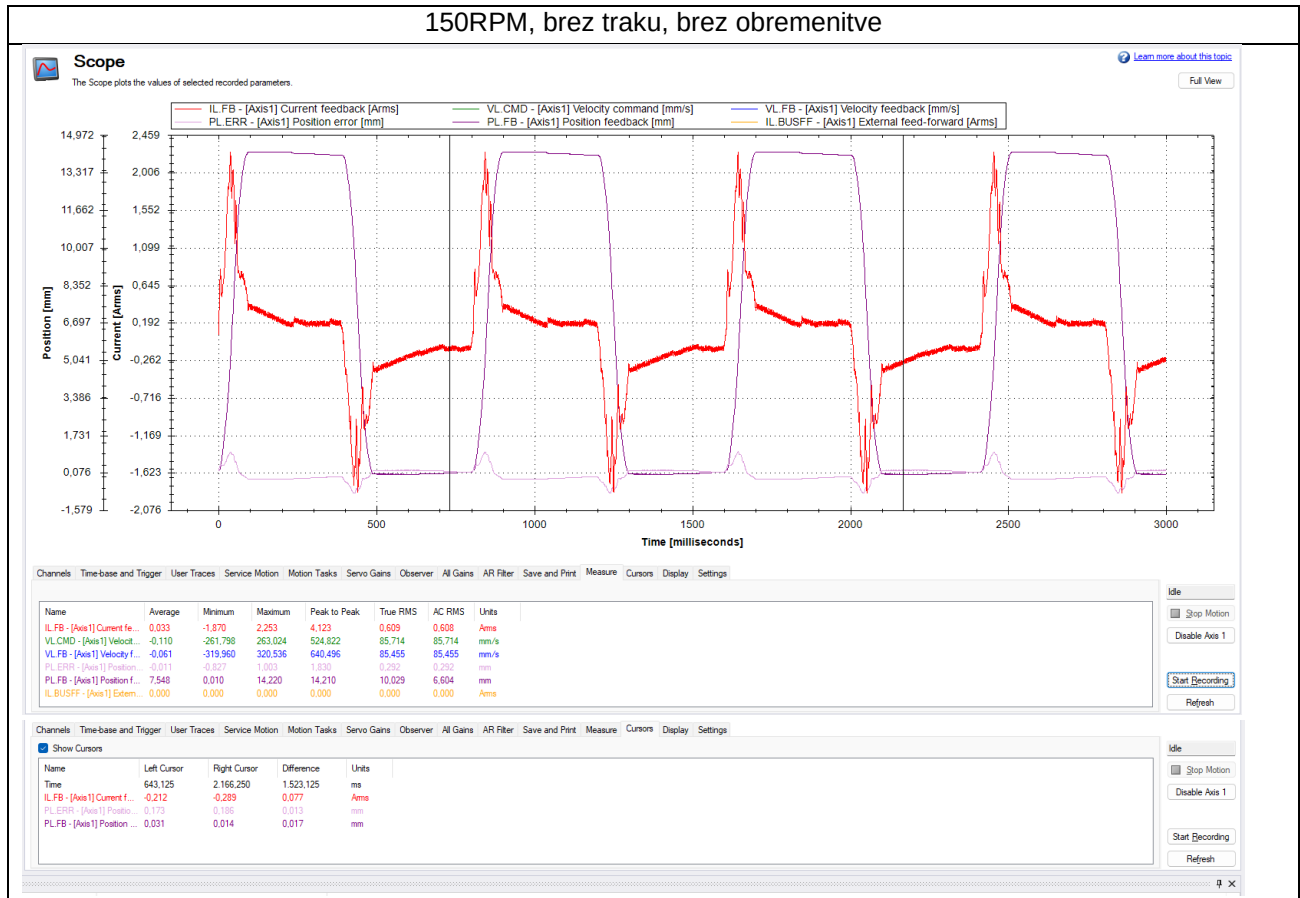

150RPM, s trakom, brez obremenitve

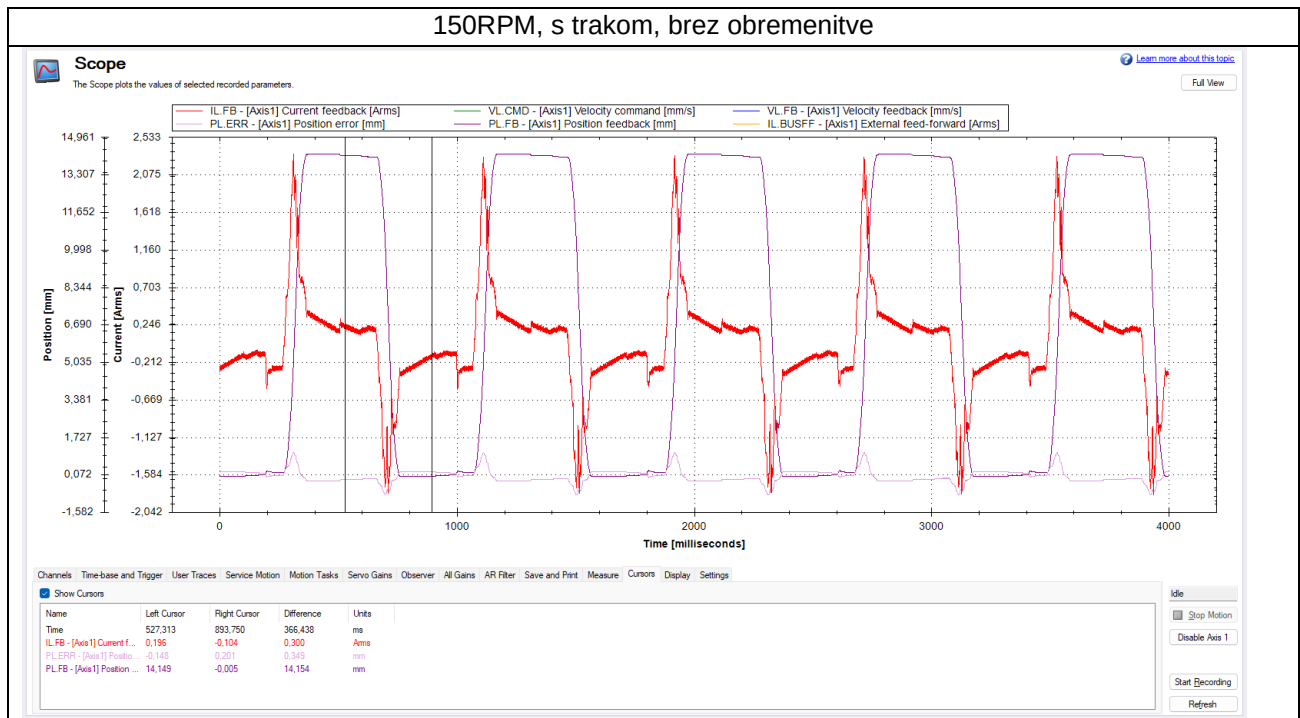


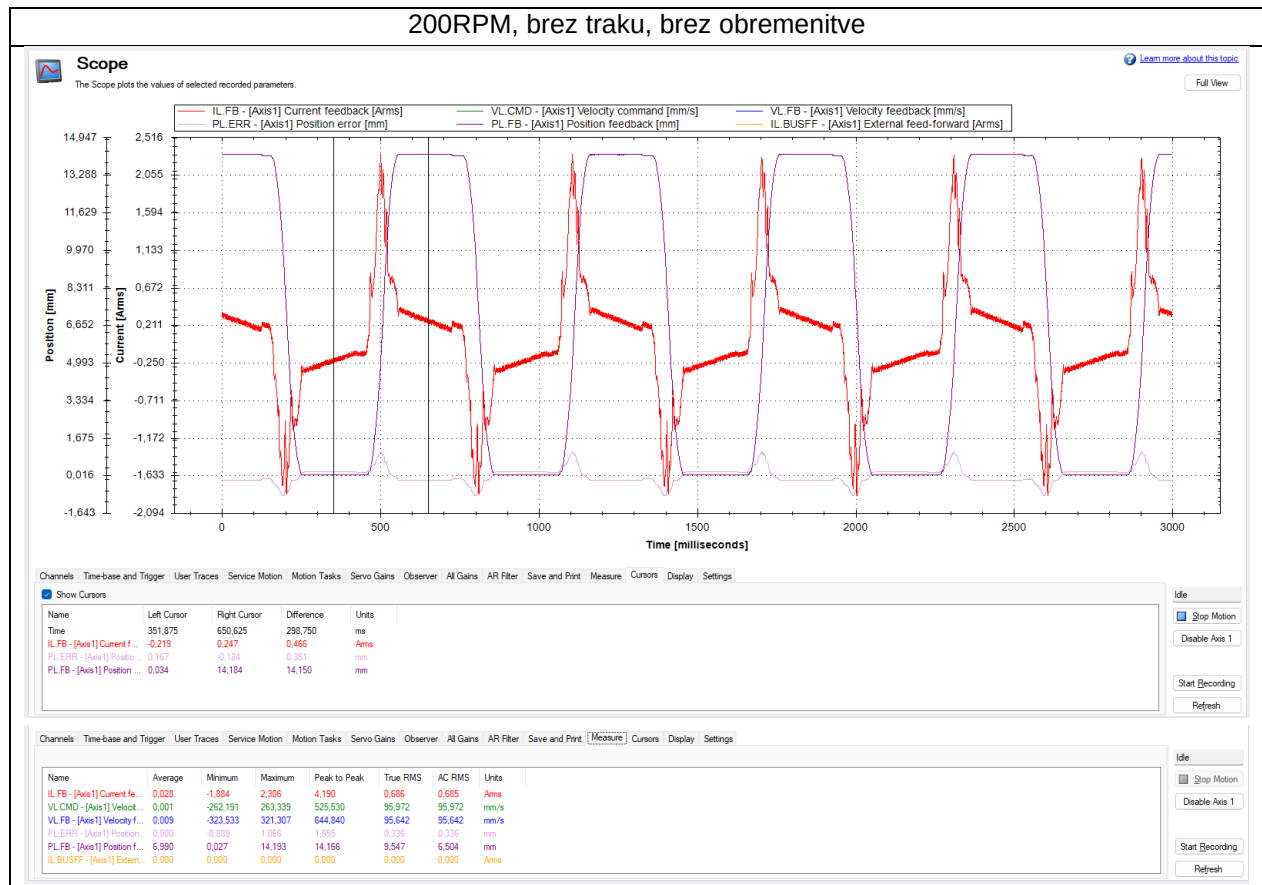

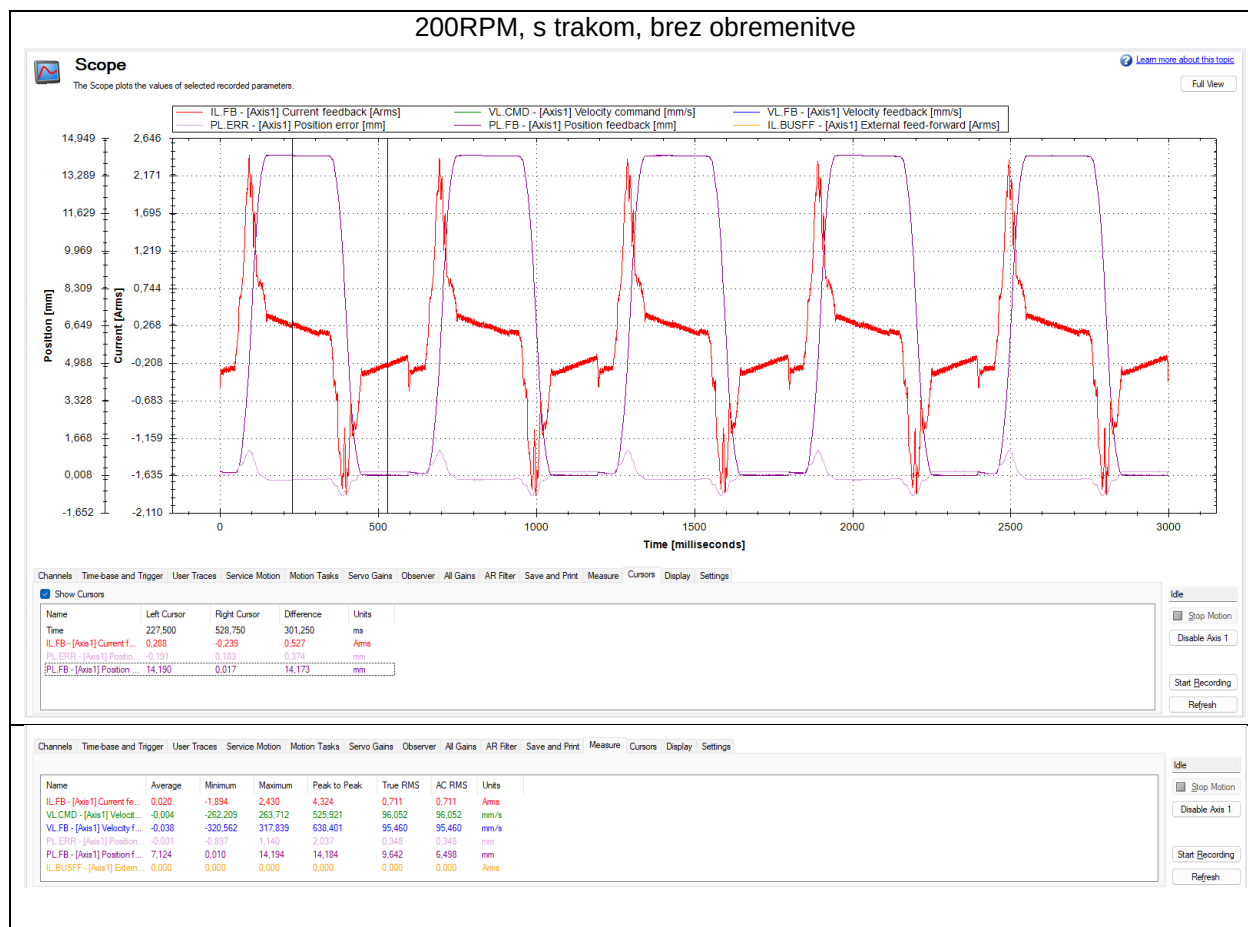





200RPM, 25N obremenitve, brez traku

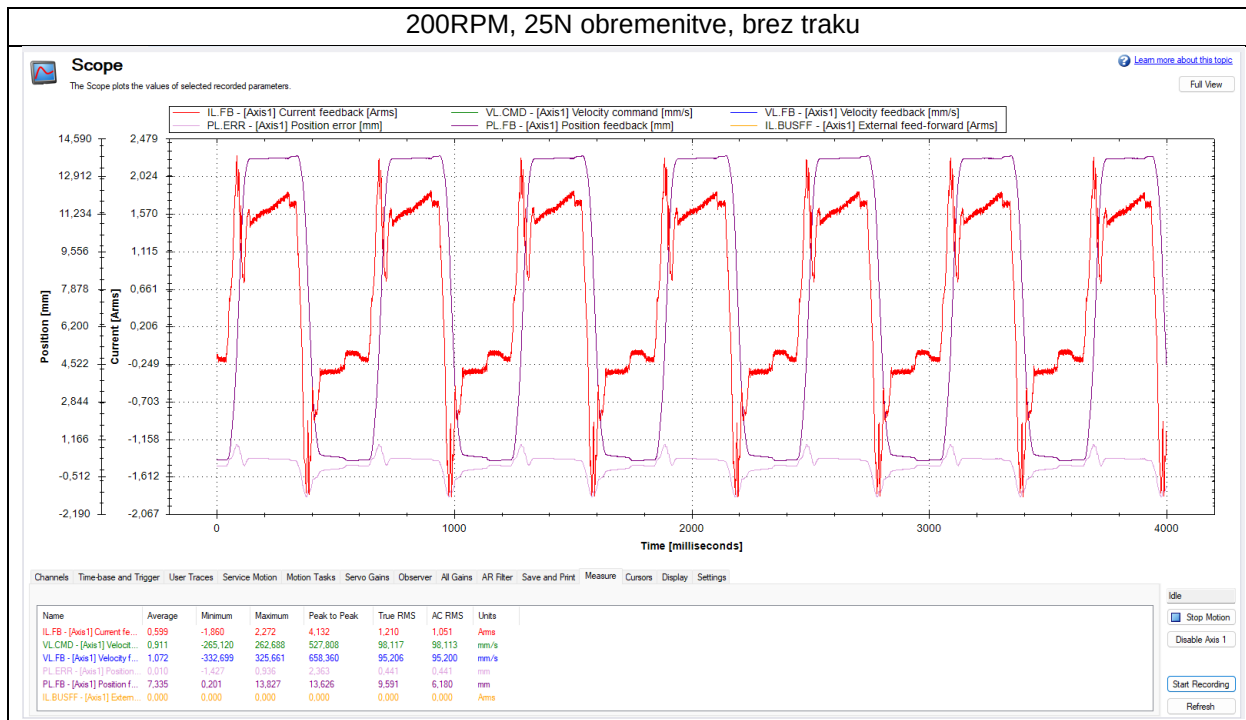




250RPM, brez traku, brez obremenitve

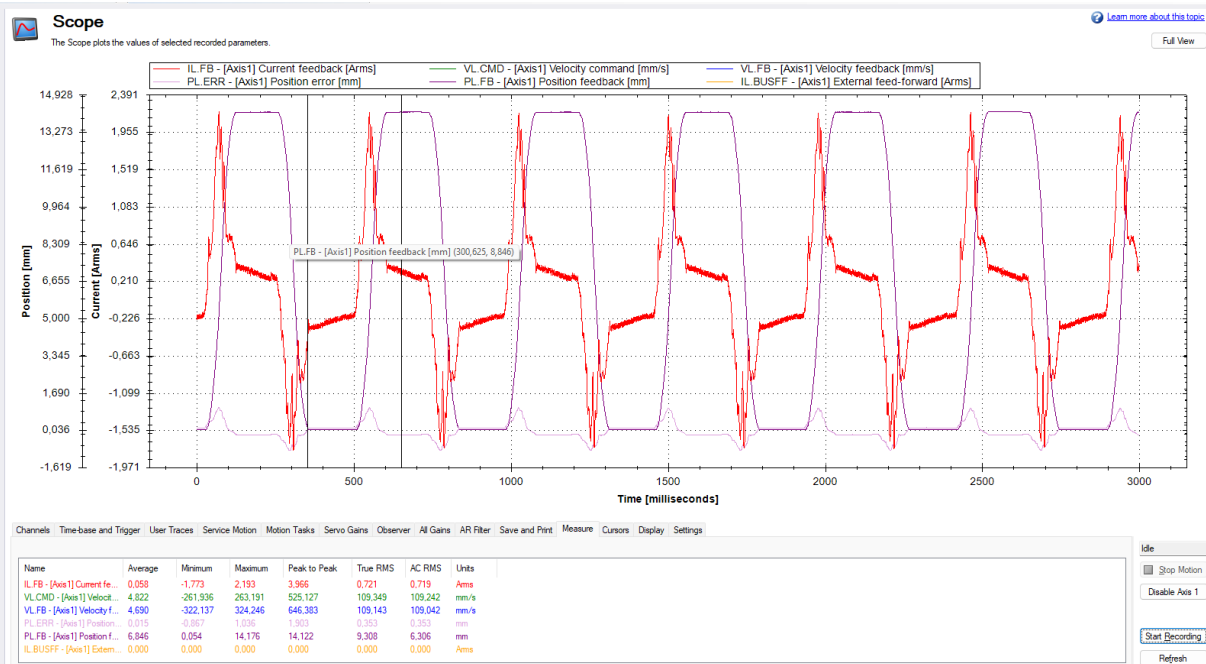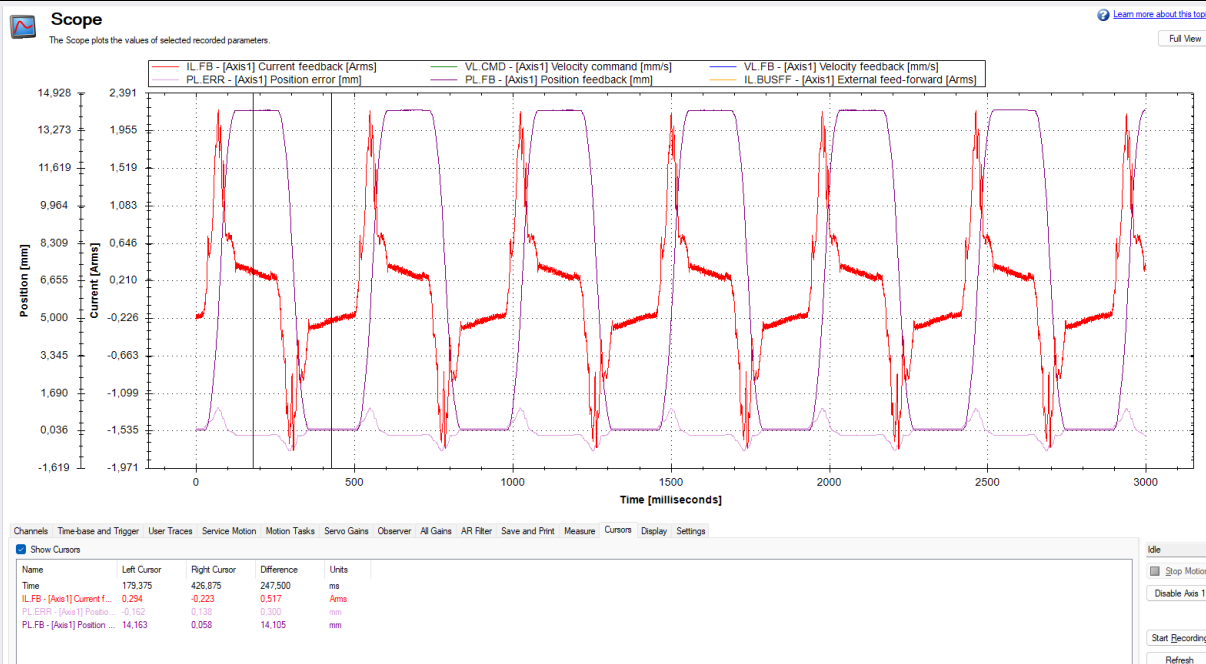



250RPM, s trakom, brez obremenitve

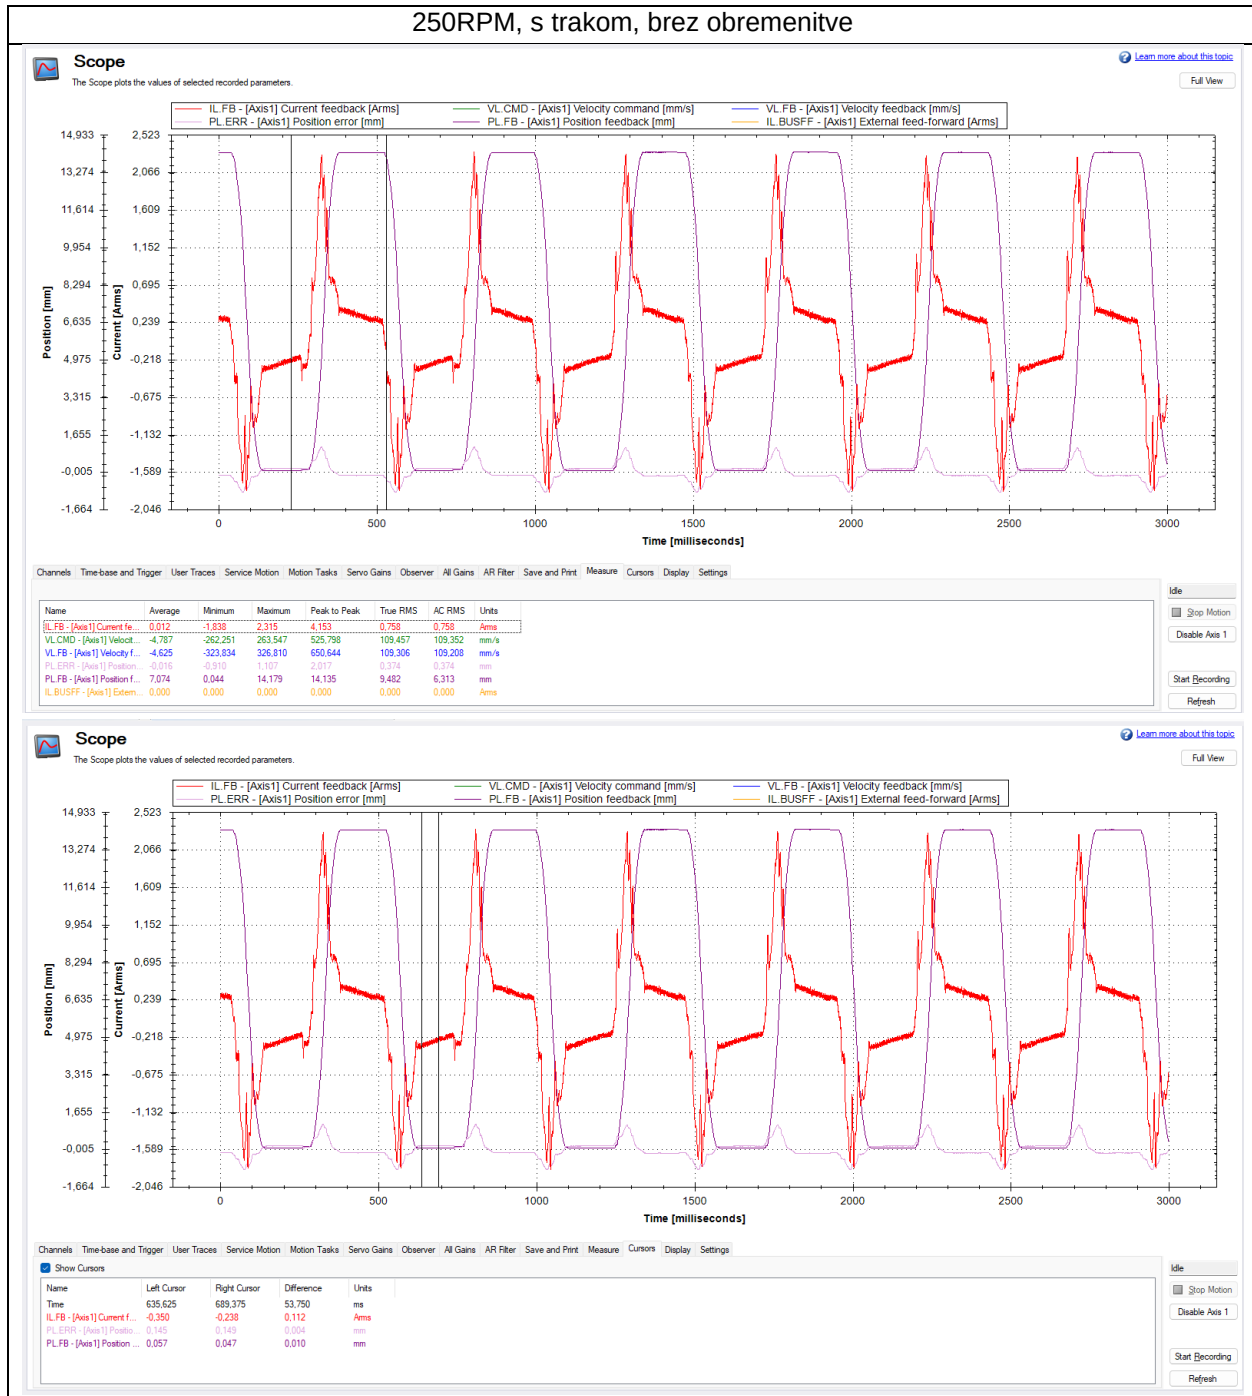

Aktuator obremenjen – 25 N, testiranje pri 100, 150, 200 RPM

- Max temp. okolice – 24°C
- Max temp. navitja – 45°C (I_{rms} = 1.2A)
- Max temp. ohišja – 29°C

Temp. razlika (cca. 10°C)





Aktuator neobremenjen – 0 N, 100RPM, 200RPM, 300RPM

- Odziv temperature ohišja aktuatorja



Aktuator neobremenjen (0 N) , testiranje pri 100, 150, 200 RPM, brez traku

- Max temp. okolice – 26°C
- Max temp. navitja – 30.3°C (Irms = 0.55A)
- Max temp. ohišja – 26°C

Temp. razlika (cca. 4°)

