



— **CONSTANT · MID-POWER · FACTORY / FIELD INSTALL**

## EM20-HMB/135AC

### Tubular AC-Output Emergency LED Driver

20W AC-output emergency LED driver designed for tubular RCH lamp fixtures. 120 VAC input drives 135 VAC LED tubes at full power for 90 minutes during outage. Field-installable in damp locations.

#### KEY FEATURES

- Universal 120 VAC input — one driver, every building voltage
- Operating range 41°F to 122°F
- Constant brightness for 90 min — no dimming as battery drains
- Self-protecting battery — overcharge / over-discharge / short-circuit
- Test switch with red LED status indicator
- UL 924 listed for code-compliant emergency egress
- 5-year limited warranty on driver and battery
- CSA C22.2 No.141 + CEC Title 20 compliant

#### PERFORMANCE

|                          |             |
|--------------------------|-------------|
| Emergency Output Power   | 20 W        |
| Emergency Runtime        | 90 min      |
| Output Type              | AC constant |
| Recharge Time            | 24 hours    |
| Battery Type             | LiFePO4     |
| Battery Charging Current | 0–250 mA    |

#### CONSTRUCTION

|                       |                 |
|-----------------------|-----------------|
| Max. Application      | 20 W            |
| Operating Temperature | 41°F to 122°F   |
| Storage Temperature   | 158°F max       |
| Location Rating       | Dry, damp       |
| Battery Cycles        | 500 full cycles |
| Warranty              | 5-year limited  |

#### ELECTRICAL

|                 |            |
|-----------------|------------|
| Input Voltage   | 120 VAC    |
| Input Frequency | 50 / 60 Hz |
| Input Current   | 100 mA max |
| Input Power     | 5.0 W max  |
| Output Voltage  | 135 VAC    |
| Output Power    | 20 W max   |

#### COMPLIANCE

|                    |                                       |
|--------------------|---------------------------------------|
| Safety Listings    | UL 924 · CSA C22.2 No.141             |
| Energy Compliance  | CEC Title 20                          |
| Installation Li... | UL listed for factory & field install |
| Compatibility      | tubular RCH series                    |

#### INSTALLATION

|               |                                  |
|---------------|----------------------------------|
| Mounting Type | Surface mount                    |
| Test Switch   | Test switch with indicator light |
| Wire Type     | UL 2464, 24 AWG, 300 V, 80°C     |
| Wire Length   | 550 mm (21.65")                  |
| Installation  | Factory or field                 |
| Power Factor  | >0.50                            |

#### COMPATIBILITY · CONSTANT APPLICATION QUICK GUIDE

**tubular RCH** See full Application Quick Guide for sensor & controller pairings.

#### ORDERING INFORMATION

**EM20-HMB/135AC** Standard 20 W driver

**20W**  
OUTPUT POWER

**90 min**  
EGRESS RUNTIME

**120 VAC**  
INPUT

**135 VAC**  
OUTPUT

**tubular RCH**  
COMPATIBLE

**UL 924**  
LISTED




— CONST **A** NT · MID-POWER · FACTORY/FIELD INSTALL

# EM20-HMB/135AC

Page 2 of 2 · Dimensions, Wiring, and Operation Notes


## — DIMENSIONS

### DRIVER ENCLOSURE



L 3.53" (90) · W 2.27" (58) · H 0.85" (22) · MtgCtr 3.23" (82) · 4×4.5 mtg holes


### BATTERY CASE



L 3.45" (88) · W 2.27" (58) · H 0.85" (22) · MtgCtr 3.23" (82) · 4×4.5 mtg holes

*All dimensions are inches (millimeters) unless otherwise indicated.*

## — WIRING DIAGRAM

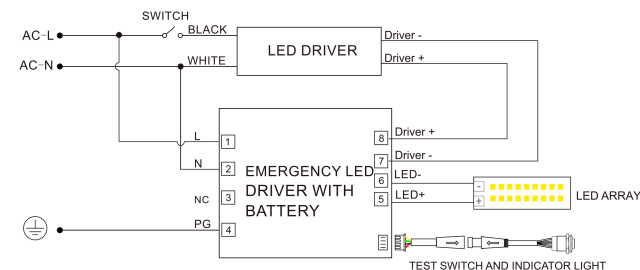

## OPERATION

### AC Operation:

AC power present · the AC LED driver supplies normal power; emergency driver charges in standby. Red LED indicator on = charging.

### Emergency Operation:

On AC failure the emergency driver auto-detects the outage and powers the LED array for ·90 min. Red LED off during egress. AC restoration resumes charging.

## — INSTALL REQUIREMENT

The AC LED driver **MUST** be on the same branch circuit as the emergency LED driver. An unswitched hot lead must connect to the emergency driver. Do not mate the battery connector until all other wiring is complete and AC power is on.

**20W**  
OUTPUT POWER

**90 min**  
EGRESS RUNTIME

**120 VAC**  
INPUT

**135 VAC**  
OUTPUT

**tubulRCH**  
COMPATIBLE

**UL 924**  
LISTED