


lampar^{ARCH} PRO

LV3P | Eureka-II

Product Data Sheet

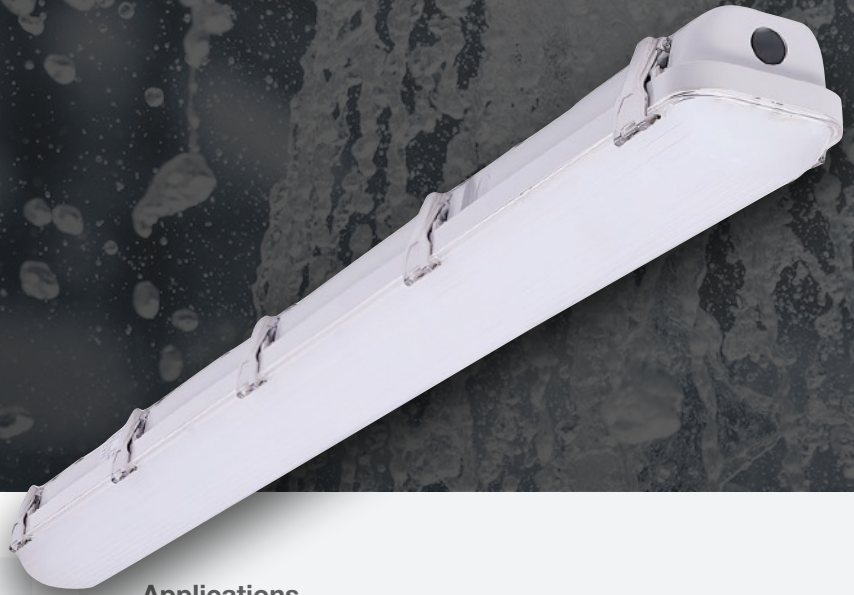

COMMERCIAL-GRADE

Washdown Vapor Tight

2FT | 4FT | 8FT



&



Product Overview

The lampar^{ARCH} LV3P Eureka-series washdown vapor tight is engineered for 2FT, 4FT, and 8FT applications with field-adjustable WATTselect and CCTselect.

Manufactured with longevity and versatility in mind, the Eureka is the washdown you rely on for complete protection from dust, oil, water jets or anything the elements throw at it.

It is NEMA 4X rated, UL 94-5VA classified for flammability control, and IP66 rated for a complete suite of protection.

Product Warranty*



7-Year Warranty



75,000 Hrs

* Standard warranty. Extended warranty available.

Applications



Washdown



Manufacturing



Gymnasium



Agricultural

Main Features

- Field-adjustable (3-WATTselect for 2FT & 4FT, 4-WATTselect for 8FT, & 3-CCTselect on all)
- UL listed for wet locations
- IP66 ingress protection rating for dust and water
- Diffused polycarbonate lens for low-glare output
- Available with optional sensors and EM drivers
- Eco-friendly contractor packaging reduces packaging waste
- Integrated design comes equipped w/ stainless steel latches for quick access to fixture cavities
- V-hook brackets comes standard for suspension mount
- Impact-resistant polycarbonate with stainless steel door latches
- 70% lumen maintenance at >100,000 hours
- Suitable for use in -40°F to 104°F



High Bay Version
Up to 30,000lm

Highlights

Features		Description
3 or 4-WATTselect		Wattage selectable: 3-way dip-switch
3-CCTselect		CCT selectable: 3-way dip-switch
blueARCH™ Controls		SiG-qualified Bluetooth Mesh lighting control solution. Technology by Silvair.
High Performance		Up to 400W, replacing up to 2,000W MH
Standard Extended Warranty		Up to 7-Year, 75,000 Hrs

Model Specifications

Model	Length	WATTselect (W)	Lumen (lm)	LPW (lm/W)	Voltage (V)	CCTselect
LV3P2-3E20-S3P	2FT	15W 17W 20W	3,000lm Max	130lm/W Max	120-277V	3500K / 4000K / 5000K /
LV3P4-3E40-3SP	4FT	20W 30W 40W	4,850lm Max	130lm/W Max		
LV3P4-3E46-3SP		20W 30W 46W	6,000lm Max	130lm/W Max		
LV3P4-3E135-S3P	4FT	100W 125W 135W	20,000lm Max	156lm/W Max		
LV3P4-3E250-S3P		150W 200W 250W	39,000lm Max	156lm/W Max		
LV3P8-3E80-S3P	8FT	60W 70W 80W	10,000lm Max	130lm/W Max		

Project Details

Project Name:

Fixture Schedule:

Project Number:



Notes:

Key Specifications

- **Dimming:** 0-10V
- **Input Voltage:** 120-277V
- **Power Factor (PF):** >0.9 Non-Flicker
- **DLC:** Available in Standard and Premium
- **Total Harmonic Distortion (THD):** <15%
- **IP:** IP66 Ingress Protection for Dust and Water
- **Dimming Status:** Continuous Dimming <10%
- **Color Rendering Index (CRI):** >80
- **Housing:** Impact-Resistant Polycarbonate w/ Stainless Steel Door Latches

Certifications




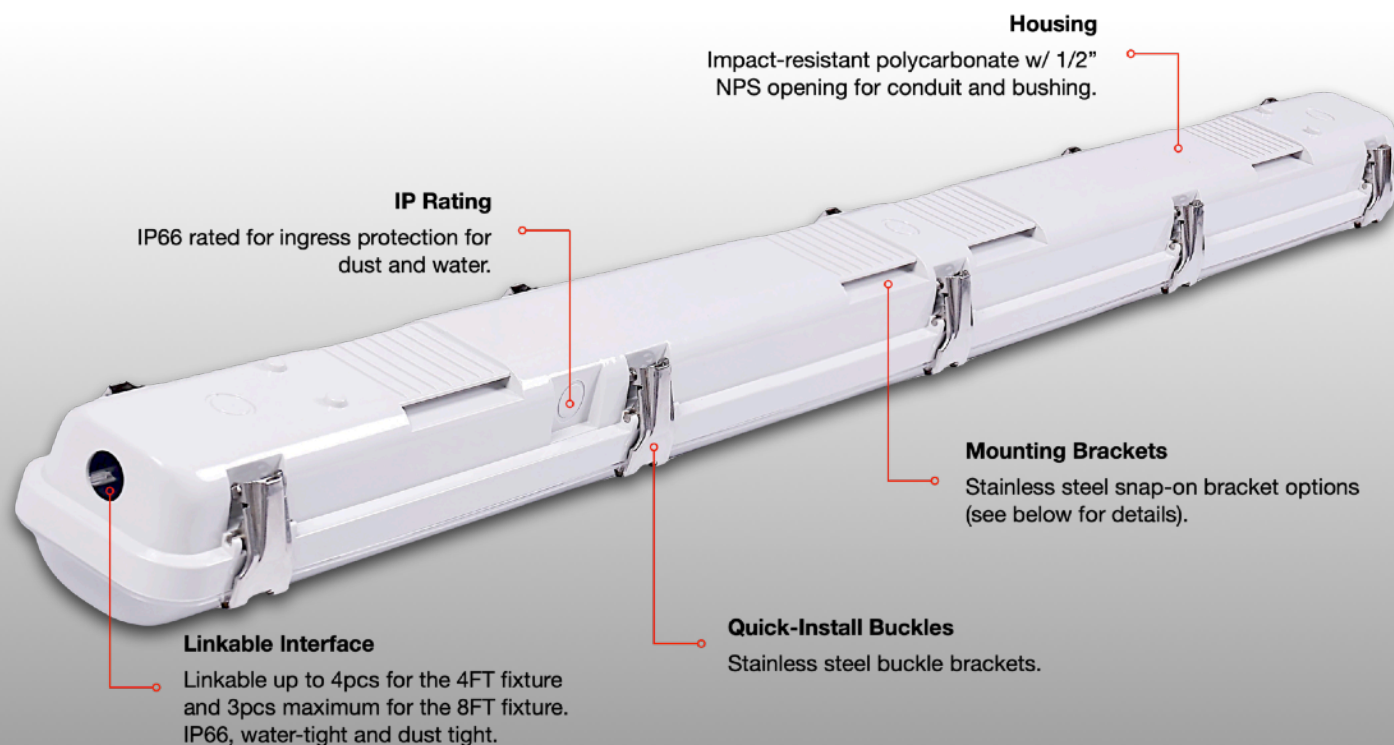

Surface Mount (Standard)



Tamper-Proof Mount



J-Box Mount



Angle Mounts



V-Hook Mount

Ordering Guide

Model Series	Length (FT)	WATTselect (W)	Performance Code	CCTselect (K)	DLC Code
LV3P LED Vapor Tight	2 2FT	-3 3-WATT	E Efficiency	-S3 3-CCT: 3500K 4000K 5000K	P Premium
	4 4FT	-3 3-WATT			
	8 8FT	-4 4-WATT			

Optional Accessories

(1) EM Driver	(2) Sensors
/EM08 EM08-CMB/48 /EM20 EM20-CMB/260	/BLS MSM-HTI/001/BLS

Ordering number example:

Choose your model specifications:

LV3P4-3E40-S3P/MSM/EM08									
-------------------------	--	--	--	--	--	--	--	--	--

Please place dashes (-) in correct order.

Model Series Length Watt Performance CCT DLC (1) EM (2) Sensor (3) Bracket

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

www.archipelagolighting.com

+1 (866) 912-3220



Sizing & Measurements

Dimension (FT)	Length (in)	Width (in)	Depth (in)	Weight (lb)
2FT	25.59	4.17	3.27	
4FT	46.65	4.17	3.27	
	50.12	10.24	3.27	
8FT	92.91	4.17	3.27	

DLC Model Guide

Product ID	Model No.	DLC	Controls	Lumen	Efficacy	CCT	THD	PF
S-R3ZJ0R	LV3P2-3E20-S3P	Standard	Yes	2494	132 lm/W	3500K — 5000K	15%	0.9
S-ZMBNQF	LV3P4-3E40-S3P	Standard	Yes	4816	130 lm/W	3500K — 5000K	15%	0.9
S-V73P6B	LV3P8-3E80-S3P	Standard	Yes	10739	130 lm/W	3500K — 5000K	15%	0.9

[Additional rebate information \(link\)](#)

Compatible Accessories

EM Drivers			Sensors		
					
EM08-CMB/48			MSM-HTI/001/BLS		
✓			✓		
Mounting Hardwares					
					
Surface Mount (Standard)	Tamper-Proof Mount	J-Box Mount	Angle Mounts	V-Hook Mount	V-Bracket

Archipelago Lighting, Inc.

| **Headquarter:** 4615 State Street, Montclair, CA 91763

| **USA Production:** 9345 Sycamore Canyon Blvd, Riverside, CA 92508

Contact Us

www.archipelagolighting.com

+1 (866) 912-3220