

lampar^{ARCH}

LLSR | select^{ARCH}

Product Data Sheet

COMMERCIAL-GRADE

Linear Strip Retrofit Kits

4FT | 8FT



Product Overview

The LLSR select^{ARCH}-Series is built for 3-way switchable power and 3-way CCT using dip-switches to choose between 9-variations for use in offices, schools, hospitalities and other indoor spaces.

Featuring seamless light distribution with frosted acrylic lens that is superior to competing retrofit panel kit, the LLSR-series is a time-saving and cost-effective alternative to full fixture replacement.

ARCHIPELAGO luminaires and LED components has been tested by independent laboratory in accordance to IESNA LM79 and LM80. LED color temperature is warrantied to shift no more than 180K over the standard warranty period. Furthermore, the range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Product Warranty*



7-Year Warranty



75,000 Hrs

* Standard warranty. Extended warranty available.

Applications



Office Space



School




Hospitals



Commercial Buildings

Main Features

- All-in-One Lighting Solution for Linear Strip Retrofit Kit
- Industry's Fastest Strip Retrofit Kit Installation in Minutes
- Steel Housing and Equipped w/ Heat Resistant Frosted Lens
- Universal Fit to Standard 4.25"/5.25" T8/T12 Fluorescent Strips
- Traditional Design is Suitable for Small Space Such as Stairwell
- Selectable Wattage and CCT Through Driver-Based Dip-Switches
- Easy Installation w/ Lay-In Ready and Built-In Seismic Hooks
- Microchip Programmed Light-Engine for Consistent CCT
- High-Density LED Chips for Uniform Light Output
- 7-Year, 75,000Hr Warranty
- UL Damp Location Listed
- DLC Standard Listed

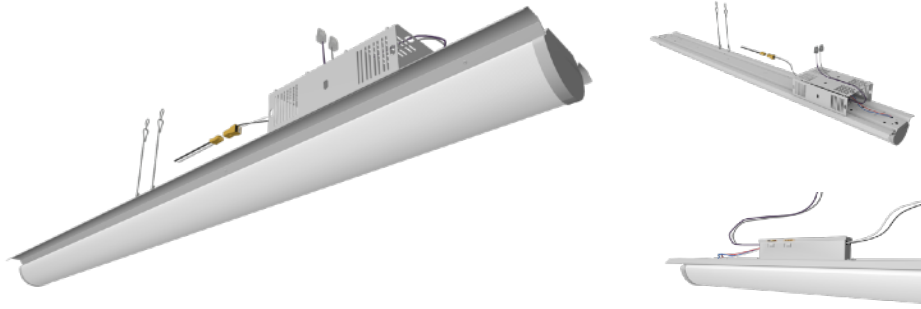

Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

Model Specifications

Model	Length (FT)	WATTselect (W)	Lumens (LM)	Voltage (V)	CCTselect
LLSRxx-4	4FT	18W / 25W / 30W /	2,500LM / 3,375LM / 3,960LM /	120-277V	3500K / 4000K / 5000K /
		35W / 40W / 45W /	4,830LM / 5,400LM / 5,940LM /		
LLSR444	4FT	44W	5,720LM /		
LLSRxx-8	8FT	38W / 46W / 54W /	5,240LM / 6,210LM / 7,125LM /		
		65W / 75W / 90W /	9,000LM / 10,125LM / 12,000LM /		
LLSR888	8FT	88W	11,440LM /		

Key Specifications

- LED Chip: Seoul 3528, LM80, IP-Protected
- Lightweight Frame: 6063 Aluminum
- Operating Temp: -4°F — 122°F
- IP: IP40 Indoor Damp Location
- Input Voltage: 120-277V
- PF: >0.9 Non-Flicker
- Efficacy: 130LM/W
- Dimming: 0-10V
- THD: <15%
- CRI: >80

Certifications




Ordering number example:

LLSRxx-4-PS3-IFS-EM08

Choose your model specifications:

LLSR	xx			S3		
Model Series	Series Code	Length	WATTselect & CCTselect	Sensor	EM	

Please place dashes (-) in correct order.

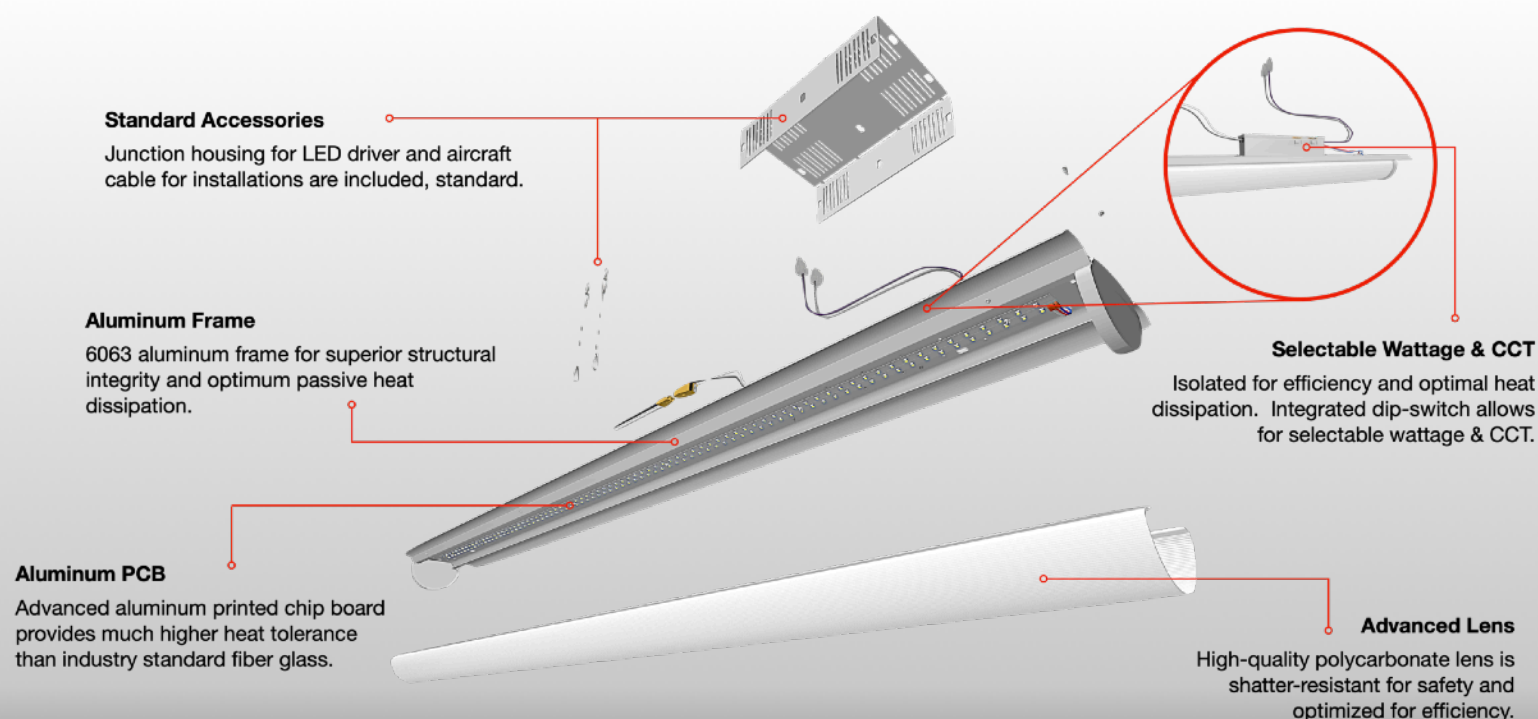


Sizing & Measurements

Model Series	Width (in)	Length (in)	Depth (in)	Weight (lb)	Dimensions
LLSRxx-4 LLSR444	5.76	48.00	2.40	5.40	
LLSRxx-8 LLSR888	5.76	96.3	2.40	9.26	


DLC Model Guide

Product ID	Model No.	DLC	Watt	Lumen	Efficacy	THD	PF	CCT	CRI	Voltage
PLBPOBZCT6VQ	LLSRxx-4-ES3	Standard	30	3990	130	10	0.9	3500	82	120 - 277Vac
PLJF3BONIW8H	LLSRxx-4-PS3	Standard	45	5850	130	10	0.9	3500	82	120 - 277Vac
PL038C2UK75H	LLSRxx-8-ES3	Standard	54	7182	130	10	0.9	3500	82	120 - 277Vac
PLTIXNPHCFBE	LLSRxx-8-PS3	Standard	90	11700	130	10	0.9	3500	82	120 - 277Vac


Upgrade, Easily

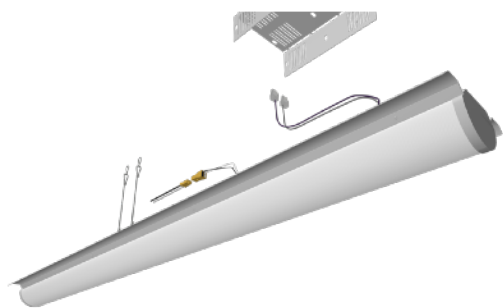

Connect appropriate wirings

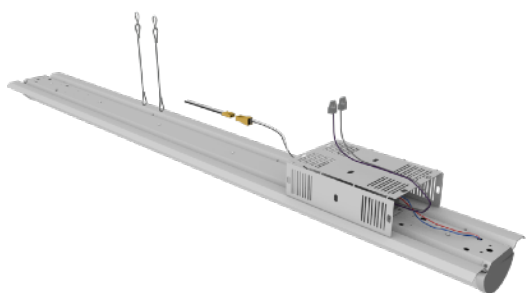


Install junction box

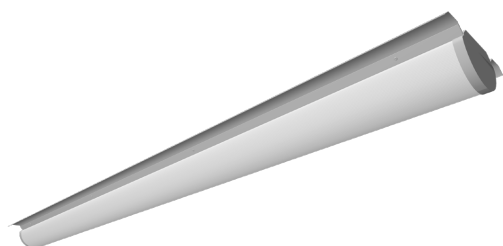

Turn ON the fixture

Photometric

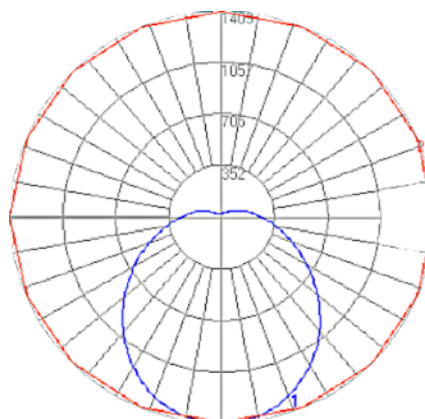

Compatible Accessories

EM Drivers



EM08-CMB/48EDC

LLSR | selectARCH

✓

Sensors



MSM-SDI/3/BLS

LLSR | selectARCH

✓

Compatible Controllers

RM-SD/100S

