


RE 40 Ø40 mm, Precious Metal Brushes, 25 Watt

RE

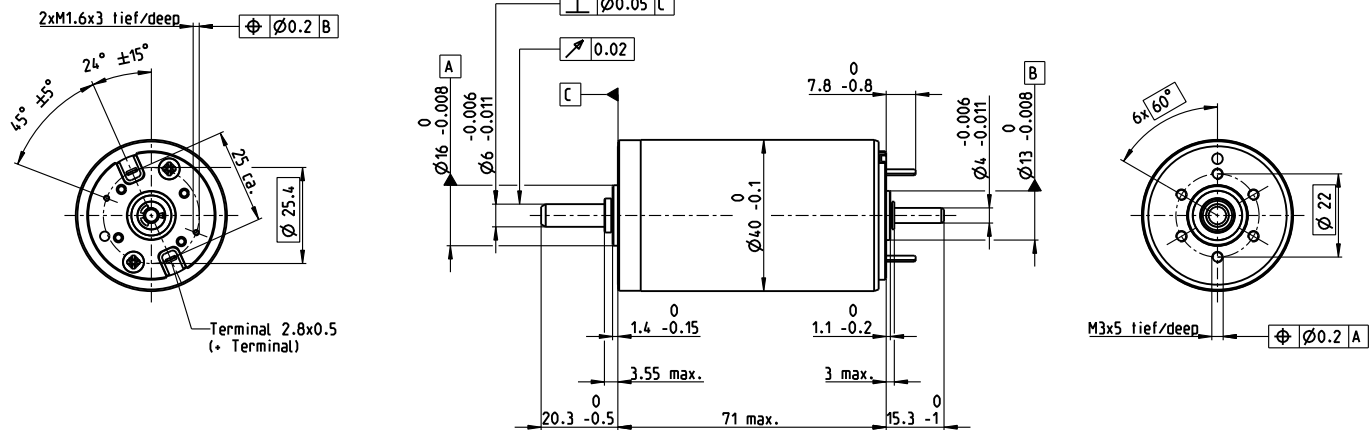

M 1:2

- Stock program
- Standard program
- Special program (on request)

Part Numbers

Motor Data (provisional)

		448588	448589	448590	448591	448592
Values at nominal voltage						
1 Nominal voltage	V	9	18	24	42	48
2 No load speed	rpm	2850	2850	2780	2920	2690
3 No load current	mA	49.7	24.8	18.1	11	8.62
4 Nominal speed	rpm	2560	2580	2470	2640	2400
5 Nominal torque (max. continuous torque)	mNm	87.8	87.8	88.2	87.6	87.6
6 Nominal current (max. continuous current)	A	2.96	1.48	1.09	0.65	0.524
7 Stall torque	mNm	873	956	794	895	818
8 Stall current	A	29	15.9	9.66	6.53	4.81
9 Max. efficiency	%	92	92	92	92	92
Characteristics						
10 Terminal resistance	Ω	0.311	1.14	2.49	6.43	9.97
11 Terminal inductance	mH	0.082	0.33	0.613	1.7	2.62
12 Torque constant	mNm/A	30.2	60.3	82.2	137	170
13 Speed constant	rpm/V	317	158	116	69.7	56.2
14 Speed/torque gradient	rpm/mNm	3.27	2.98	3.51	3.27	3.3
15 Mechanical time constant	ms	4.85	4.29	4.36	4.14	4.13
16 Rotor inertia	gcm ²	142	137	119	121	120

Specifications

Thermal data	
17 Thermal resistance housing-ambient	4.65 K/W
18 Thermal resistance winding-housing	1.93 K/W
19 Thermal time constant winding	41.5 s
20 Thermal time constant motor	809 s
21 Ambient temperature	-20...+85°C
22 Max. winding temperature	+100°C

Mechanical data (ball bearings)	
23 Max. speed	3330 rpm
24 Axial play	0.05 - 0.15 mm
25 Radial play	0.025 mm
26 Max. axial load (dynamic)	5.6 N
27 Max. force for press fits (static) (static, shaft supported)	110 N
28 Max. radial load, 5 mm from flange	1200 N
	28 N


Other specifications	
29 Number of pole pairs	1
30 Number of commutator segments	13
31 Weight of motor	480 g

Values listed in the table are nominal.
Explanation of the figures on page 72.

Option

Preloaded ball bearings

Operating Range

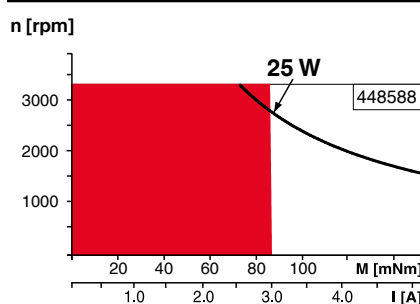

Comments

- **Continuous operation**
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit.
- Short term operation**
The motor may be briefly overloaded (recurring).
- **Assigned power rating**

maxon Modular System

Details on catalog page 34

Recommended Electronics:

Notes	Page 34
ESCON Module 24/2	486
ESCON 36/2 DC	486
ESCON Module 50/5	487
ESCON 50/5	489
EPOS4 Micro 24/5	495
EPOS4 Mod./Comp. 24/1.5	496
EPOS4 Mod./Comp. 50/5	496
EPOS4 Comp. 24/5 3-axes	497
EPOS4 50/5	501
EPOS2 P 24/5	504

Encoder MR
256 - 1024 CPT,
3 channels
Page 464
Encoder HED_5540
500 CPT,
3 channels
Page 471/474