



Product datasheet

Product series: RC series

Imprint Notice:

The final interpretation right of this product specification belongs to Shenzhen CLT Electronics Co., Ltd., without the permission of Shenzhen CLT Electronics Co., Ltd., any individual or organization shall not excerpt, reprint, copy, translate, edit, publish the specification in any form, because the product will continue to upgrade, so the corresponding content of the product is modified without prior notice. This specification is for reference only, and the specific parameters shall be subject to the order configuration.

telephone: 400-6575-168

mailbox: marketing@cltchina.cn

URL: www.cltchina.cn

Change history

Version number	Pages	Revised Content Description	Date of revision	Revision Personnel
V1.0	-	First edition enacted	2024.10.18	黄瑜萍
V1.1	-	The name C2 should be changed to RC	2024.11.07	黄瑜萍
V1.2	-	The standard packaging was changed to a flight case	2024.12.10	黄瑜萍
V1.3	-	Cabinet upgrade	2025.05.28	黄瑜萍

Directory

1.0 Scope of application	4
2.0 Product Description:	4
3.0 Technical parameters	6
4.0 Product interfaces	8
5.0 Product nameplate	9
6.0 Packaging solutions	9
7.0 Precautions for product use	11

1.0 Scope of application

This specification is suitable for RC series indoor 500mm*1000mm size standard box, if there are special requirements, it can be customized according to the actual situation

2.0 Product Description:

2.1 Product Introduction

The RC series is a standardized indoor and outdoor rental product developed for the global professional display market. This model is made of die-cast aluminum material, which has the characteristics of light weight, high precision, ultra-thin and good thermal conductivity. The standardized cabinet can be compatible with a variety of spacing, which can be quickly installed indoors, and the module has a variety of characteristics such as anti-dust accumulation and magnetic fixation. It is widely used in indoor concerts, hotel stages, etc.

2.2 Features

- a) The positioning structure is used around to ensure the flatness of the screen construction. The box size is 500*1000 standard, and the different sizes of the box support mixed up, down, left and right.
- b) The high-efficiency lock design is adopted between the boxes, and the operation can be completed by one person.
- c) The power supply adopts aviation plug design, which is convenient and stable for connection.


- d) Support internal and external arcs, flexible splicing, curved surface, 90° right angle, dislocation splicing and other diversified splicing methods;
- e) The module adopts hard connection, and the signal is safe and reliable.
- f) The power box adopts an integrated quick-lock structure, which can be quickly disassembled and replaced.
- g) Support post-maintenance, easy and fast installation and maintenance
- h) The box is equipped with a rotating corner protection design, which plays a better role in the transportation and construction process.
- i) Support hoisting. Folding back frame, trolley and other rental accessories supporting design.

2.3 Product images



Product diagram

2.4 Product size structure drawing

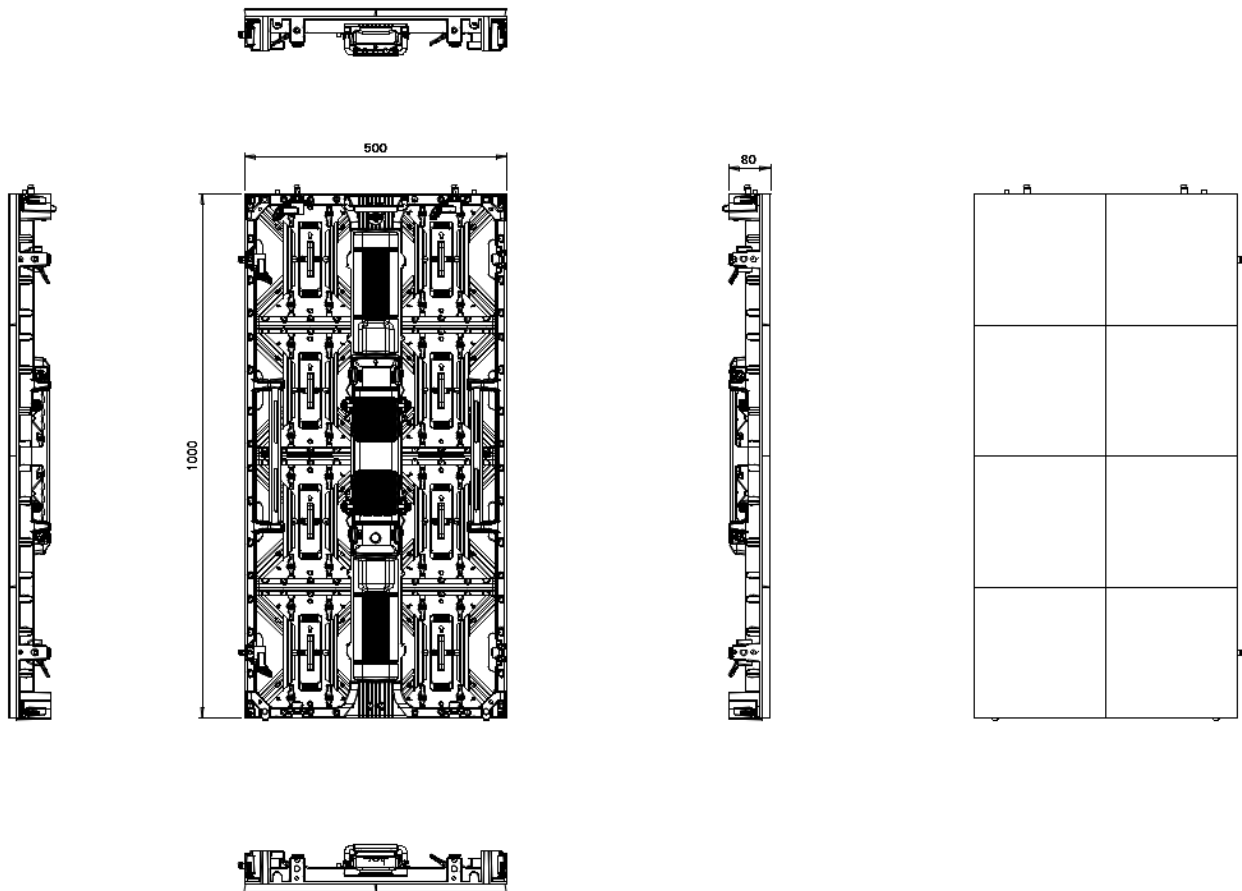

Note: 1. The design and specifications will be upgraded and updated from time to time and will be subject to change without notice.

2. The dimension values (mm) shown in the chart are approximate.

3.0 Technical parameters

3.1 Mechanical parameters

project		parameter			
Module	Pixel pitch (mm)	1.953	2.604	2.976	3.906
	Pixel composition	SMD1515	SMD1515	SMD2020	SMD2020
	Module resolution (dots)	128*128	96*96	84*84	64*64
	Module size (mm)	250*250	250*250	250*250	250*250
Box	Cabinet resolution	256*512	192*384	168*336	128*256

	Pixel density (dots/m ²)	262144	147456	112896	65536
	Cabinet size (mm)	500*1000*79.6			
	Cabinet module composition	2 column x 4 row			
	Maintenance methods	rear maintenance			
	Cabinet material	Die-cast aluminum			
	Cabinet flatness	≤0.15mm			

3.2 Optical parameters

project	parameter
Grayscale (Bit)	14
White balance brightness (nit)	800
contrast	8000: 1
Color gamut	≥100% NTSC
Color coordinates	standard (0.2953, 0.3047), adjustable
Temperature (K)	Standard 8000, 3200~12000 adjustable
Horizontal/Vertical Viewing Angle	160°/140°
Chromaticity uniformity	≤0.005
Brightness uniformity	≥95%
Single-point brightness correction	In the tank
Single-point chromaticity correction	In the tank

3.3 Electrical parameters

project	parameter
Average power consumption per box (W/box).	100
The maximum power consumption of a single box (W/box).	300
Average power consumption per square meter (W/m ²)	157
Maximum power consumption per	463

square meter (W/m ²)	
Module power supply requirements	DC4.5V
Enclosure power supply requirements	AC100~260V/50~60Hz

3.4 System parameters

project	parameter
Frame change frequency (Hz)	50~60
Refresh rate (Hz)	2880~3840
Drive mode	PWM Constant current drive
Optional dual backup	Current-sharing power supply
Installation:	Fixed installation, right-angle installation, internal and external arc installation

3.5 Packaging parameters


project	parameter
Net weight of the module (Kg)	0.62
Net weight of the box (Kg)	11.6 (Modules included)

Note: The above 3.1~3.5 parameters are the test and calculation parameters of the sample, and the parameters are for reference only because the specific batch configuration may be different;


3.6 Environmental requirements

project	parameter
Operating temperature range (°C)	-10~40
Operating humidity range (RH)	10%~65% No condensation
Storage temperature range (°C)	-20~50
Storage humidity range (RH)	10%~65% No condensation
Ingress protection (front/rear).	IP30/IP30

4.0 Product interfaces

legend	type	illustrate
	Power connector	LED display power interface, maximum current 16A
	Signal network port	RJ45 network port to transmit video source signals

5.0 Product nameplate

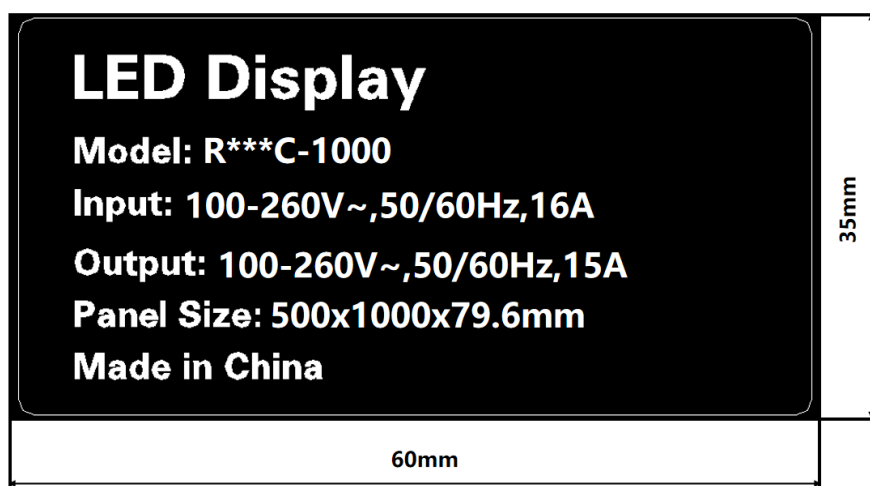


Note: Due to different production batches, the nameplate of this product is optional, if you have special nameplate style or size requirements, please contact us in advance


6.0 Packaging solutions

Unless the customer specifies its packaging information, it will provide customers with standard flight boxes, and the specific transportation method will vary slightly due to different regions and quantities, and the actual packaging method shall prevail. The packaging method and label information are as follows.

6.1 Module packaging solutions

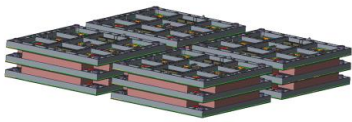

Pearl cotton septum

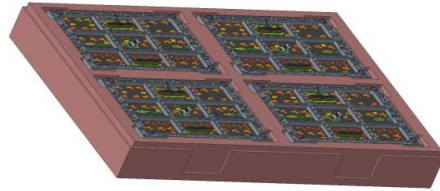



Protected by pearl cotton




Standard box

6.2 Box packaging solutions

Flight case 1 pack of 6 (standard):

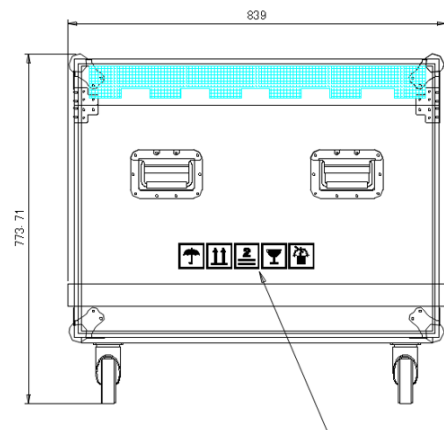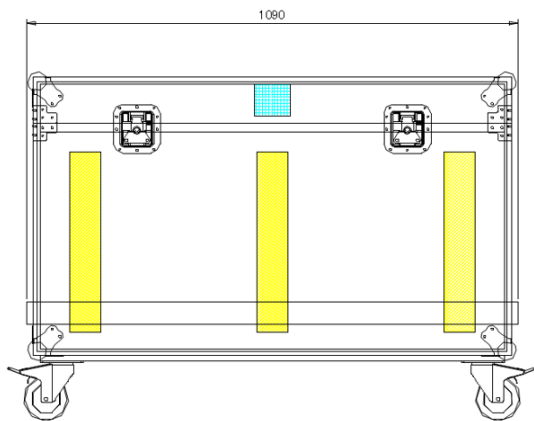

Silk screen printing five-proof logo
Symmetrical on both sides

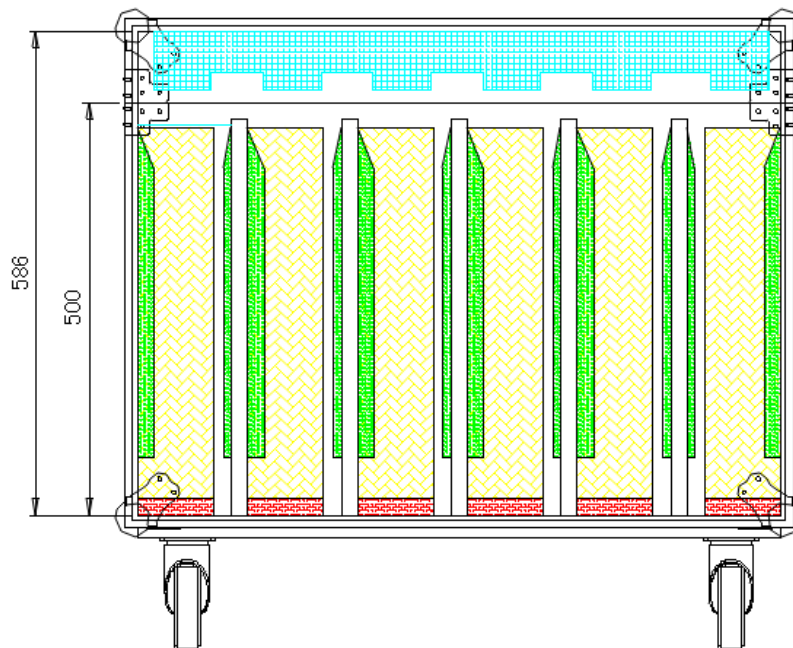

7.0 Precautions for product use

Item	Parameter & description
Operating environment temperature	Ambient temperature: $-10^{\circ}\text{C}\sim 40^{\circ}\text{C}$; Other temperature ranges require the addition of temperature control equipment. The temperature of the lamp surface $\leq 60^{\circ}\text{C}$ during the working process, and the temperature exceeds the standard and the temperature control equipment needs to be added;
Storage environment temperature	Ambient temperature: $-20^{\circ}\text{C}\sim 50^{\circ}\text{C}$; Above 30°C requires cooling treatment; Exceeded -20°C needs to be heated up;
Operating environment humidity	Ambient humidity: $10 \sim 65\% \text{ RH}$, humidity exceeding the standard needs to be dehumidified in the use of the environment before normal use;

Storage environment humidity	Ambient humidity: 10~ 65% RH, humidity more than 80% RH needs to be dehumidified;
Overdue storage treatment	The product has not been stored for more than one month or power out of the box for more than 48 hours after opening the box, and it takes 6 hours of aging before use before normal use. The aging mode is: full brightness setting 10% 1hrs, full brightness setting 30% 1hrs, full brightness setting 60% 2hrs, full brightness setting 80% 1hrs, full brightness setting 100% 1hrs (brightness gradually increasing aging);
dustproof	Ip3X dustproof rating on the back. Should not be exposed to more dust environment, such as more sand and dust outdoors, indoor high dust workshop, etc., need to display the box for special protection;
Corrosive gas resistant	The cabinet should not be exposed to environments where the air contains salt or acid fumes, as this can cause corrosion of electronic components, crystalline leakage, and other issues.
Protection against electromagnetic radiation	The module should not be placed in an environment where electromagnetic radiation and radio frequency radiation exceed the intensity of the electric field by 5V/m interference sources.
Anti-static	Prevent the damage of electrostatics to electronic devices in humid environments and avoid the damage of leakage to the human body.
shockproof	The display should be installed on a robust and reliable

	installation structure without strong vibration;
Stay away from water sources	The box is not waterproofed, and the water conduction can cause the circuit to be short-circuited, resulting in the damage of the circuit components, so it is necessary to stay away from the water source.
personal injury	The angle and height of the module installation should be suitable, and the sharp corners should be packaged to prevent the damage of the strong outer shell to the human body;
Security requirements	It is necessary to ensure the stability of the power supply system, maintain the normal level of frequency, voltage, current harmonics, when a plurality of LED display boxes are spliced, the metal shell should be grounded together with the metal frame installed in the LED display, and the grounding resistance of the overall system of the display should not be greater than 1Ω , and the leakage current should not exceed 5% of the input current. The electrical strength should meet the provisions of SJ/T 1114 1-2017 General Specification 5.7.5 for light-emitting diode (LED) displays;
other	If the product is an indoor installation product, it should be confirmed that the structure of the product is stable and the safety of the surrounding personnel;