1. Description

1.1. Project

Project Name	HAM_TRX
Board Name	STM32F401C-DISCO
Generated with:	STM32CubeMX 4.11.0
Date	12/26/2015

1.2. MCU

|	
MCU Series	STM32F4
MCU Line	STM32F401
MCU name	STM32F401VCTx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration
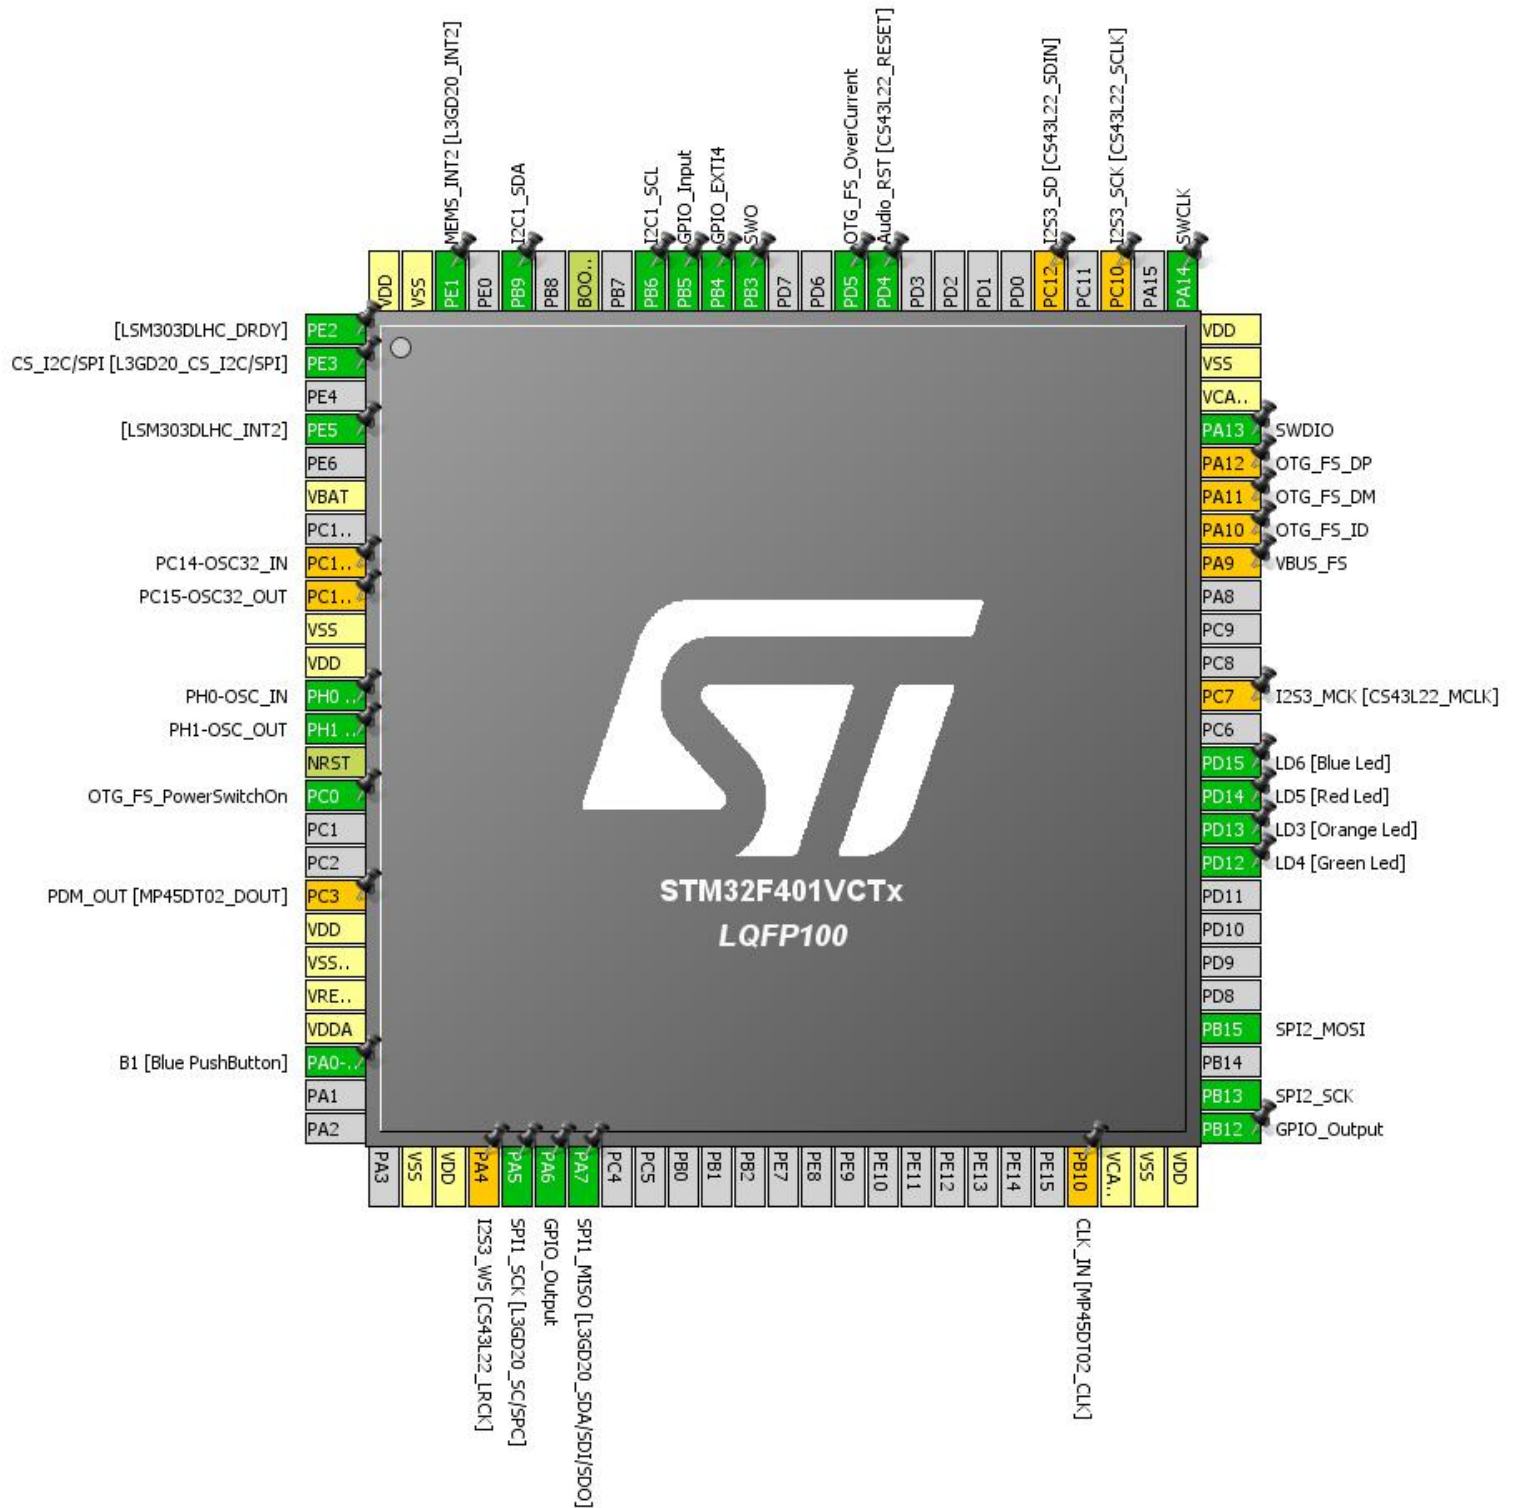
3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2 *	I/O	GPIO_Input	[LSM303DLHC_DRDY]
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
4	PE5	I/O	GPIO_EXTI5	[LSM303DLHC_INT2]
6	VBAT	Power		
8	PC14-OSC32_IN **	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT **	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0 - OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
18	PC3 **	I/O	I2S2_SD	PDM_OUT [MP45DT02_DOUT]
19	VDD	Power		
20	VSSA/VREF-	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	B1 [Blue PushButton]
27	VSS	Power		
28	VDD	Power		
29	PA4 **	I/O	I2S3_WS	I2S3_WS [CS43L22_LRCK]
30	PA5	I/O	SPI1_SCK	SPI1_SCK [L3GD20_SC/SPC]
31	PA6 *	I/O	GPIO_Output	
32	PA7	I/O	SPI1_MOSI	SPI1_MISO [L3GD20_SDA/SDI/SDO]
47	PB10 **	I/O	I2S2_CK	CLK_IN [MP45DT02_CLK]
48	VCAP1	Power		
49	VSS	Power		
50	VDD	Power		
51	PB12 *	I/O	GPIO_Output	
52	PB13	I/O	SPI2_SCK	
54	PB15	I/O	SPI2_MOSI	
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
64	PC7 **	I/O	I2S3_MCK	I2S3_MCK [CS43L22_MCLK]
68	PA9 **	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11 **	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12 **	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10 **	I/O	I2S3_CK	I2S3_SCK [CS43L22_SCLK]
80	PC12 **	I/O	I2S3_SD	I2S3_SD [CS43L22_SDIN]
85	PD4 *	I/O	GPIO_Output	Audio_RST [CS43L22_RESET]
86	PD5 *	I/O	GPIO_Input	OTG_FS_OverCurrent
89	PB3	I/O	SYS_JTDO-SWO	SWO
90	PB4	I/O	GPIO_EXTI4	
91	PB5 *	I/O	GPIO_Input	
92	PB6	I/O	I2C1_SCL	
94	BOOT0	Boot		
96	PB9	I/O	I2C1_SDA	
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [L3GD20_INT2]
99	VSS	Power		
100	VDD	Power		

 * The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration
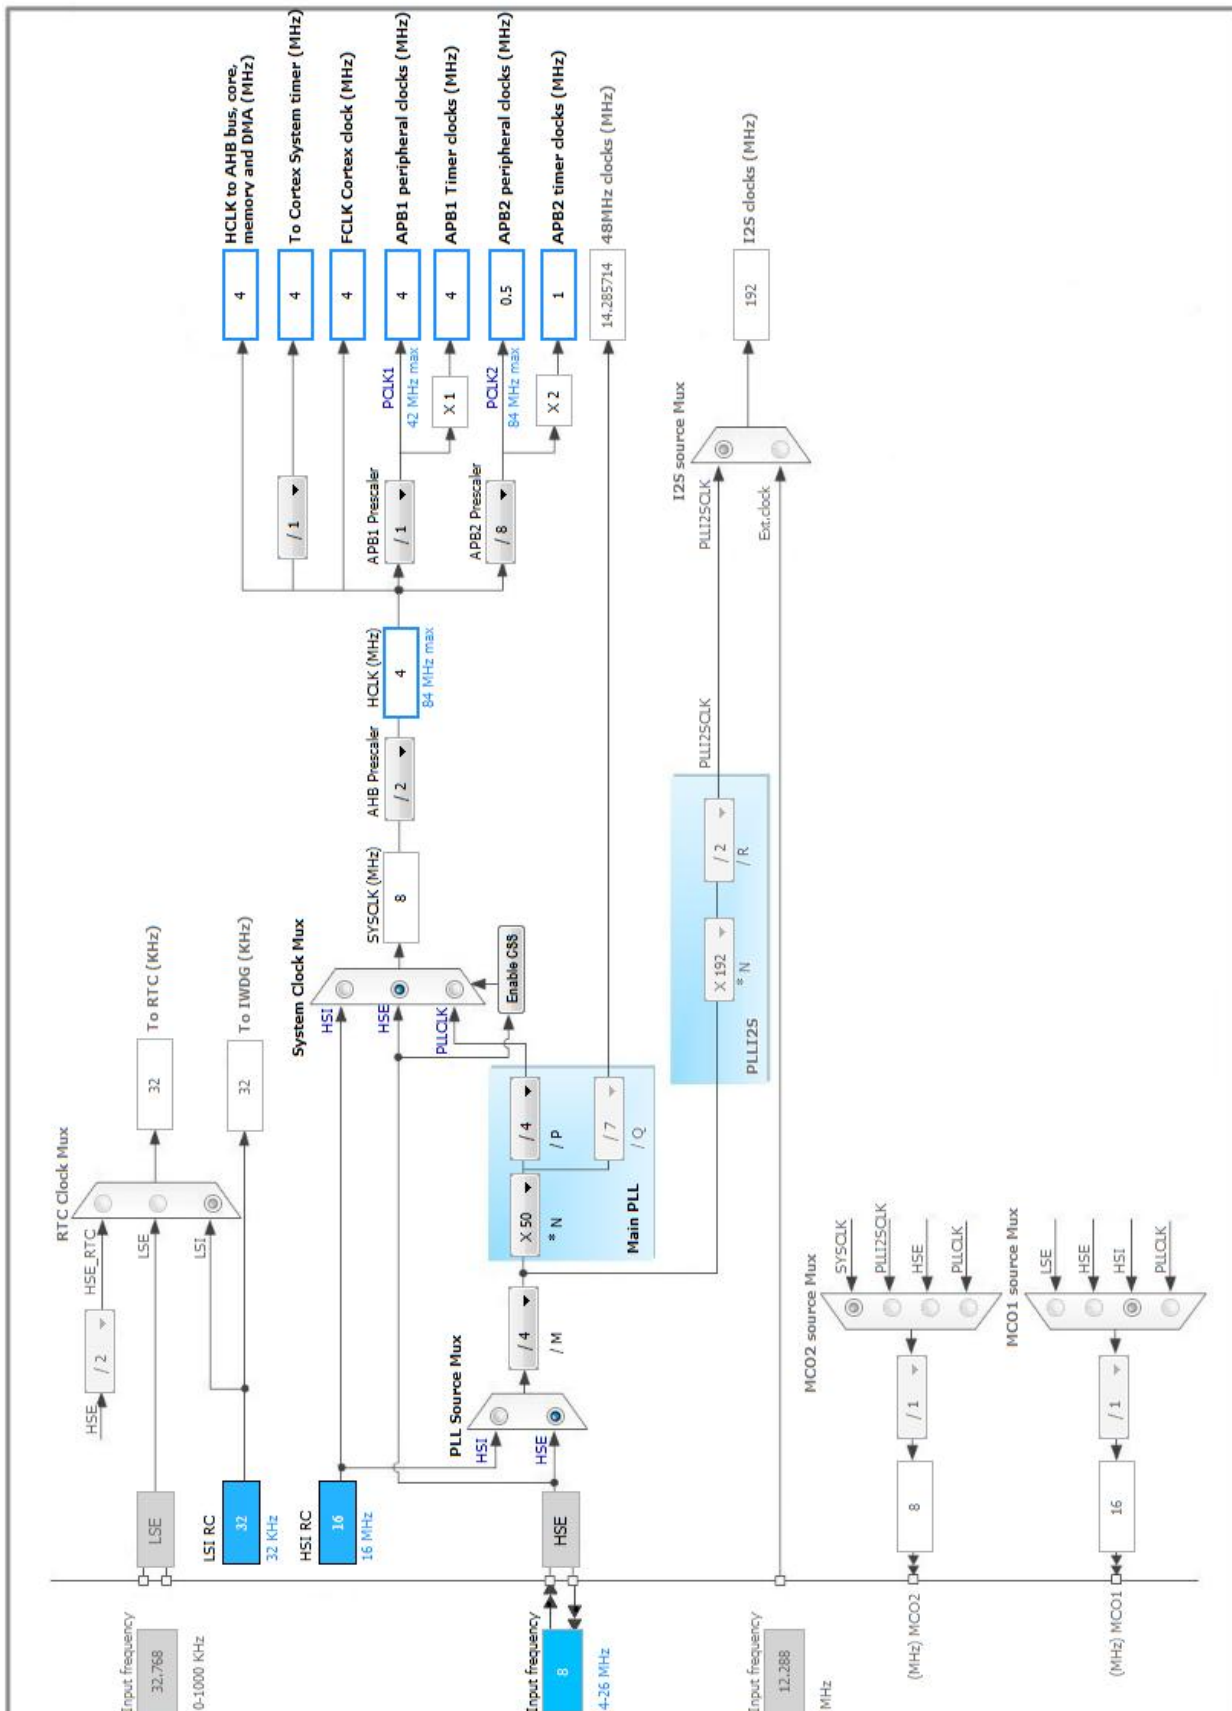
5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16

Power Parameters:

Power Regulatror Voltage Scale	Power Regulator Voltage Scale 1

5.3. SPI1

Mode: Transmit Only Master

5.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	**LSB First ***

Clock Parameters:

Prescaler (for Baud Rate)	**128 ***
Baud Rate	**3.906 KBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.4. SPI2

Mode: Transmit Only Master

5.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**2.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.5. SYS

Debug: SWD and Asynchronous Trace

5.6. FREERTOS

mode: Enabled

5.6.1. Config parameters:

Versions:

CMSIS-RTOS version	1.02
FreeRTOS version	8.2.1

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Enabled
USE_COUNTING_SEMAPHORES	Enabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4
USE_ALTERNATIVE_API	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

USE_TRACE_FACILITY	Enabled
GENERATE_RUN_TIME_STATS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

5.6.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	High *	
RCC	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	High *	SPI1_SCK [L3GD20_SC/SPC]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	High *	SPI1_MISO [L3GD20_SDA/SDI/SDO]
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	PDM_OUT [MP45DT02_DOUT]
	PA4	I2S3_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_WS [CS43L22_LRCK]
	PB10	I2S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	CLK_IN [MP45DT02_CLK]
	PC7	I2S3_MCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_MCK [CS43L22_MCLK]
	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	High *	OTG_FS_ID
	PA11	USB_OTG_FS_	Alternate Function Push Pull	No pull-up and no pull-down	High *	OTG_FS_DM

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		DM				
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	**High ***	OTG_FS_DP
	PC10	I2S3_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SCK [CS43L22_SCLK]
	PC12	I2S3_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SD [CS43L22_SDIN]
GPIO	PE2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	[LSM303DLHC_DRDY]
	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
	PE5	GPIO_EXTI5	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	[LSM303DLHC_INT2]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Audio_RST [CS43L22_RESET]
	PD5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	OTG_FS_OverCurrent
	PB4	GPIO_EXTI4	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PB5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	
	PE1	GPIO_EXTI1	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	MEMS_INT2 [L3GD20_INT2]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
System tick timer	true	0	0
EXTI line4 interrupt	true	10	0
Non maskable interrupt	unused		
Memory management fault	unused		
Pre-fetch fault, memory access fault	unused		
Undefined instruction or illegal state	unused		
Debug monitor	unused		
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI1 global interrupt	unused		
SPI2 global interrupt	unused		

* User modified value

7. Power Plugin report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F401
MCU	STM32F401VCTx
Datasheet	024738_Rev5

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	HAM_TRX
Project Folder	C:\Users\os\workspace_STM\HAM_TRX
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.9.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No