

Computer Project 1: Comparing Analytic and Finite-Difference Numerical solutions to a transient system

Owen Strong

Prof.: Caleb Brooks

March 4th, 2026

Contents

1	Introduction and Background	1
1.1	Lump Sum Approximation	2
1.2	Finite Difference	4
2	Experimental Procedure	5
3	Experimental Results	6
3.1	Analytical Solution	7
3.2	Numerical Solution	10
4	Discussion	13
5	Conclusions	14
A	Numerical Solution Script	16

Abstract

1 Introduction and Background

Heat transfer is a critical phenomenon to understand in virtually any engineering field, from the cooling of spacecraft in vacuum to the power generation of a nuclear reactor to simply saving money heating a house during winter.

Temperature is a macroscopic phenomenon, describing the average kinetic energy of particles within a medium (as opposed to the bulk motion of the medium). Heat transfer, then, is the thermal energy in transit caused by a spacial difference in temperature. Heat transfer may be understood as a combination of three empirical phenomena: conduction, convection, and radiation, shown in Fig. 1. Of these, conduction and convection will be the primary interest in this report.

Conduction, in which thermal energy diffuses through particles in the medium, follows Fourier's law:

$$\vec{q}''_{cond} = -k\nabla T \quad (1)$$

where $\vec{q}''_{cond}$ is the directional heat flux (i.e. heat transfer per unit area) caused by conduction, ∇T is the temperature gradient, and k is *thermal conductivity*, a material property relating the two.

Convection, in which conduction is combined with bulk motion of a fluid, is described for a surface interface between a material and the fluid, using Newton's law of cooling:

$$\vec{q}''_{conv} = h(T_f - T_s) \quad (2)$$

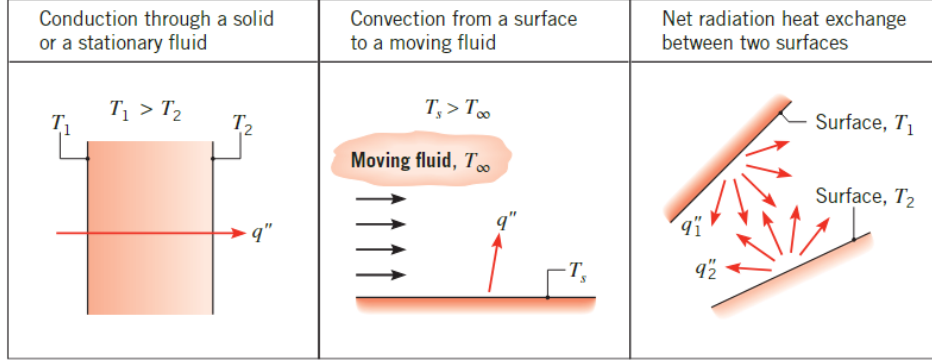


Figure 1: Conduction, convection, and radiation heat transfer modes. Figure sourced from *Fundamentals of Heat and Mass Transfer*.[\[1\]](#)

Where T_f is the temperature of the convective fluid, T_s the temperature at the surface, and $\vec{q}''_{cond}$ is the directional heat flux resulting from this convection.

Fourier's law of conduction can be related to a control volume to derive the General Heat Diffusion Equation (GHDE) for a particular location within a material[\[1\]](#):

$$\rho c_p \frac{\partial T}{\partial t} = -\nabla k \nabla T + q''' \quad (3)$$

where ρ represents mass density and c_p the heat capacity of the material, and q''' the volumetric heat generation at that location. For a material with uniform properties, this is typically simplified to:

$$\frac{1}{\alpha} \frac{\partial T}{\partial t} = \frac{q'''}{k} - \nabla^2 T \quad (4)$$

where α is the thermal diffusivity of the material:

$$\alpha = \frac{k}{\rho c_p} \quad (5)$$

This equation, in either form, can be solved analytically. However, doing so in cases considering anything more than one dimension (including considering time) is non-trivial, and quickly devolves into tedious calculus including summations of eigenfunctions.[\[1\]](#)

For a transient one-dimensional problem (one with time dependence), there are two immediate techniques to avoid this analysis: the lumped sum approximation, and a numerical simulation.

In this report, an analytic solution using the lumped sum approximation will be compared to a finite difference numerical solution, for a problem involving a uniform sphere subjected to convection in a cooling fluid.

1.1 Lump Sum Approximation

Consider a uniform sphere which is highly conductive, subjected to convective cooling by a fluid surrounding it. One could solve for the temperature distribution within the sphere

over time using Equation 4, but if the sphere is highly conductive (high k) compared to the convective ability of the fluid and surface (low h), then one can instead assume a uniform temperature $\bar{T}$ over the surface. Applying a control volume around the sphere, uniform over its volume V , with a surface area A in contact with the fluid:

$$\rho c_p V \frac{d\bar{T}(t)}{dt} = -hA(\bar{T}(t) - T_f) + q''' \quad (6)$$

This equation, which now only considers one variable, can be solved by changing perspective to the relative temperature $\bar{\theta} = \bar{T} - T_f$ (assuming heat generation $q''' = 0$):

$$\begin{aligned} \rho c_p V \frac{d\bar{\theta}}{dt} &= -hA(\bar{\theta}) + q''' \\ \frac{d\bar{\theta}}{dt} &= -\frac{hA}{\rho c_p V} \bar{\theta} \\ \frac{1}{\bar{\theta}} d\bar{\theta} &= -\frac{hA}{\rho c_p V} dt \\ \ln(\bar{\theta}) &= -\frac{hA}{\rho c_p V} t + C \\ &\rightarrow \tau = \frac{hA}{\rho c_p V} \\ \ln(\bar{\theta}) &= -\frac{t}{\tau} + C \\ \bar{\theta} &= C e^{-\frac{t}{\tau}} \\ &\rightarrow \bar{\theta}(t=0) = \bar{\theta}_0 \\ \bar{\theta}_0 &= C e^{-\frac{0}{\tau}} = C \\ \bar{\theta} &= \bar{\theta}_0 e^{-\frac{t}{\tau}} \end{aligned} \quad (7)$$

If one component out of the material properties contained in the time constant τ , the initial temperature difference $\bar{\theta}_0$, the time t , or the temperature difference $\bar{\theta}$ at that time, this equation can be used to solve for the missing value of otherwise known system, such as the convection coefficient necessary in a fluid for a given conductive sphere to go from an initial temperature to a known final temperature within that fluid after a known time.

To consider whether it is appropriate to use the lumped sum approximation, the Biot number, a dimensionless quantity relating thermal convection to conduction, should be appropriately low:

$$B_i = \frac{hL}{k} \leq 0.1 \quad (8)$$

where L is the characteristic length of the system in question, in this case the diameter of the sphere, and k and h the conductive material's conductivity and the fluid-material interface's convection coefficient, respectively.

1.2 Finite Difference

If, instead, one discretizes Equation 4 (once again assuming no heat generation) over finite differences in time ($t = p\Delta t$) and the radius of the sphere ($r = n\Delta r$):

$$\begin{aligned}\frac{1}{\alpha} \frac{\partial T}{\partial t} &= \frac{q'''}{k} - \nabla^2 T \\ \frac{1}{\alpha} \frac{\partial \bar{\theta}}{\partial t} &= -\frac{1}{r^2} \frac{d}{dr} \left(r^2 \frac{d\bar{\theta}}{dr} \right) \\ \frac{1}{\alpha} \frac{\partial \bar{\theta}}{\partial t} &= -\frac{1}{r^2} \frac{d}{dr} \left(n^2 \Delta r^2 \frac{T_{n+\frac{1}{2}} - T_{n-\frac{1}{2}}}{\Delta r} \right) \\ \frac{1}{\alpha} \frac{\partial \bar{\theta}}{\partial t} &= -\frac{1}{r^2} \frac{d}{dr} \left(n^2 \Delta r (T_{n+\frac{1}{2}} - T_{n-\frac{1}{2}}) \right) \\ \frac{\partial \bar{\theta}}{\partial t} &= \frac{\alpha}{\Delta r^2} \frac{(n + \frac{1}{2})^2 [T_{n+1} - T_n] - (n - \frac{1}{2})^2 [T_n - T_{n-1}]}{n^2}\end{aligned}$$

discretizing over time such that the gradient is evaluated at the previous timestep p (“*explicit*” finite difference) and introducing the differential system’s Fourier number F_o :

$$\begin{aligned}\frac{\partial \bar{\theta}}{\partial t} &= \frac{\alpha}{\Delta r^2} \frac{(n + \frac{1}{2})^2 [T_{n+1} - T_n] - (n - \frac{1}{2})^2 [T_n - T_{n-1}]}{n^2} \\ \frac{T_n^{p+1} - T_n^p}{\Delta t} &= \frac{\alpha}{\Delta r^2} \frac{(n + \frac{1}{2})^2 [T_{n+1}^p - T_n^p] - (n - \frac{1}{2})^2 [T_n^p - T_{n-1}^p]}{n^2} \\ \frac{T_n^{p+1} - T_n^p}{\Delta t} &= \frac{\alpha \Delta t}{\Delta r^2} \frac{(n + \frac{1}{2})^2 [T_{n+1}^p - T_n^p] - (n - \frac{1}{2})^2 [T_n^p - T_{n-1}^p]}{n^2} \\ &\rightarrow F_o = \frac{\alpha \Delta t}{\Delta r^2} \\ T_n^{p+1} - T_n^p &= F_o \frac{(n + \frac{1}{2})^2 [T_{n+1}^p - T_n^p] - (n - \frac{1}{2})^2 [T_n^p - T_{n-1}^p]}{n^2} \\ T_n^{p+1} &= T_n^p + F_o \frac{(n + \frac{1}{2})^2 [T_{n+1}^p - T_n^p] - (n - \frac{1}{2})^2 [T_n^p - T_{n-1}^p]}{n^2}\end{aligned}\tag{9}$$

By selecting offset indices of $n \in \{\frac{1}{2}, \frac{3}{2}, \frac{5}{2}, \dots\}$, one may dictate a symmetric boundary condition where no heat passes through the center of the sphere, making the node $n = \frac{1}{2}$ only dependent on its outer neighbor $\frac{3}{2}$:

$$\begin{aligned}T_n^{p+1} &= T_n^p + F_o \frac{(n + \frac{1}{2})^2 [T_{n+1}^p - T_n^p] - (n - \frac{1}{2})^2 [T_n^p - T_{n-1}^p]}{n^2} \\ &\rightarrow n = \frac{1}{2} \\ T_n^{p+1} &= T_n^p + F_o \frac{(1)^2 [T_{n+1}^p - T_n^p] - (0)^2 [T_n^p - T_{n-1}^p]}{\frac{1}{2}^2} \\ T_{\frac{1}{2}}^{p+1} &= T_{\frac{1}{2}}^p + F_o \frac{T_{\frac{3}{2}}^p - T_{\frac{1}{2}}^p}{\frac{1}{2}^2}\end{aligned}$$

And, for the outermost node n_s placed exactly at the surface of the sphere meeting the convective fluid, applying a control volume meeting the previous node at the internal conducting control surface $n_s - \frac{1}{2}$:

$$\begin{aligned} \frac{V_{n-\frac{1}{2},n}\rho c_p}{\delta t}(T_n^{p+1} - T_n^p) &= kA_{n-\frac{1}{2}} \frac{T_{n-1}^p - T_n^p}{\Delta r} + hA_n(T_f - T_n^p) \\ \rightarrow V_{n-\frac{1}{2},n} &= \frac{4}{3}\pi(n^3 - (n - \frac{1}{2})^3) \\ \rightarrow A_n &= 4\pi n^2 \\ T_n^{p+1} - T_n^p &= 3F_o \frac{(n - \frac{1}{2})^2}{n^3 - (n - \frac{1}{2})^3}(T_{n-1}^p - T_n^p) + 3F_o B_i \frac{n^2}{n^3 - (n - \frac{1}{2})^3}(T_f - T_n^p) \end{aligned}$$

or more concisely, by establishing dimensionless internal and edge geometric attenuation coefficients $\Gamma_i = \frac{(n_s - \frac{1}{2})^2}{n_s^3 - (n_s - \frac{1}{2})^3}$, $\Gamma_e = \frac{n_s^2}{n_s^3 - (n_s - \frac{1}{2})^3}$

$$T_{n_s}^{p+1} = (1 - 3F_o\Gamma_i - 3F_oB_i\Gamma_e)T_{n_s}^p + 3F_o\Gamma_i T_{n_s-1}^p + 3F_oB_i\Gamma_e T_f \quad (10)$$

As ensuring stability requires a positive coefficient of the current temperature T_n^p , this yields a strict stability criterion:

$$\frac{1}{3} \geq F_o(\Gamma_i + B_i\Gamma_e) \quad (11)$$

Since in Equation 11, the characteristic length and time in F_o and B_i correspond to the differential length Δr and time Δt , B_i (only dependent on geometry) can be used to solve for the required F_o ,

$$F_o \leq \frac{1}{3(\Gamma_i + B_i\Gamma_e)} \quad (12)$$

then solved for the maximum stable timestep Δt_{max} :

$$\begin{aligned} \frac{\alpha \Delta t}{\Delta r^2} &\leq \frac{1}{3(\Gamma_i + B_i\Gamma_e)} \\ \Delta t_{max} &= \frac{\Delta r^2}{3\alpha(\Gamma_i + B_i\Gamma_e)} \end{aligned}$$

2 Experimental Procedure

A Python script was constructed, implementing Equations 9, 10, and 11 to solve for the temperature distribution within a pure copper sphere (Using tabulated material property data[1]). This script, as well as accompanying sample input and output files, are included in Appendix A.

The initial temperature of the sphere $T_0 = 84^\circ\text{C}$, and surface temperature $T_1 = 64^\circ\text{C}$ after known time $t_1 = 95\text{s}$ in a fluid of known temperature $T_f = 25^\circ\text{C}$, are understood for the problem. Using the analytical solution in Equation 7, the necessary surface convection

coefficient h was solved for. Using this value of h , the Biot number of the whole sphere was calculated, and used to check the validity of the lumped sum approximation.

The analytic solution was then evaluated over a range of time $0 \leq t \leq t_{final}$, where t_{final} is the analytically evaluated time when the sphere's temperature reaches $\approx 25.01^\circ\text{C}$. This evaluation was repeated with variations in geometry, and variations in the convection coefficient h to assess the effects of these system parameters. For geometry comparison, the base system was compared to a system of double radius, and a system of identical radius but hypothetical double surface area (approximating a wrinkled surface of sorts). For convection coefficient comparison, values of $2h$, $\frac{h}{2}$, and the original h were compared.

Using the `Python` script, the numerical solution was evaluated first discretized over one node (matching the lumped sum analytic solution) and over various different Δt and compared to the analytic solution, to assess the effect of varying time frequency. Three values of Δt were assessed: the maximum stable Δt evaluated using Equation 11, a $\Delta t = \frac{t_{final}}{20}$ to yield 20 timesteps, and a $\Delta t = \frac{t_{final}}{200}$ to yield 200 timesteps.

Finally, using a radial discretization across 15 nodes, numerical solutions were made for a system with the original parameters, and a system with heavily reduced conduction $\frac{k}{1000}$ to show the effect of Biot number on the validity of the lumped sum approximation.

3 Experimental Results

Using Equation 7 and the known parameters of the system at time $t_1 = 95\text{s}$:

$$\begin{aligned}\bar{\theta} &= \bar{\theta}_0 e^{-\frac{t_1}{\tau}} \\ (64 - 25) &= (84 - 25) e^{-\frac{t_1}{\tau}} \\ e^{-\frac{t_1}{\tau}} &= \frac{64 - 25}{84 - 25} \\ -\frac{t_1}{\tau} &= \ln\left(\frac{64 - 25}{84 - 15}\right) = -0.413 \\ \tau &= \frac{95\text{s}}{0.413} = 229.5\text{s} \\ \rightarrow \tau &= \frac{\rho c_p V}{hA} \\ h &= \frac{\rho c_p V}{\tau A}\end{aligned}$$

Using tabulated copper properties $\rho = 8933 \frac{\text{kg}}{\text{m}^3}$, $c_p = 385 \frac{\text{J}}{\text{kg}\cdot\text{K}}$, and sphere radius $R = 0.01\text{m}$:

$$h = 49.956 \frac{\text{W}}{\text{m}^2 \cdot \text{K}} \tag{13}$$

a final thermal convection coefficient of $49.956 \frac{\text{W}}{\text{m}^2 \cdot \text{K}}$ was obtained.

This yielded a Biot number for the spherical system:

$$B_i = \frac{hD}{k} = \frac{49.956 \frac{\text{W}}{\text{m}^2 \cdot \text{K}} \cdot 0.02\text{m}}{401 \frac{\text{W}}{\text{m} \cdot \text{K}}} = 0.00249 < 0.1 \quad (14)$$

validating the lumped-sum approximation.

3.1 Analytical Solution

Using the identified value of h , an analytic solution was successfully built according to Equation 7.

Using the complete analytic solution yielded a $t_{final} = 1992.525\text{s}$:

$$\begin{aligned} \bar{\theta} &= \bar{\theta}_0 e^{-\frac{t_{final}}{\tau}} \\ (25.01 - 25) &= (84 - 25) e^{-\frac{t_{final}}{\tau}} \\ e^{-\frac{t_{final}}{\tau}} &= \frac{25.01 - 25}{84 - 25} \\ -\frac{t_{final}}{\tau} &= \ln \left(\frac{25.01 - 25}{84 - 25} \right) = -8.68 \\ t_{final} &= 8.68 \times 229.5\text{s} = \boxed{1992.525\text{s}} \end{aligned}$$

Figure 2 showcases the analytic solution across $0 \leq t \leq 1992.525\text{s}$, while Figure 3 focuses on behavior near $t \approx 95\text{s}$. Based on the low Biot number suggesting validity of the lumped sum approach, and the temperature at $T(t = 95\text{s}) \approx 64^\circ\text{C}$ closely matching the known observation ($T_{surf}(95\text{s}) = 64^\circ\text{C}$), the analytic solution appears to be a reasonably accurate description of the system, with temperature gradually approaching 25°C in exponential decay.

Figure 4 compares the transient temperature behavior for spheres of different surface area to volume ratios.

Figure 5 compares the transient temperature behavior for spheres of identical starting temperature to the original system, but with different convective coefficients at the fluid boundary.

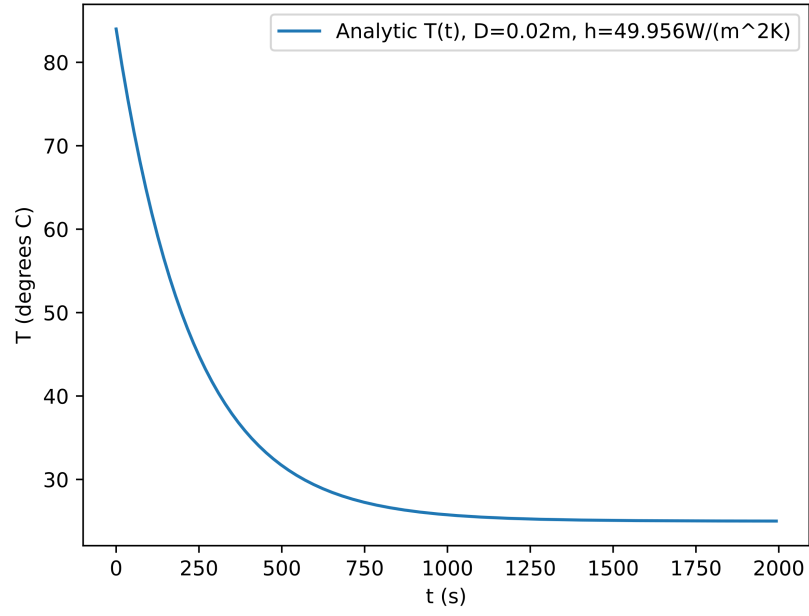


Figure 2: The lumped sum analytical solution of $T(t)$ across times $0 \leq t \leq 1992.525$ s.

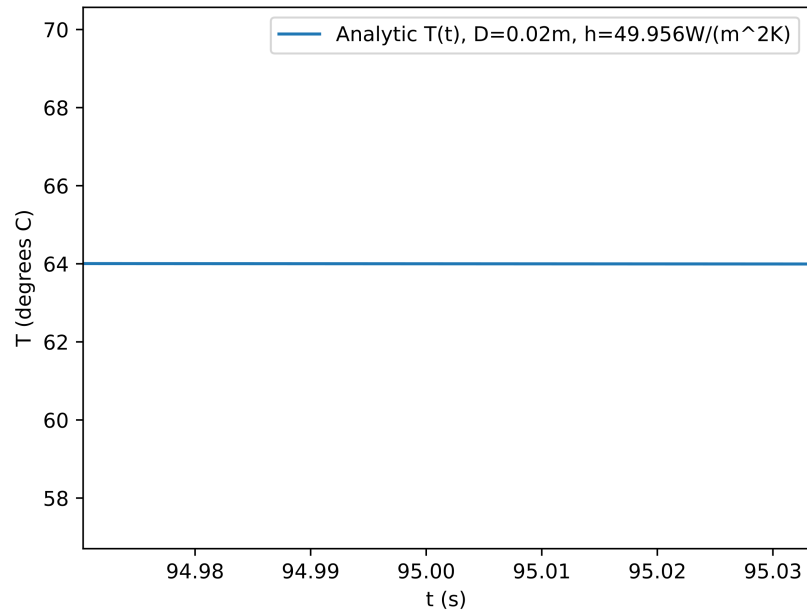


Figure 3: The lumped sum analytical solution of $T(t)$, focused on $t = 95$ s.

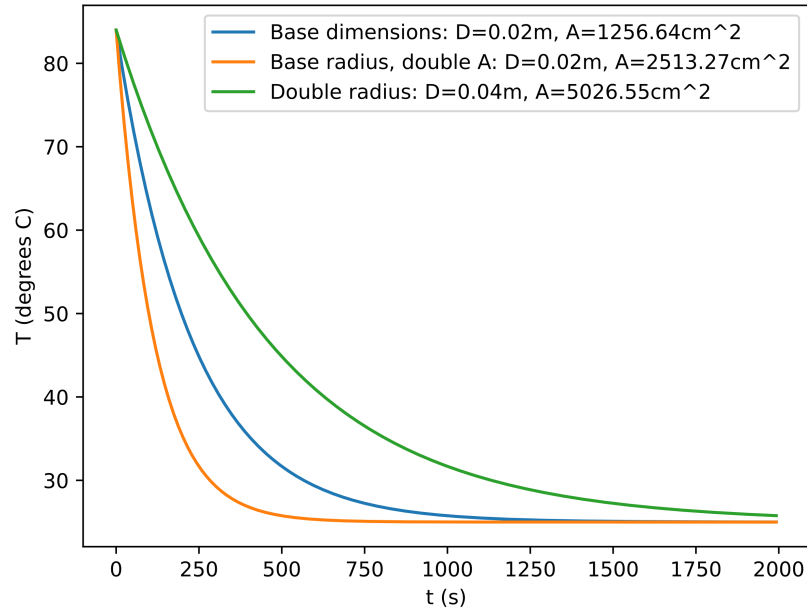


Figure 4: The analytical transient temperature behavior for copper spheres of the original dimensions, doubled surface area, and doubled radius.

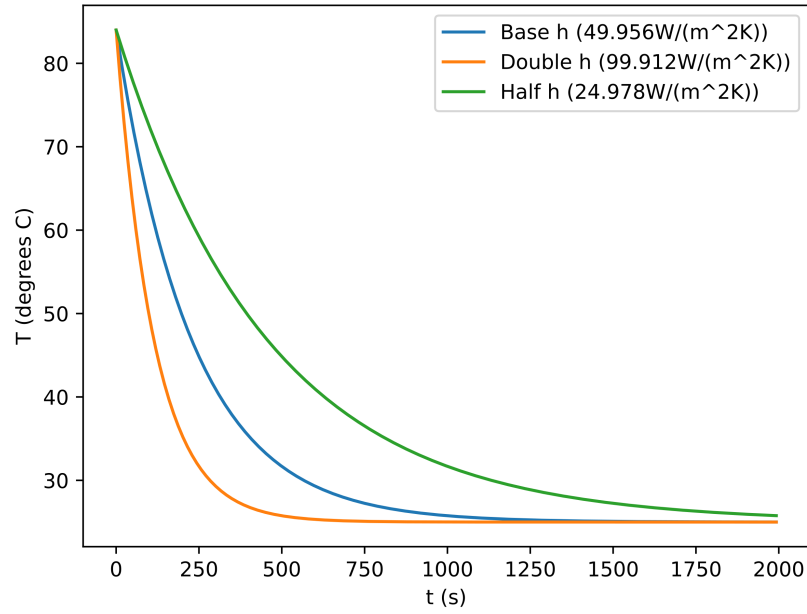


Figure 5: The analytical transient temperature behavior for copper spheres in the original fluid and fluids yielding double and half the convective coefficients, respectively.

3.2 Numerical Solution

Using the identified value of h , a numerical solution according to the explicit finite difference scheme of Equation 9 was successfully constructed, as shown in Appendix A, with the following results:

In Figure 6, such numerical solutions without discretization in space (having only a single node, akin to the lumped-sum model), are shown for different discretizations in time, with a timestep Δt ranging from the minimum stable value of 172.112s to a value of 9.963 seconds (yielding 200 timesteps).

Figure 7 compares solutions with 15 different radial nodes, solving for a range of temperatures from the inside of the sphere to the outside over time. Specifically, it compares two such solutions, one for the original system parameters, and one for which the copper of thermal conductivity $k = 401 \frac{\text{W}}{\text{m}\cdot\text{K}}$ has been replaced with a material with identical properties saved for a drastically reduced conductivity $k_2 = 0.401 \frac{\text{W}}{\text{m}\cdot\text{K}}$, resulting in a Biot number $B_{i,2} = 2.492$. In the figure, the range of minimum (at edge) and maximum (at center) temperatures of the spheres may be observed over time.

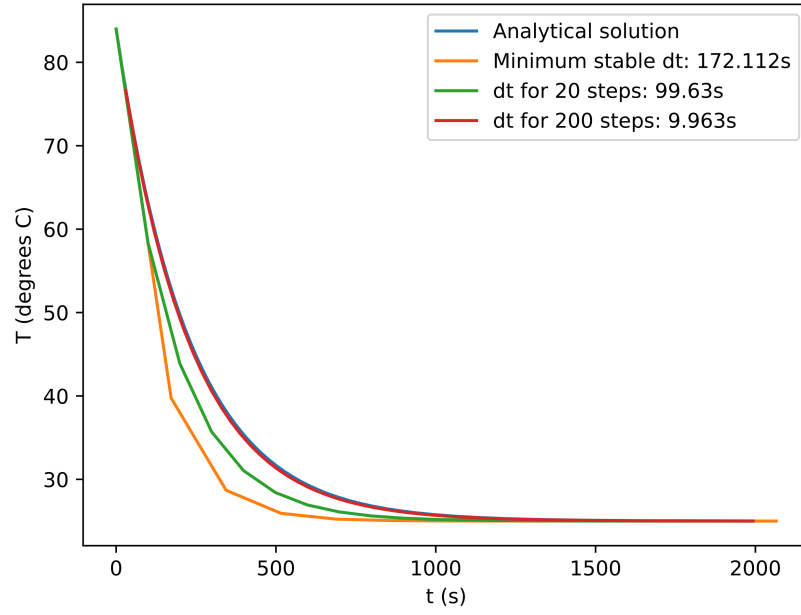


Figure 6: A single-node explicit finite difference solution for $T(t)$, evaluated for $\Delta t \in \left\{ \Delta t_{max}, \frac{t_{final}}{20}, \frac{t_{final}}{200} \right\}$, compared to the lumped sum analytical solution.

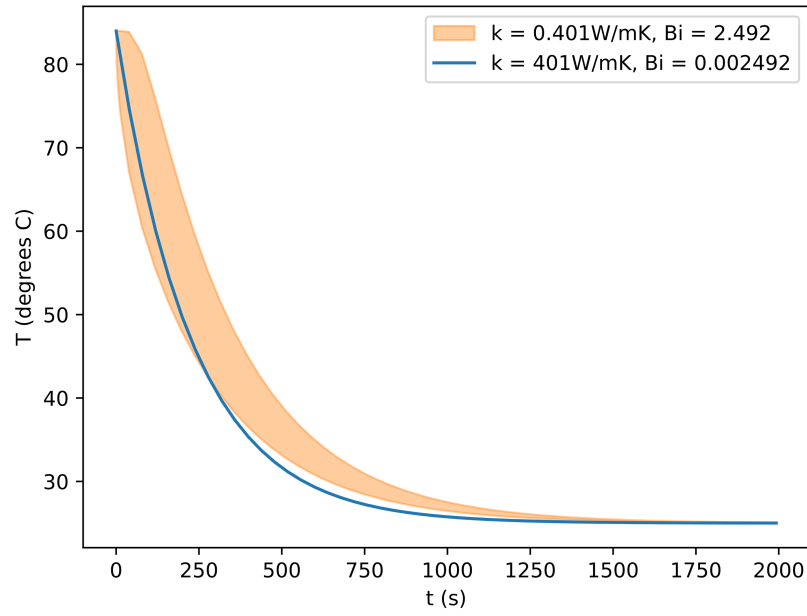


Figure 7: A 15-node explicit finite difference solution for $T(t)$ of both the original system, and one with a heavily reduced thermal conductivity k and increased Biot number, showing the range of temperatures at any time $0 \leq t \leq t_{final}$ for either system. Both are evaluated with $\Delta t = \Delta t_{max}$ for the given spacial discretization.

4 Discussion

Based on the low Biot number $B_i = 0.00249 < 0.1$ suggesting validity of the lumped sum approach, and the analytical temperature at $T(t = 95\text{s}) \approx 64^\circ\text{C}$ closely matching the known observation ($T_{surf}(95\text{s}) = 64^\circ\text{C}$) in Figure 3, the analytic solution displayed in Figure 2 appears to be a reasonably accurate description of the system, with temperature gradually approaching 25°C in exponential decay.

Comparison of different geometries in Figure 4 highlights a noticeable dependence of behavior on the ratio of surface area to volume. The sphere of double radius (yielding half the surface area to volume ratio), approaches the fluid temperature much more slowly, whereas the sphere of identical dimensions with doubled surface area (double the surface area to volume ratio) approaches the fluid temperature much more quickly.

Likewise, comparison of the different convection coefficients in Figure 5 highlights a very similar dependence of transient behavior on this coefficient. In the fluid where h was doubled, temperature approached that of the fluid very quickly, and vice versa.

These observations are both congruent with the analytic solution to temperature of Equation 7:

$$\begin{aligned}\bar{\theta} &= \bar{\theta}_0 e^{-\frac{t}{\tau}} \\ &= \bar{\theta}_0 e^{-\frac{h A t}{\rho c_p V}}\end{aligned}$$

which suggests that either a higher value of h or ratio A/V yields faster behavior, and vice versa.

Across the various discretizations in time of single-node finite-difference solutions, shown in Figure 6, a trend in accuracy can be observed where finer values of Δt yield a transient behavior much closer to the analytical solution. This can be explained as a natural consequence of the explicit finite difference scheme. Since the temperature at a time Δt later is evaluated using the difference in temperature over space *now*, the scheme assumes that the temperature variation over space does not change much over that time period. But since the temperature difference driving this change necessarily decays in time, this scheme will consistently overestimate the magnitude of change by some amount. For larger and larger values of Δt , over which the temperature gradient would itself change more and more, this leads to a more and more rapidly decaying solution, as seen in the figure, where the maximally coarse solution using Δt_{max} approaches the fluid temperature drastically faster.

Figure 7 shows the importance of determining whether a lumped-sum approach is valid, and the power of finite difference scheme. While for the given system, which has a Biot number of 0.00249, the lumped sum approach is demonstrably valid, with a nearly imperceptible range of temperatures from the center to the edge, the comparable system with less conductivity quickly develops a very substantial gradient in temperature, eventually taking longer to approach fluid temperature as heat struggles to move from the interior to the surface.

The spatially-discretized solutions, even with only 15 nodes, allows this transient behavior to be clearly observed without an analytical solution, with the Biot number for an individual differential node remaining sufficiently low to simulate ($B_{i,node} = \frac{h\Delta r}{k} = 0.086$).

5 Conclusions

The goals of this report were largely met.

An analytical model of the system's transient behavior was successfully designed and used to estimate a convection coefficient $h = 49.956 \frac{\text{W}}{\text{m}^2 \cdot \text{K}}$.

References

- [1] T. L. Bergman and A. S. Lavine, *Fundamentals of heat and mass transfer*, Eighth edition. Hoboken, NJ: John Wiley & Sons, 2017, 1 p., ISBN: 978-1-119-32042-5 978-1-119-33767-6.

A Numerical Solution Script

The full Python script used to evaluate the explicit finite difference scheme is included below:

```
import json
import os.path

INPUT_PATH="input.json"
BASE_OUTPUT_PATH="output/output"
input = json.load(open(INPUT_PATH))

# Copper Material Properties
rho = 8933 # kg / m^3
c_p = 385 # J / kg*K
if "k_Wm-1K-1" in input:
    k = input["k_Wm-1K-1"] # W / m*K, default of 401
else:
    k = 401
alph = k / (rho*c_p) # (m^2 / s)

# Fluid properties
h = input["h_Wm-2K-1"] # W/m^2*K
T_INF = input["T_INF_C"] # C

# Experiment Setup
R = input["R_m"] # m
N_NODES = input["N_NODES"]
dr = R / (N_NODES - 0.5) # m, chosen so that final node (N-1) + 0.5 corresponds to the r
T_0 = input["T_0_C"] # C
t_final = input["total_time_s"] # s

# Secondary setup (necessary dt)
SAFETY = input["SAFETY"] # Use smaller Fo than necessary
Bi = h*dr/k # Biot number, dimless
n_edge = N_NODES-0.5 # n of the last node, corresponds to radius of surface
n_inge = n_edge-0.5 # n of the border with second to last node (inside edge)
Fo = SAFETY * (1 / (3 * (n_inge**2/(n_edge**3 - n_inge**3) + Bi*n_edge**2/(n_edge**3 -
# print(f"Biot: {Bi}, Fo: {Fo}")
dt = Fo * dr**2 / alph
if "dt" in input and not input["dt"]=="auto":
    dt = input["dt"]
    Fo = dt*alph / (dr**2)
print(f"dt: {dt} s")

T_vals:list = [T_0 for i in range(N_NODES)] #
```

```

n_vals:list = [i+0.5 for i in range(N_NODES)] # The actual value n of each node (where r

t_elapsed = 0
t_steps = []
T_vals_sets = [] #List of every T distribution at each timestep.
p = 0
num_timesteps = t_final / dt
num_prints = min(input("num_t_output"), num_timesteps)
print_freq = int(num_timesteps / num_prints)

def push():
    print(f"T({t_elapsed:2.3f}s) = {[f"{T:.3f}" for T in T_vals]}C")
    T_vals_sets.append(T_vals)
    t_steps.append(t_elapsed)

push()

while (t_elapsed < t_final):
    T_vals_next = [0 for i in range(N_NODES)] # Filler list

    if N_NODES > 1:
        # Center node
        T_n0 = T_vals[0]
        T_n1 = T_vals[1]
        n0 = n_vals[0]
        nh = n0 + 0.5
        T_vals_next[0] = T_n0 + Fo * (nh**2 / n0**2) * (T_n1-T_n0)

        for i in range(1, N_NODES-1): # Interior nodes, not special cases
            n = n_vals[i]
            T_n = T_vals[i]
            T_i = T_vals[i-1]
            T_o = T_vals[i+1]

            T_vals_next[i] = T_n + Fo * ((n+0.5)**2*(T_o-T_n) - (n-0.5)**2*(T_n-T_i)) /
            # print(f"new T_{i}: {T_vals_next[i]}")

        # Exterior node
        T_nf = T_vals[-1]
        T_vals_next[-1] = T_nf + 3*Fo * ((n_inge**2/(n_edge**3 - n_inge**3))*(T_vals[-2]
    else:
        T_nf = T_vals[0]
        T_vals_next[0] = T_nf + 3*Fo * (Bi*n_edge**2/(n_edge**3 - n_inge**3))*(T_INF-T_n

```

```

        t_elapsed += dt
        T_vals = T_vals_next
        p+=1

        if (p % print_freq == 0 or p < 10):
            push()
push()

output = {
    "input":input,
    "Biot (dr)":Bi,
    "Biot (D)":h*(2*R)/k,
    "t_steps":t_steps,
    "T_vals":T_vals_sets,
    "dt":dt
}

next_idx = 0
output_path = BASE_OUTPUT_PATH + ".json"
while os.path.isfile(output_path):
    output_path = BASE_OUTPUT_PATH + f"_{next_idx}.json"
    next_idx+=1
json.dump(output, open(output_path, "w"), indent=4)

```

The script accepts an input such as the example `input.json`:

```

{
    "h_Wm-2K-1": 49.95605733,

    "N_NODES": 10,
    "dt": "auto",
    "T_INF_C": 25,
    "T_0_C": 84,
    "total_time_s": 1992.525237,
    "R_m": 0.01,
    "k_Wm-1K-1": 401,
    "num_t_output": 50,
    "SAFETY": 0.75
}

```

And produces a corresponding output such as `output.json`:

```

{
    "input": {

```

```

    "k_Wm-1K-1": 401,
    "T_INF_C": 25,
    "T_O_C": 84,
    "total_time_s": 1992.525237,
    "R_m": 0.01,
    "N_NODES": 10,
    "h_Wm-2K-1": 49.95605733,
    "dt": "auto",
    "num_t_output": 50,
    "SAFETY": 0.75
  },
  "Biot (dr)": 0.00013113547008793803,
  "Biot (D)": 0.002491573931670823,
  "dt": 0.0037647702348469264,
  "t_steps": [
    0,
    0.0037647702348469264,
    ...,
    1992.527235387602
  ],
  "T_vals": [
    [
      84,
      84,
      84,
      84,
      84,
      84,
      84,
      84,
      84,
      84
    ],
    [
      84.0,
      84.0,
      84.0,
      84.0,
      84.0,
      84.0,
      84.0,
      84.0,
      84.0,
      83.99353554087601
    ]
  ],

```

```

...
[
    25.009797880330684,
    25.009797778653294,
    25.009797524462186,
    25.009797129061415,
    25.009796595285344,
    25.00979592427711,
    25.00979511661838,
    25.009794172652125,
    25.009793092603644,
    25.009791876634377
]
}

```

where ‘‘...’’ denotes values truncated for brevity.