


SPRING-LOADED CONNECTORS

SERIES 836 & 838 • 2mm GRID SURFACE MOUNT • SINGLE AND DOUBLE ROW STRIPS




- Modular contacts for use on 2mm grid, available in single and double row contact strips with rated travel of .0275" and max. stroke of .055"
- Precision-machined piston / base and gold-plated components assure up to 1,000,000 cycle life durability
- Low resistance, high current contacts are rated at 2 amps continuous, 3 amps peak
- High temperature thermoplastic insulators are suitable for SMT soldering processes
- Both 836 & 838 series, are available on 32mm wide carrier tape and fitted with vacuum pick-up clips for automated pick and place assembly. Tape and Reel packaging per EIA-481
- 836 & 838 series contact strips are designed for manual or automatic placement onto .066" Ø solder pads

SINGLE ROW Series 836

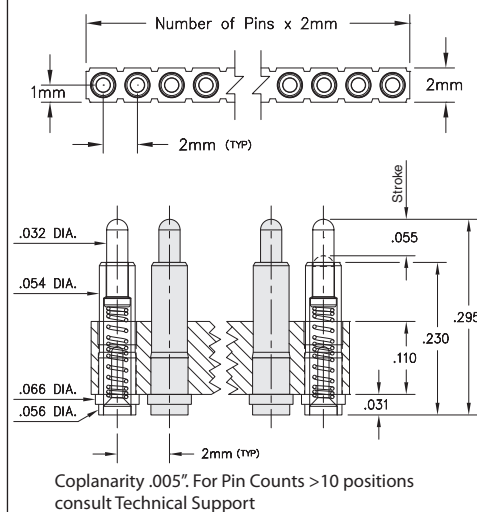

DOUBLE ROW Series 838

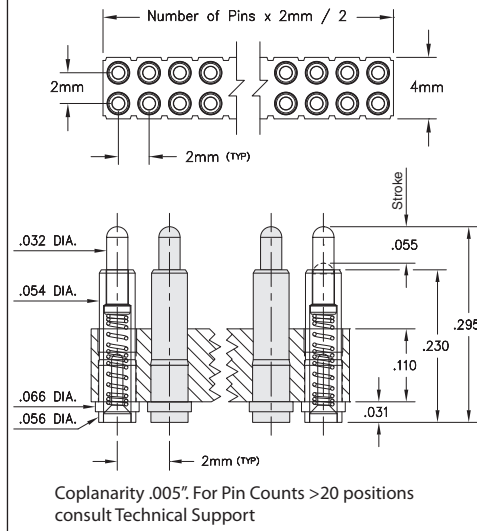

ORDERING INFORMATION

Series 836 (Bulk Packaged)

836-22-0XX-30-001101

Specify number of contacts 02-10

Series 836 (Tape & Reel Packaged, 400 parts per reel)

836-22-0XX-30-001191

Specify number of contacts 02-10

Series 838 (Bulk Packaged)

838-22-0XX-30-001101

Specify number of contacts 04-20

Series 838 (Tape & Reel Packaged, 400 parts per reel)

838-22-0XX-30-001191

Specify number of contacts 04-20

Technical Specifications

Materials:

Contact piston & base: Machined copper alloy plated 20μ" gold over 100μ" nickel
Spring: Stainless Steel-plated 10μ" gold
Insulator: High temperature thermoplastic, rated UL94 V-0

Mechanical:

Spring force @ initial height: 25 grams
Spring force @ mid stroke (.0275"): 60 grams
Durability: Up to 1,000,000 cycles

Electrical:

Voltage rating: 100Vrms/150Vdc
Current rating: 2A (continuous), 3A (peak) per contact
Contact resistance: 20mΩ max.
Insulation resistance: 10,000MΩ min.
Dielectric strength: 700Vrms min.
Capacitance: 1pF max.

RoHS-2
2011/65/EU



Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com