

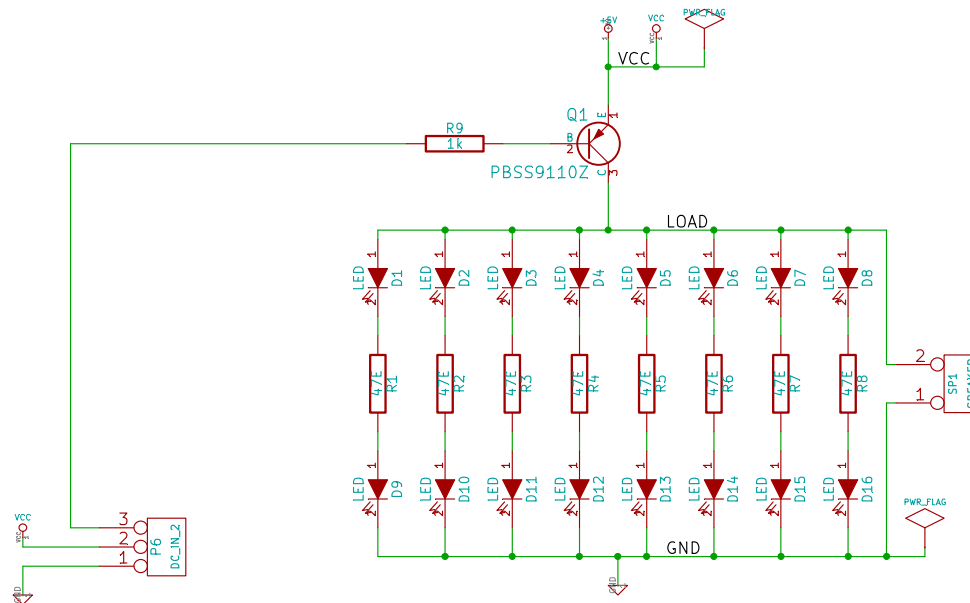


P1
P2
P3
P4
X
X
X
X
Mounting Holes



C3Jr-Name-in-Lights

an array of 16 SMD LEDs driven either via Speaker Transistor on C3Jr using SP1 for control signal and P5/P6 for Power (+5V, GND) OR, by using on board Transistor with Base Resistor, via any other available control pin on the controller.
If using on-board Transistor, Pin 3 of connector P6 gets terminated on Proto Area, and can be red-wired to appropriate control pin.

File: C3Jr_v2_nil.sch		
Sheet: /		
Title:		
Size: A4	Date: 5 may 2012	Rev:
KiCad E.D.A. eeschema (2011-12-28 BZR 3254)-stable		Id: 1/1