


Wyolum

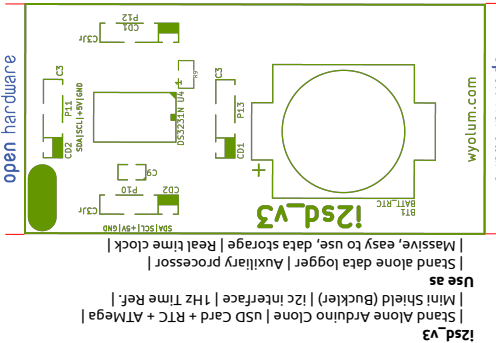


i2sd_v3


Stand Alone Arduino Clone | USD Card + RTC + ATmega | Mini Shield (Buckler) | I2C interface | 1Hz Time Ref. |

Use as




Stand alone data logger | Auxiliary processor | Massive, easy to use, data storage | Real time clock |

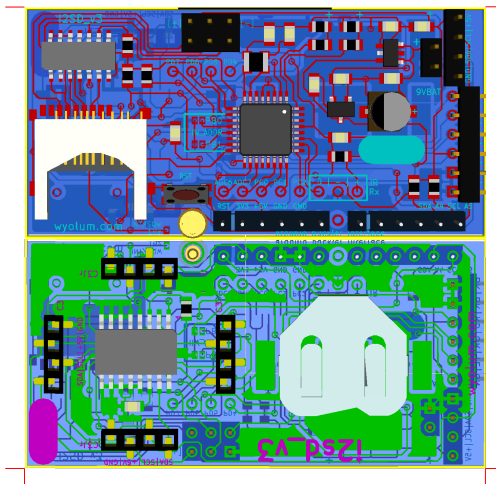



Original 100%

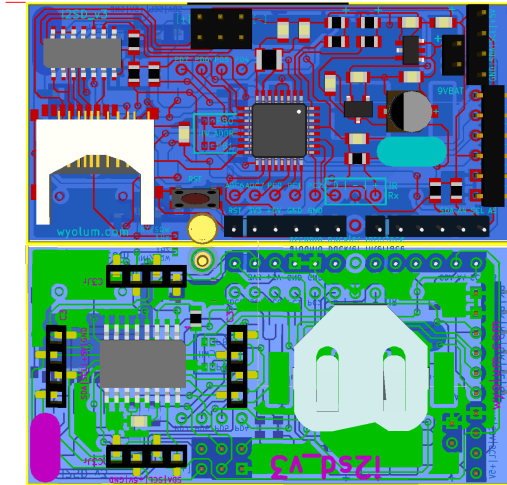

i2sd_v3
| Stand Alone Arduino Clone | i2c interface | 1Hz Time Ref. |
| Mini Shield (Buckler) | i2c interface | 1Hz Time Ref. |
Use as
| Stand alone data logger | Auxiliary processor |
| Massive, easy to use, data storage | Real time clock |

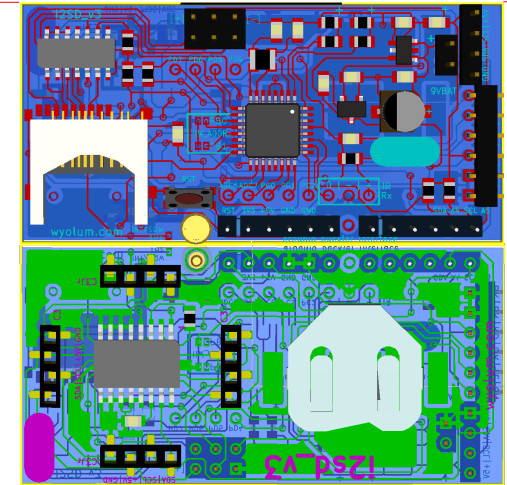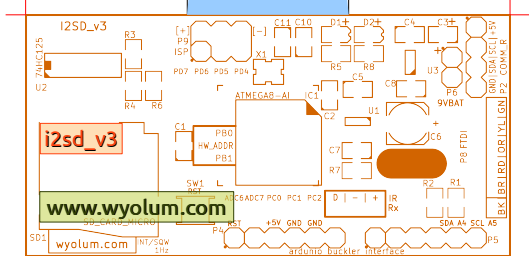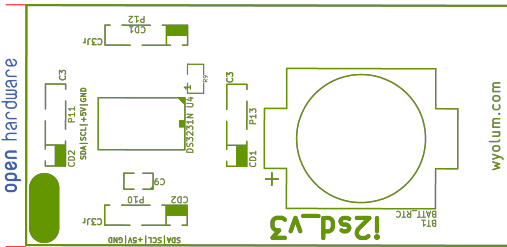

i2sd_v3
| Stand Alone Arduino Clone | i2c interface | 1Hz Time Ref. |
| Mini Shield (Buckler) | i2c interface | 1Hz Time Ref. |
Use as
| Stand alone data logger | Auxiliary processor |
| Massive, easy to use, data storage | Real time clock |

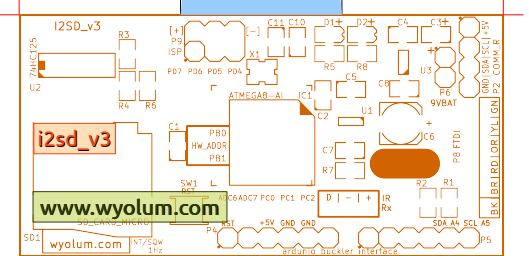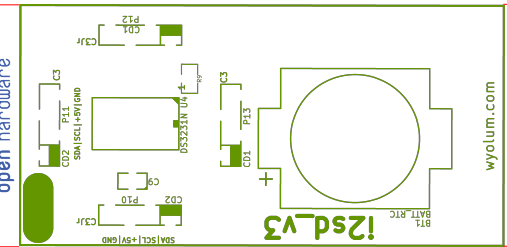

Enlarged by 105%