







these are also used to  
mount the Upper board  
to C3Jr @ Proto area

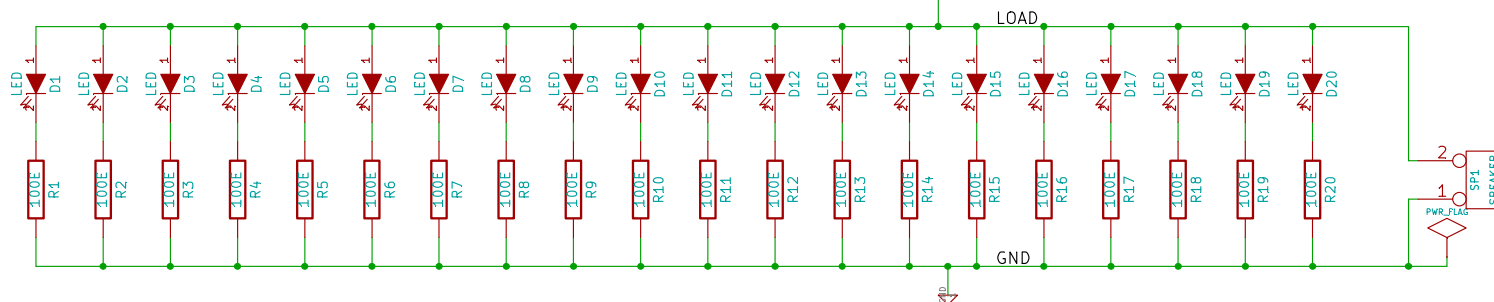

PROTO AREA



### C3Jr-Name-in-Lights

an array of 16 SMD LEDs driven either via Speaker Transistor on C3Jr using SP1 for control signal and P5/P6 for Power (+5V, GND) OR, by using on board Transistor with Base Resistor, via any other available control pin on the controller.  
If using on-board Transistor, Pin 3 of connector P6 gets terminated on Proto Area, and can be red-wired to appropriate control pin.

File: C3Jr\_v2\_nil.sch

Sheet: /

Title:

Size: A4 Date: 28 may 2012

KiCad E.D.A. eeschema (2011-12-28 BZR 3254)-stable

Rev:

Id: 1/1