







SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

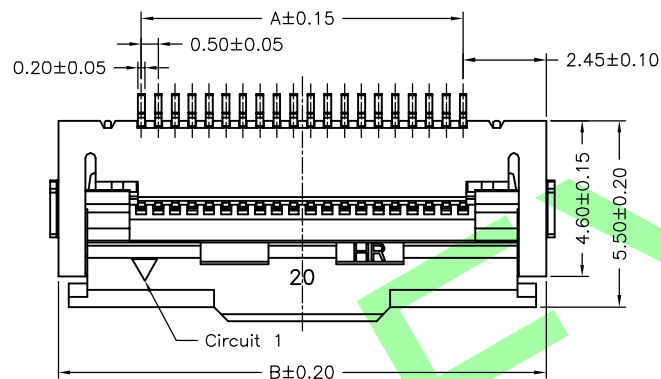

04P~22P



23P~60P

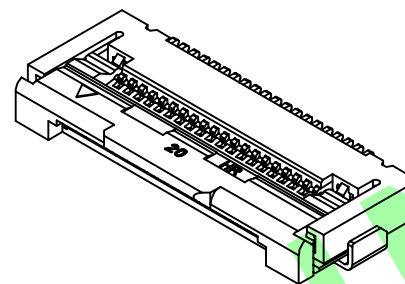


#### SPECIFICATIONS

Current Rating: 0.5A AC,DC  
Voltage Rating: 50V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 30mΩ Max.  
Insulation Resistance: 100MΩ Min.  
Withstanding Voltage: 250V AC/minute  
Contacts: Phosphor Bronze/Tin-plated  
Solder Tabs: Phosphor Bronze/Tin-plated  
Housing: Nylon 6T,UL94V-0,Natural(Beige)  
Cover: Nylon 6T,UL94V-0,Natural(Black)


#### Ordering Information & Dimensions

PART NO.	Dimensions			PART NO.	Dimensions		
	A	B	C		A	B	C
5922-04-0HD1R	1.50	6.40	2.60	5922-26-0HD1R	12.50	17.40	13.60
06	2.50	7.40	3.60	27	13.00	17.90	14.10
07	3.00	7.90	4.10	28	13.50	18.40	14.60
08	3.50	8.40	4.60	29	14.00	18.90	15.10
09	4.00	8.90	5.10	30	14.50	19.40	15.60
10	4.50	9.40	5.60	31	15.00	19.90	16.10
11	5.00	9.90	6.10	32	15.50	20.40	16.60
12	5.50	10.40	6.60	33	16.00	20.90	17.10
13	6.00	10.90	7.10	34	16.50	21.40	17.60
14	6.50	11.40	7.60	35	17.00	21.90	18.10
15	7.00	11.90	8.10	36	17.50	22.40	18.60
16	7.50	12.40	8.60	37	18.00	22.90	19.10
17	8.00	12.90	9.10	38	18.50	23.40	19.60
18	8.50	13.40	9.60	39	19.00	23.90	20.10
19	9.00	13.90	10.10	40	19.50	24.40	20.60
20	9.50	14.40	10.60	42	20.50	25.40	21.60
21	10.00	14.90	11.10	45	22.00	26.90	23.10
22	10.50	15.40	11.60	50	24.50	29.40	25.60
23	11.00	15.90	12.10	55	27.00	31.90	28.10
24	11.50	16.40	12.60	60	29.50	34.40	30.60
25	12.00	16.90	13.10				






联益康电子有限公司 <http://www.leyconn.com>  
TEL:+86(755)26078616

			UNIT		SCALE	SHEET	TITLE: 0.50mm PITCH FFC/FPC CONNECTOR 90° SMT TYPE, ZIF, BOTTOM CONTACT STYLE, BIGGER FITTING NAIL TYPE
			mm			1 of 2	
			DRAWN BY		APPROVED BY		
			董正一 2004.10.15		董正一 2004.10.15		
B2	REVISE	2006.12.06	GENERAL TOLERANCE				DRAW NO.: 5922XX0HD1R
B1	REVISE	2006.12.04	X.X±0.25		ANGLE±		
B0	NEW RELEASE	2006.04.21	X.XX±0.15				
REV.	DESCRIPTION	DATE	X.XXX±0.05				
							REV. B3


## 6~23 Contacts

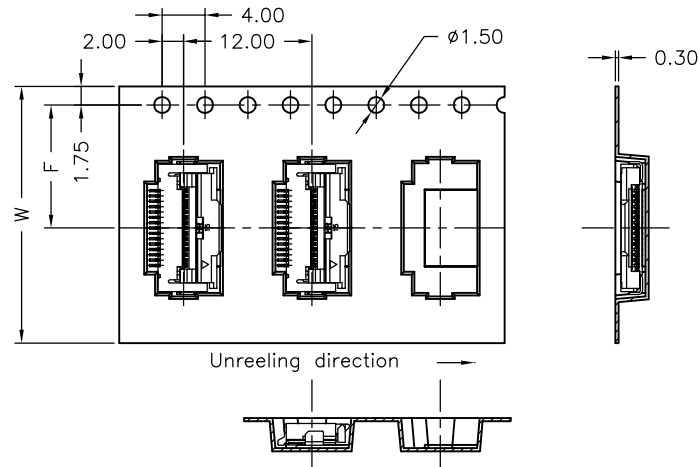

## 24~50 Contacts

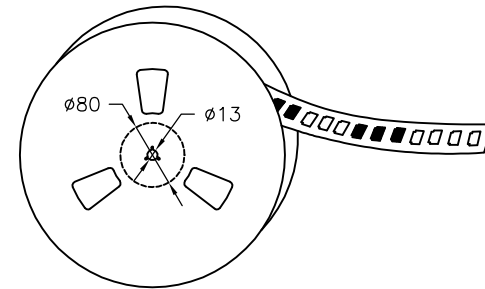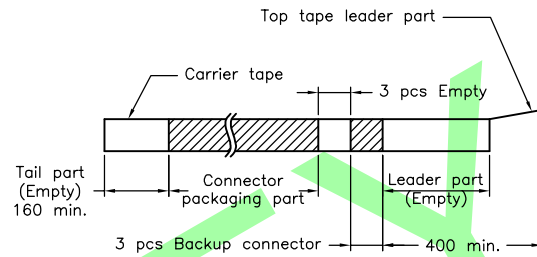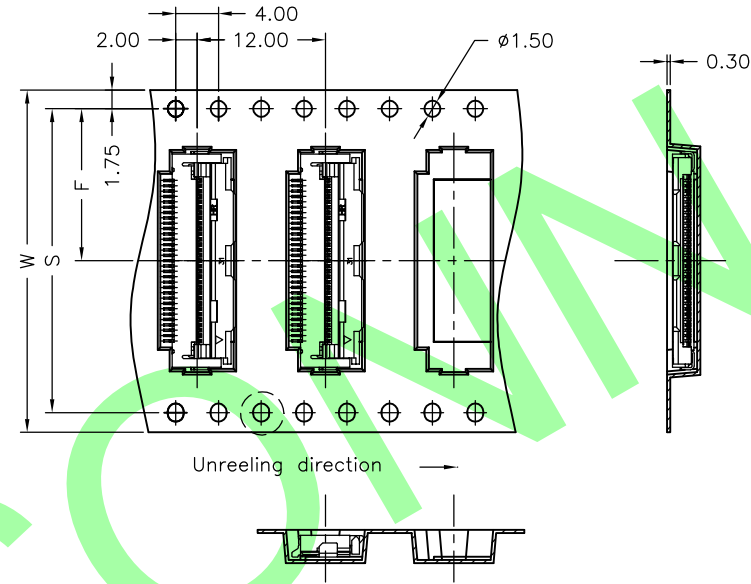

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel	Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
04P	16	7.50		1,000	26P	32	14.20	28.40	1,000
06P	16	7.50		1,000	27P	32	14.20	28.40	1,000
07P	16	7.50		1,000	28P	32	14.20	28.40	1,000
08P	16	7.50		1,000	29P	32	14.20	28.40	1,000
09P	24	11.50		1,000	30P	32	14.20	28.40	1,000
10P	24	11.50		1,000	31P	32	14.20	28.40	1,000
11P	24	11.50		1,000	32P	32	14.20	28.40	1,000
12P	24	11.50		1,000	33P	32	14.20	28.40	1,000
13P	24	11.50		1,000	34P	32	14.20	28.40	1,000
14P	24	11.50		1,000	35P	44	20.20	40.40	1,000
15P	24	11.50		1,000	36P	44	20.20	40.40	1,000
16P	24	11.50		1,000	37P	44	20.20	40.40	1,000
17P	24	11.50		1,000	38P	44	20.20	40.40	1,000
18P	24	11.50		1,000	39P	44	20.20	40.40	1,000
19P	24	11.50		1,000	40P	44	20.20	40.40	1,000
20P	24	11.50		1,000	42P	44	20.20	40.40	1,000
21P	24	11.50		1,000	45P	44	20.20	40.40	1,000
22P	24	11.50		1,000	50P	44	20.20	40.40	1,000
23P	24	11.50		1,000	55P	44	20.20	40.40	1,000
24P	32	14.20	28.40	1,000	60P	56	26.20	52.40	1,000
25P	32	14.20	28.40	1,000					

			联益康电子有限公司			http://www.leyconn.com	
						TEL:+86(755)26078616	
			UNIT	SCALE	SHEET	TITLE: 0.50mm PITCH FFC/FPC CONNECTOR, 90° SMT TYPE, ZIF, BOTTOM CONTACT STYLE, TAPING SPEC.	
			mm		2 of 2		
			DRAWN BY		APPROVED BY		
			董正一		董正一		
			2004. 10. 19		2004. 10. 19		
			GENERAL TOLERANCE				
B1	REVISE	2006. 12. 04	X. X±0. 25		ANGLE± 		
B0	NEW RELEASE	2006. 04. 21	X. XX±0. 15				
REV.	DESCRIPTION	DATE	X. XXX±0. 05		DRAW NO. : 5922XX0HD0R		
							REV. B1