





NOTE :
3V3 regulator is not installed by default.
Badge runs off 3V3 coin battery.
H1 and H2 OR P5 allow lanyard wires to connect to external battery.

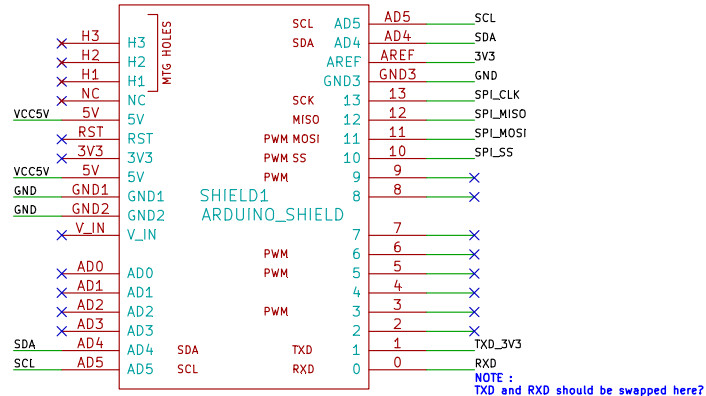

NOTE : Do we want to connect 3V3 between Arduino shield header and rest of circuit ? Could cause problem if 3V3 BATT is also connected at the same time.

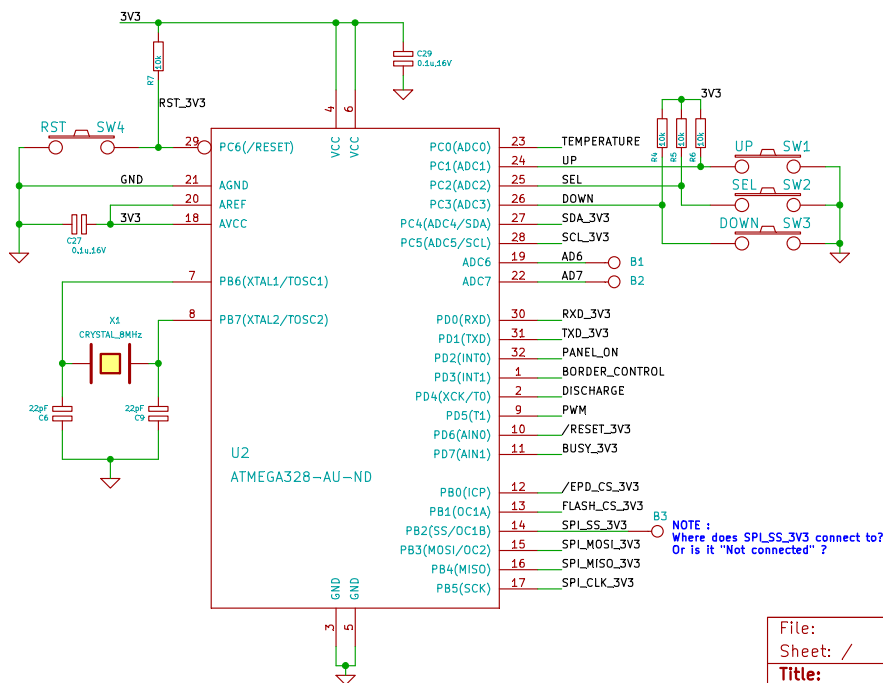

NOTE :
3V3 operation requires 8MHz resonator – please confirm

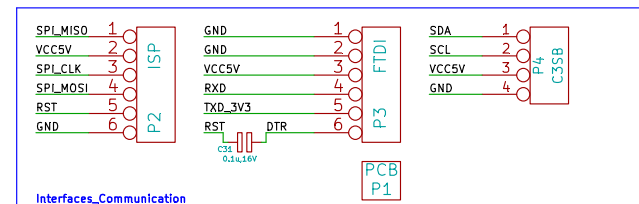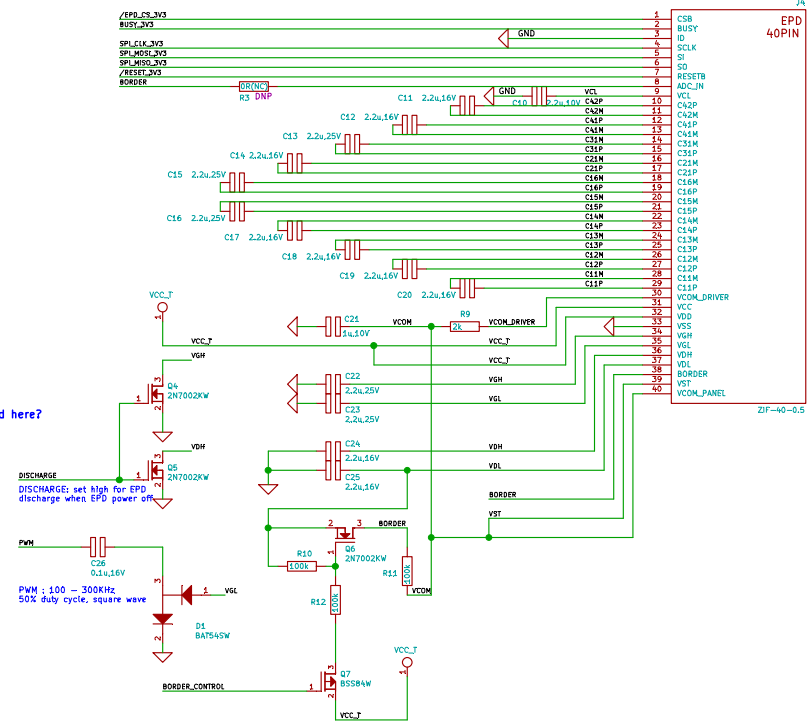

File:

Sheet: /

Title:

Size: A4

KiCad E.

Date: 6 apr 2013

schema (2013-03-15 BZR 4003)-stable

Rev:

Id: 1/1