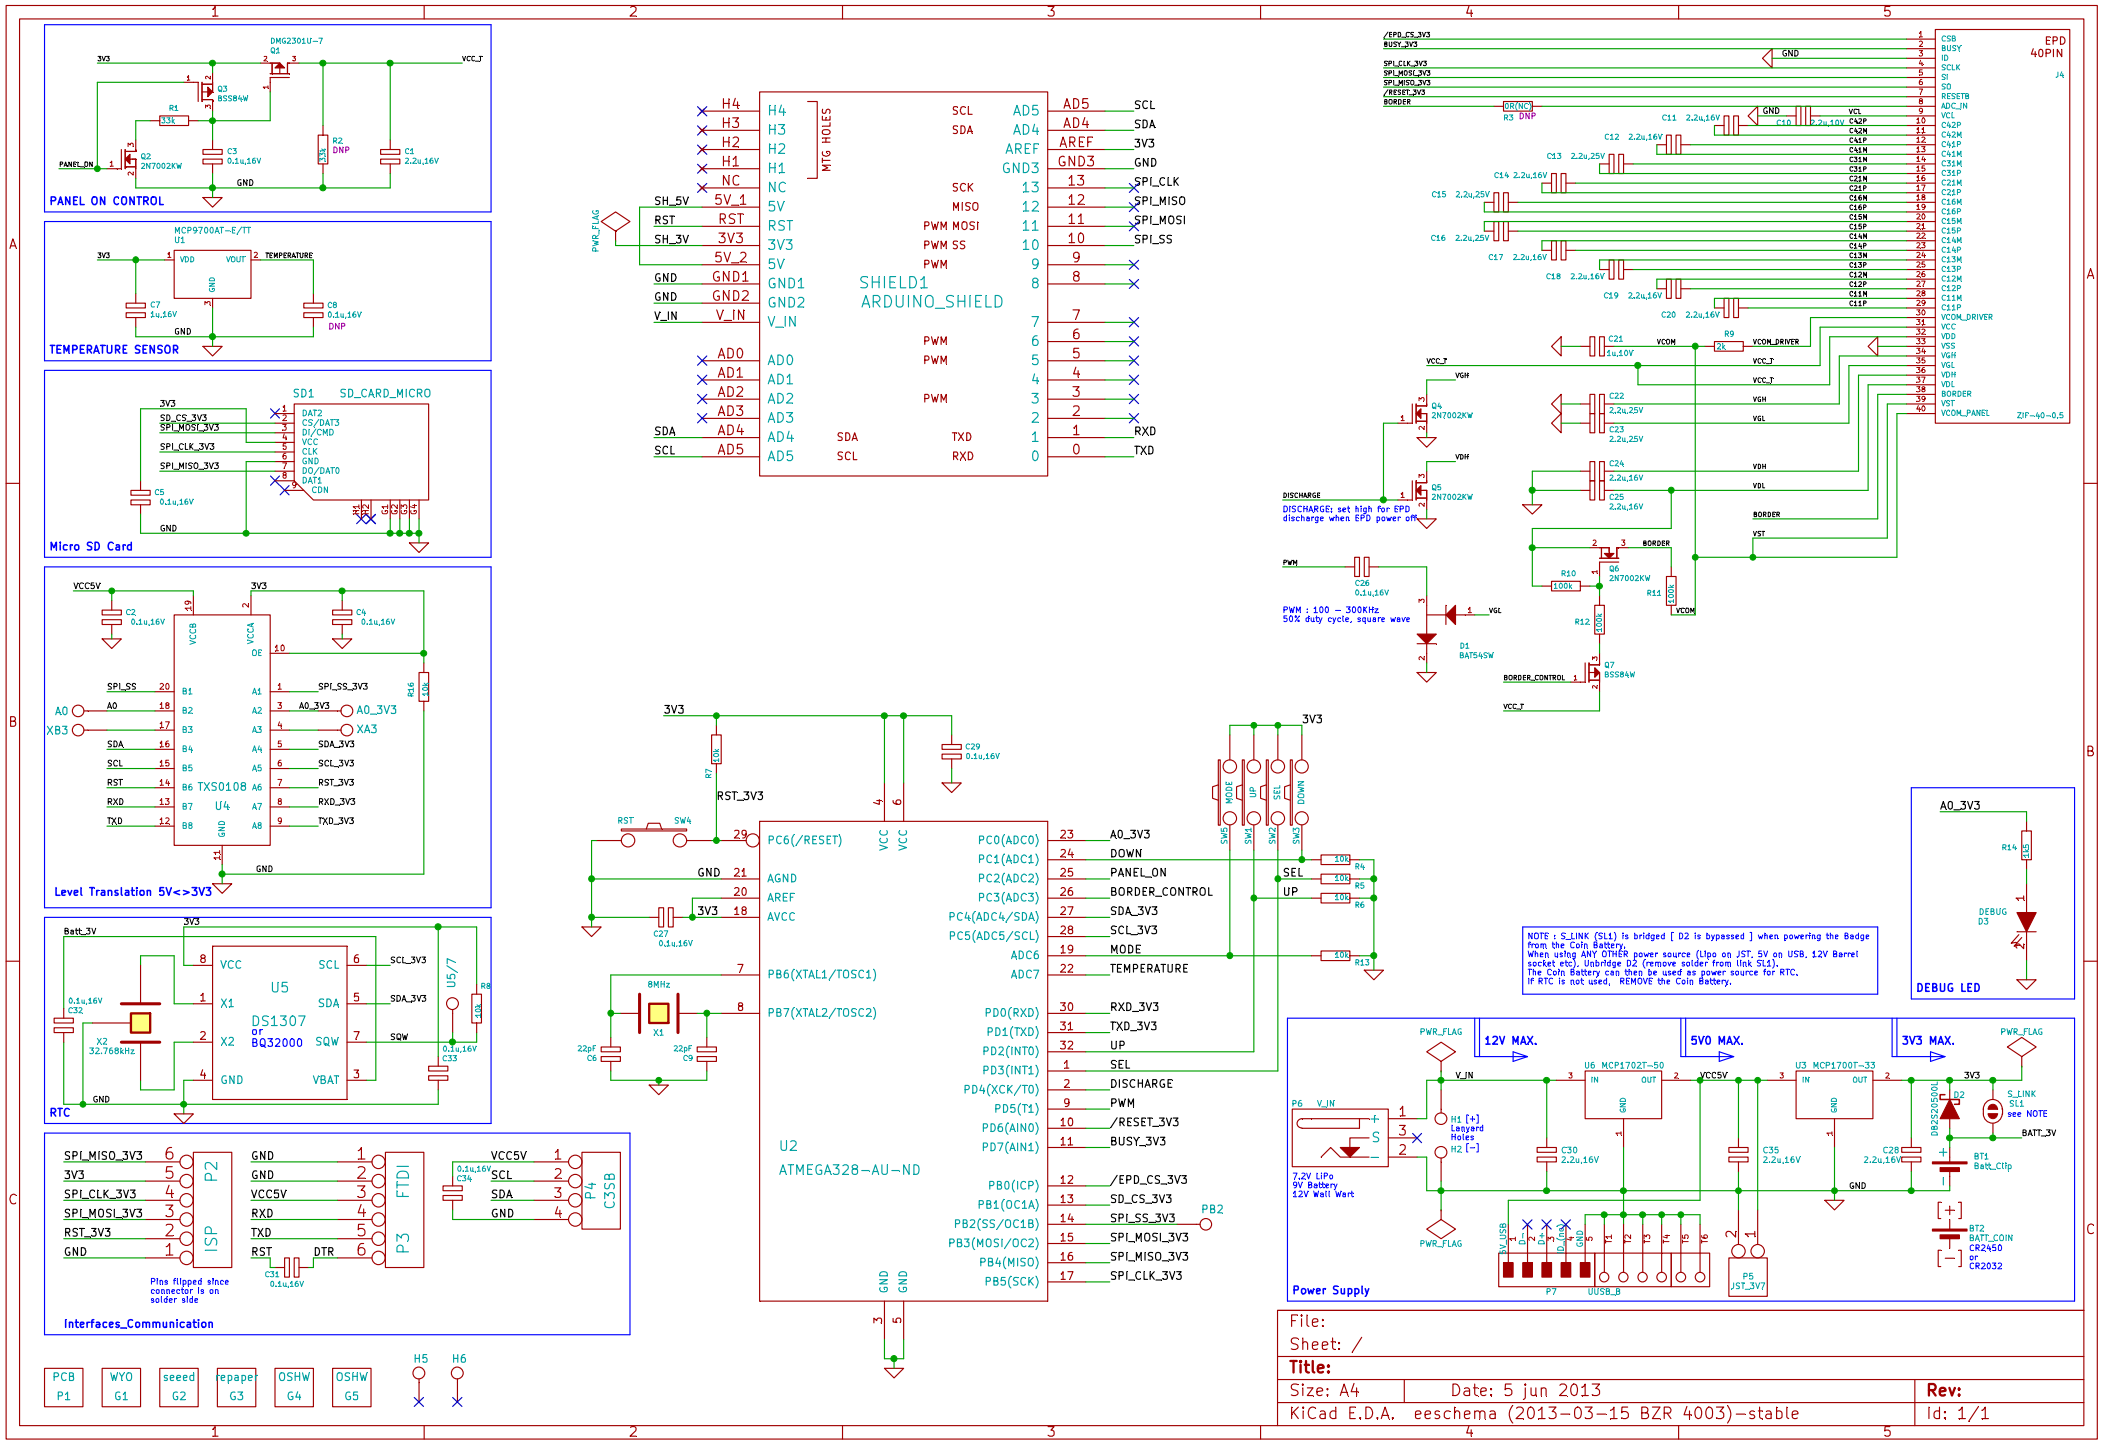
PANEL ON CONTROL
TEMPERATURE SENSOR
Micro SD Card
Level Translation 5V<>3V3
RTC
Interfaces_Communication
SHIELD1
ARDUINO_SHIELD
EPD 40PIN
U2
ATMEGA328-AU-ND
Power Supply
DEBUG LED
12V MAX.
5V0 MAX.
3V3 MAX.
NOTE : S_LINK (SL1) is bridged [D2 is bypassed] when powering the Badge from the Coin Battery.
When using ANY OTHER power source (LiPo on JST, 5V on USB, 12V Barrel socket etc), Unbridge D2 (remove solder from link SL1).
The Coin Battery can then be used as power source for RTC.
If RTC is not used, REMOVE the Coin Battery.
File:
Sheet: /
Title:
Size: A4
Date: 5 jun 2013
Rev:
KiCad E.D.A. eeschema (2013-03-15 BZR 4003)-stable
Id: 1/1