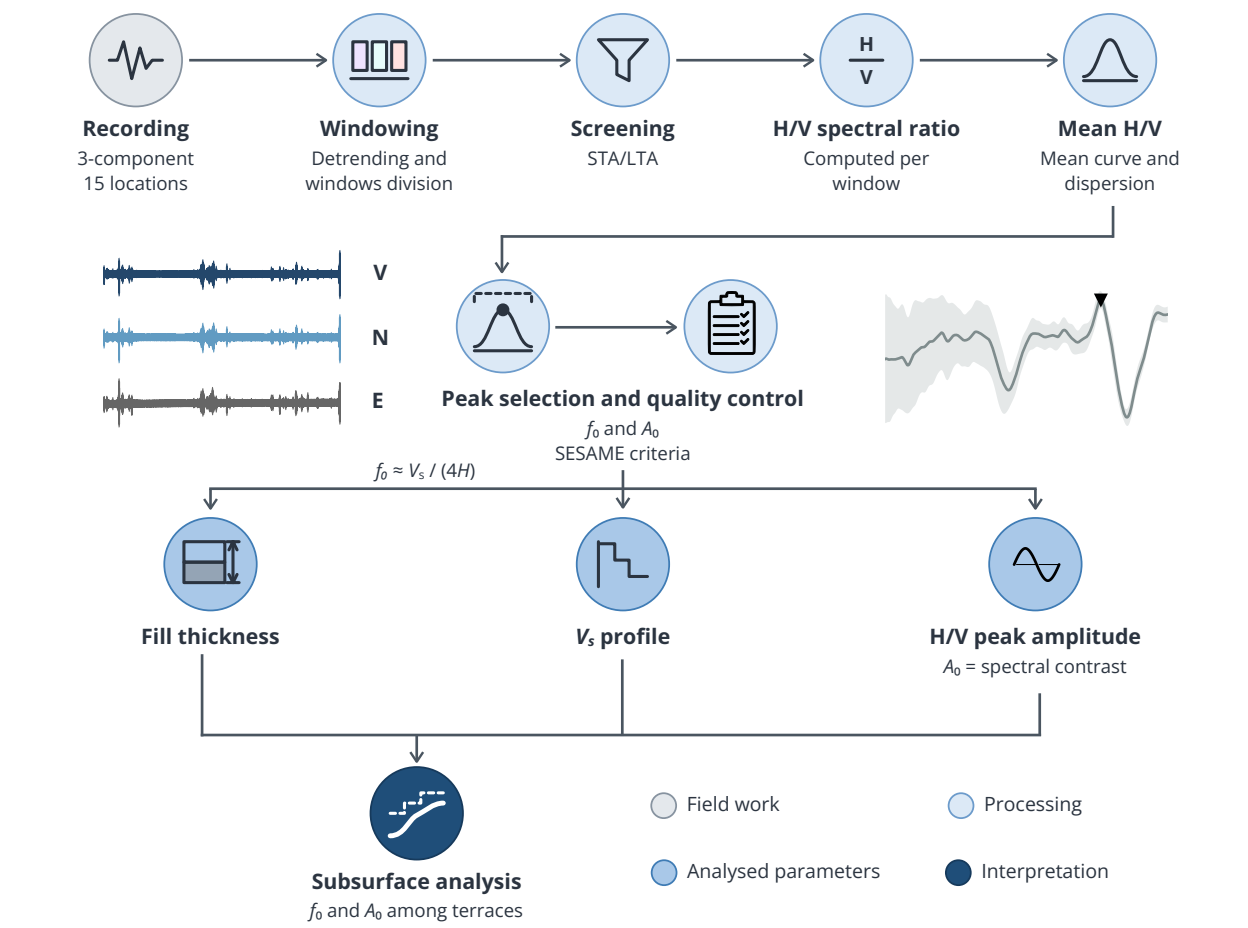

Recording
3-component
15 locations
Windowing
Detrending and
windows division
Screening
STA/LTA
H
V
H/V spectral ratio
Computed per
window
Mean H/V
Mean curve and
dispersion
V
N
E
Peak selection and quality control
f_0 and A_0
SESAME criteria
$f_0 \approx V_s / (4H)$
Fill thickness
V_s profile
H/V peak amplitude
A_0 = spectral contrast
Subsurface analysis
f_0 and A_0 among terraces
Field work
Processing
Analysed parameters
Interpretation