

PRODUCT PARAMETERS •


Item Name	MF5010	
Turns	10	35
Rated Voltage (V)	16	16
Max Speed (rpm)	3050	870
Rated Torque (N.m)	0.26	0.24
Rated Speed (rpm)	2400	440
Rated Current (A)	5.06	1.35
Max Power (W)	128	12
Max Torque (N.m)	0.4	0.53
Speed Constant (rpm/V)	150	27.5
Torque Constant (N.m/A)	0.05	0.18
Winding Type	Y	Y
Line Resistance (Ω)	0.33	3.2
Phase Inductance (mH)	0.13	1.2
Motor Poles	28	
Rotor Inertia (gcm ²)	202	
Motor Temperature	YES	
Bearing Rated Load (N)	153	
Motor Weight (g)	137	

Recommand Drive

DF40

Drive Input Voltage (V)	7.4~32
Communication	RS485 Or CAN
Communication Frequency (Hz)	RS485: 500Hz (115200bps) /CAN:2KHz(1Mbps)
Encoder	18bit Magnetic Encoder
Baudrate (RS485) (bps)	9600、19200、57600、115200、230400、406800、1M、2M
Baudrate (CAN) (bps)	100K、125K、250K、500K、1M
Control Mode	Torque Loop(24KHz) /Speed Loop(8KHz) /Position Loop(8KHz)
Acceleration Curve	Trapeziod acceleration

INSTALLATION DRAWING •

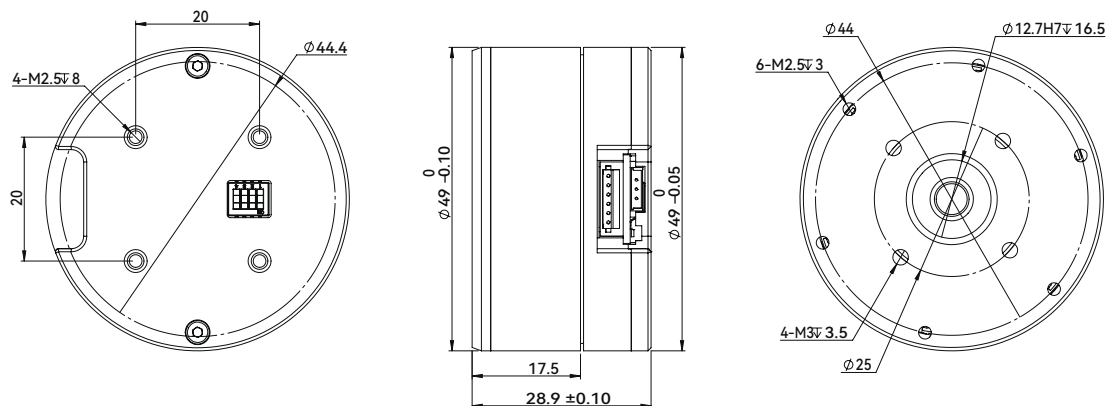

MOTOR CHARACTERISTIC CURVE •

— Inputdc Current — Efficiency — Output Power — Output Torque

