University of Glasgow | School of Engineering

Project Supervisor: Daniel Mitchell
Project Director: Dr David Flynn

Presented by: Oscar Meunier

Reducing Human intervention using Extended reality

Objectives

- Develop a HoloLens-based application for intuitive teleoperation of the Jackal robot.
- Train and assist inspection and maintenance tasks using knowledge of the digital representation and sensor data.
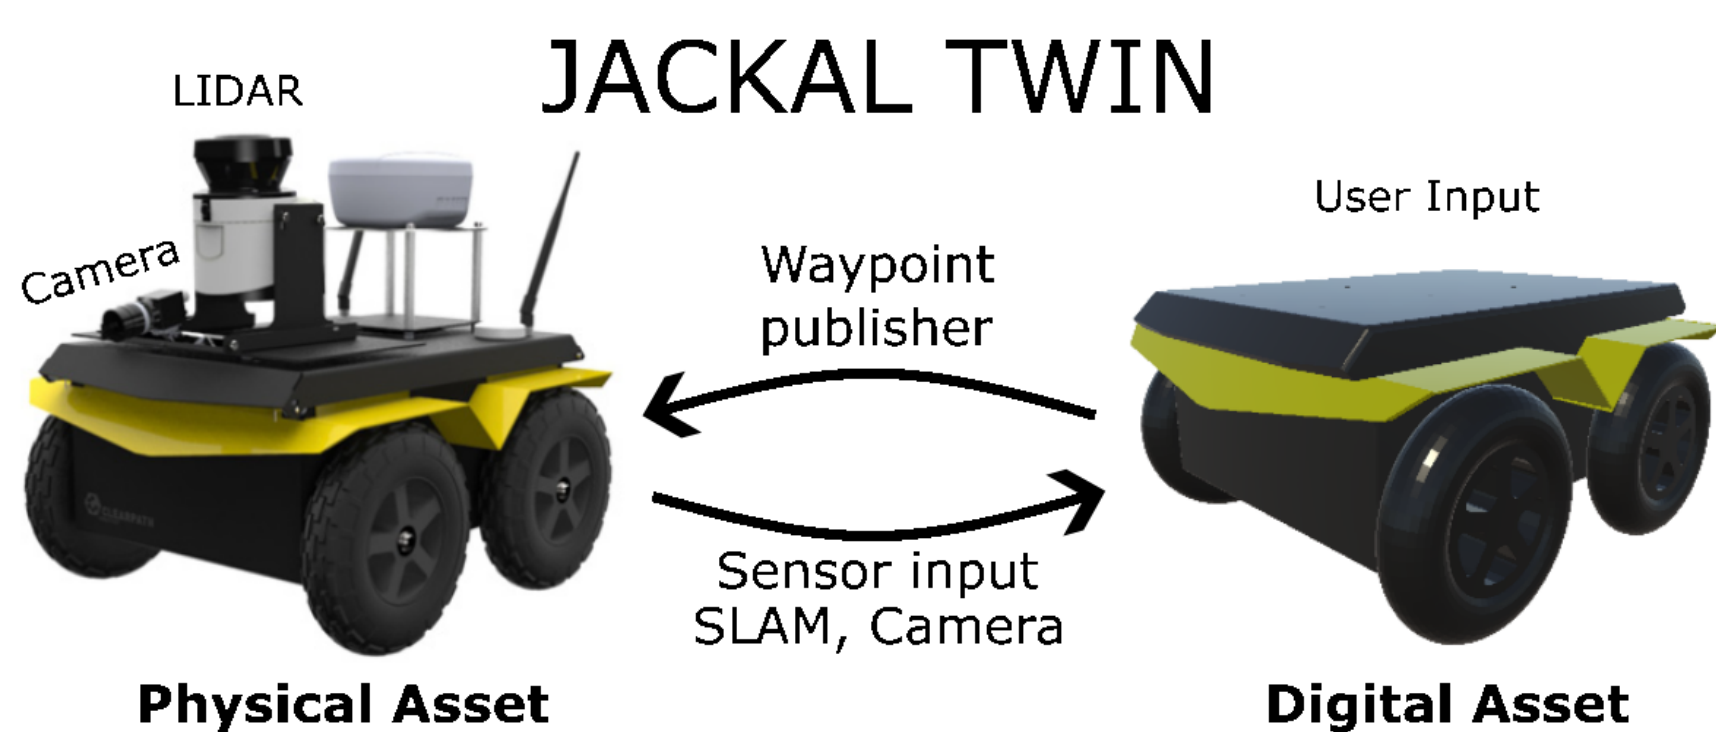
HoloLens 2

Introduction & Background

Inspection and maintenance of critical infrastructures, such as **offshore windfarms** and **nuclear** facilities, can pose significant risks and high costs.

Digital Twin (DT): A virtual replica of a physical asset or system, used to optimize and understand its physical counterpart.

JACKAL TWIN

LIDAR
Camera
Waypoint publisher
User Input

Sensor input
SLAM, Camera

Physical Asset   **Digital Asset**

Reality-Virtuality (RV) Continuum: The varying levels of immersion in virtual environments, spanning from real-world experiences to fully virtual ones:

- **Extent of World Knowledge (EWK):** Captured from **sensors.**
- **Coherence:** The emulation of the **digital world.**
- **Immersion:** Stage of the RV continuum.

Digital twin of **autonomous robots** and **facility** in combination with **XR** is advantageous for inspection and training:

Inspection:

💲 **Economical:** No transport cost with remote inspections.

⚡ **Effective:** One operator can control multiple robots at once.

⚠️ **Failure Prevention:** EWK and coherence can predict errors.

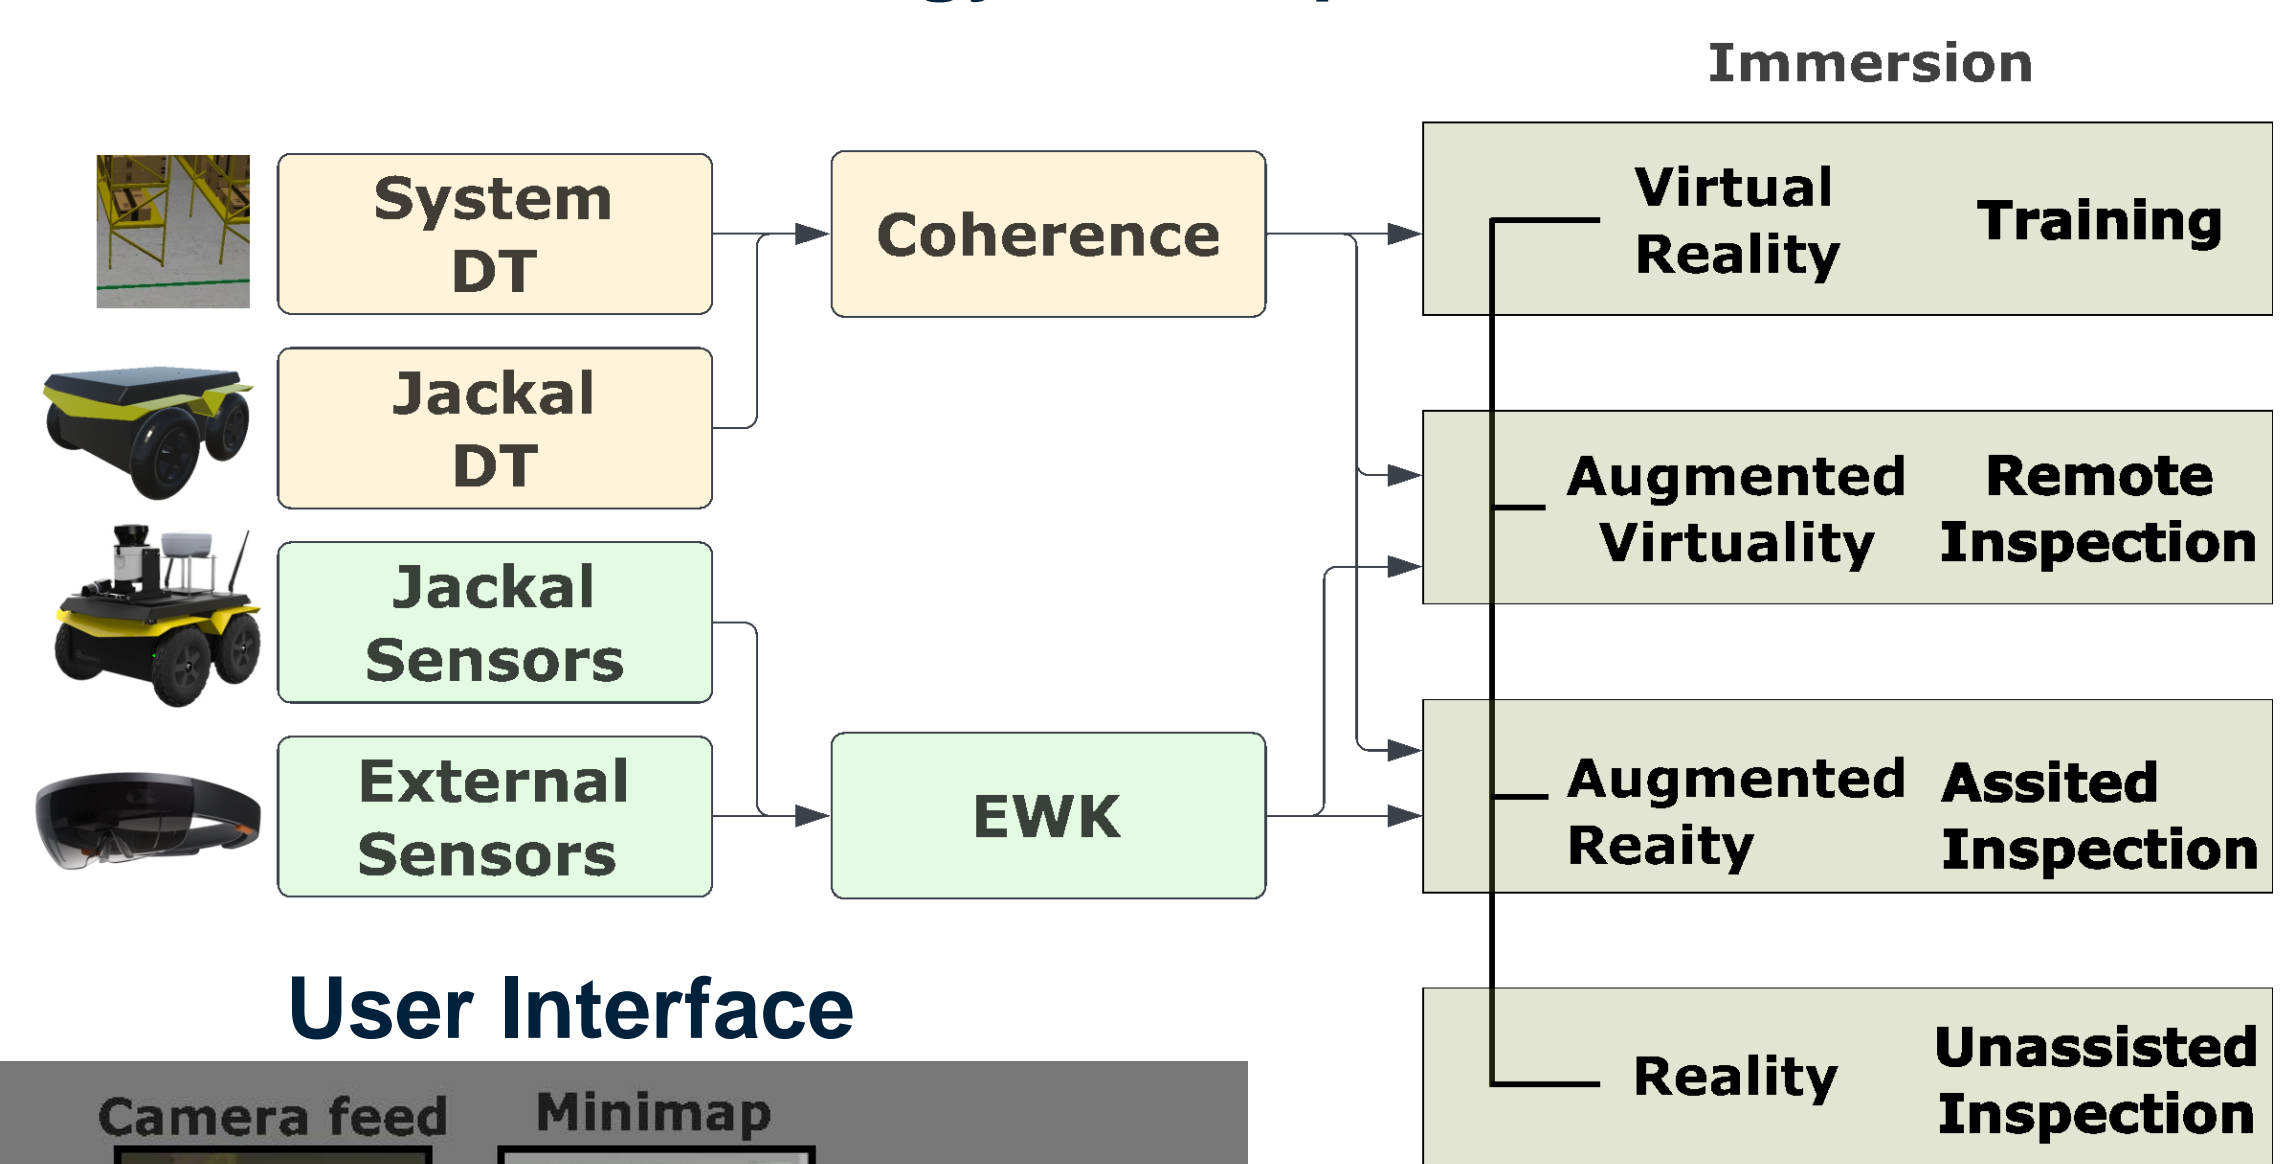👷 **Assisted Inspection:** Useful information provided to user.

Training

🏊 **Immersive:** Engaging and realistic training environments that can help learners better understand and retain information.

🛡️ **Safe and Controlled:** Risk-free virtual environment.

⚙️ **Adaptability:** Adjustable difficulty.
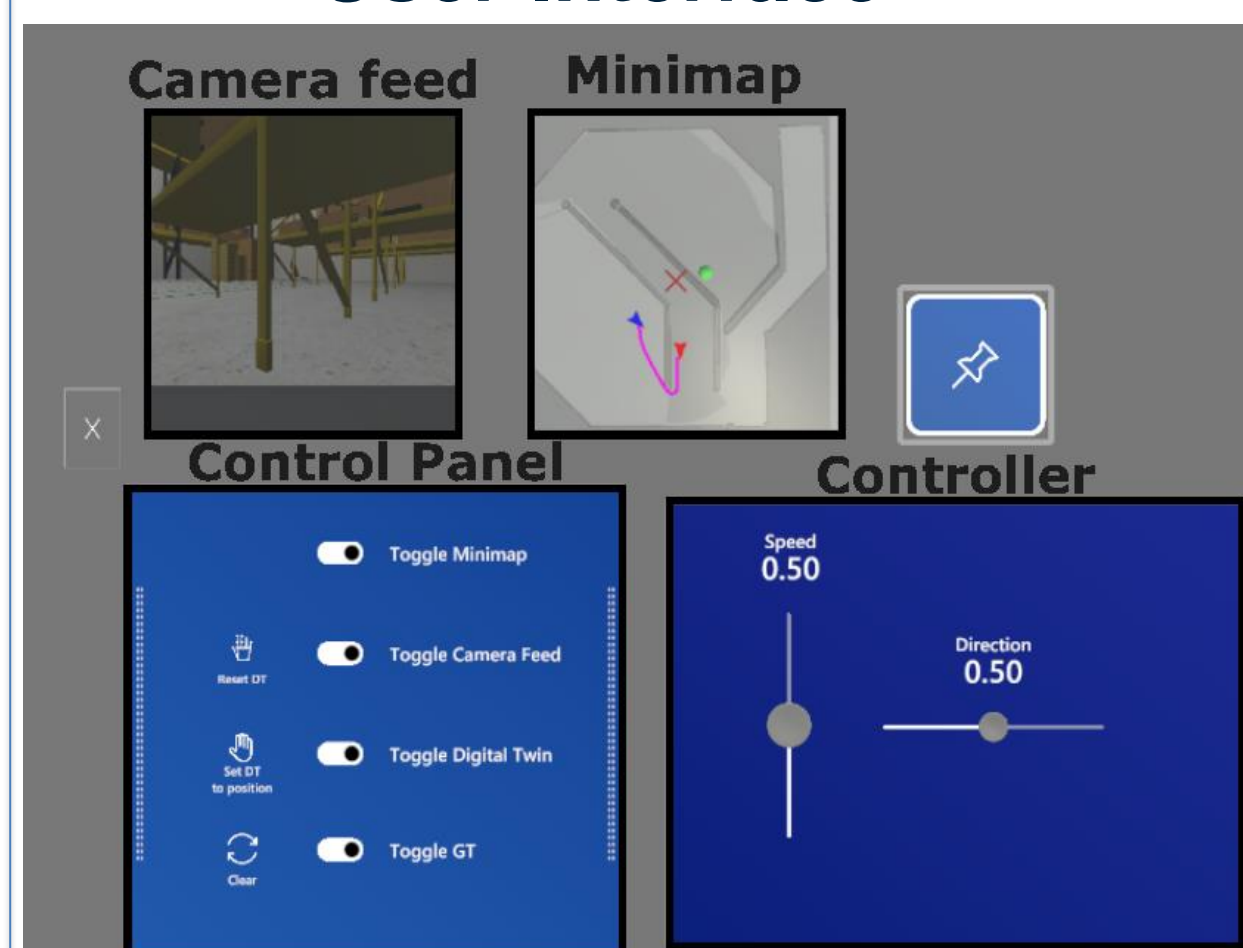
💲 **Cost-effective:** Expensive equipment not required.

Methodology and Implementation

Immersion

System DT	Coherence	Virtual Reality — Training
Jackal DT		
Jackal Sensors	EWK	Augmented Virtuality — Remote Inspection
External Sensors		Augmented Reaity — Assited Inspection
		Reality — Unassisted Inspection

User Interface

Camera feed   Minimap

Control Panel   Controller

- Toggle Minimap
- Toggle Camera Feed
- Toggle Digital Twin
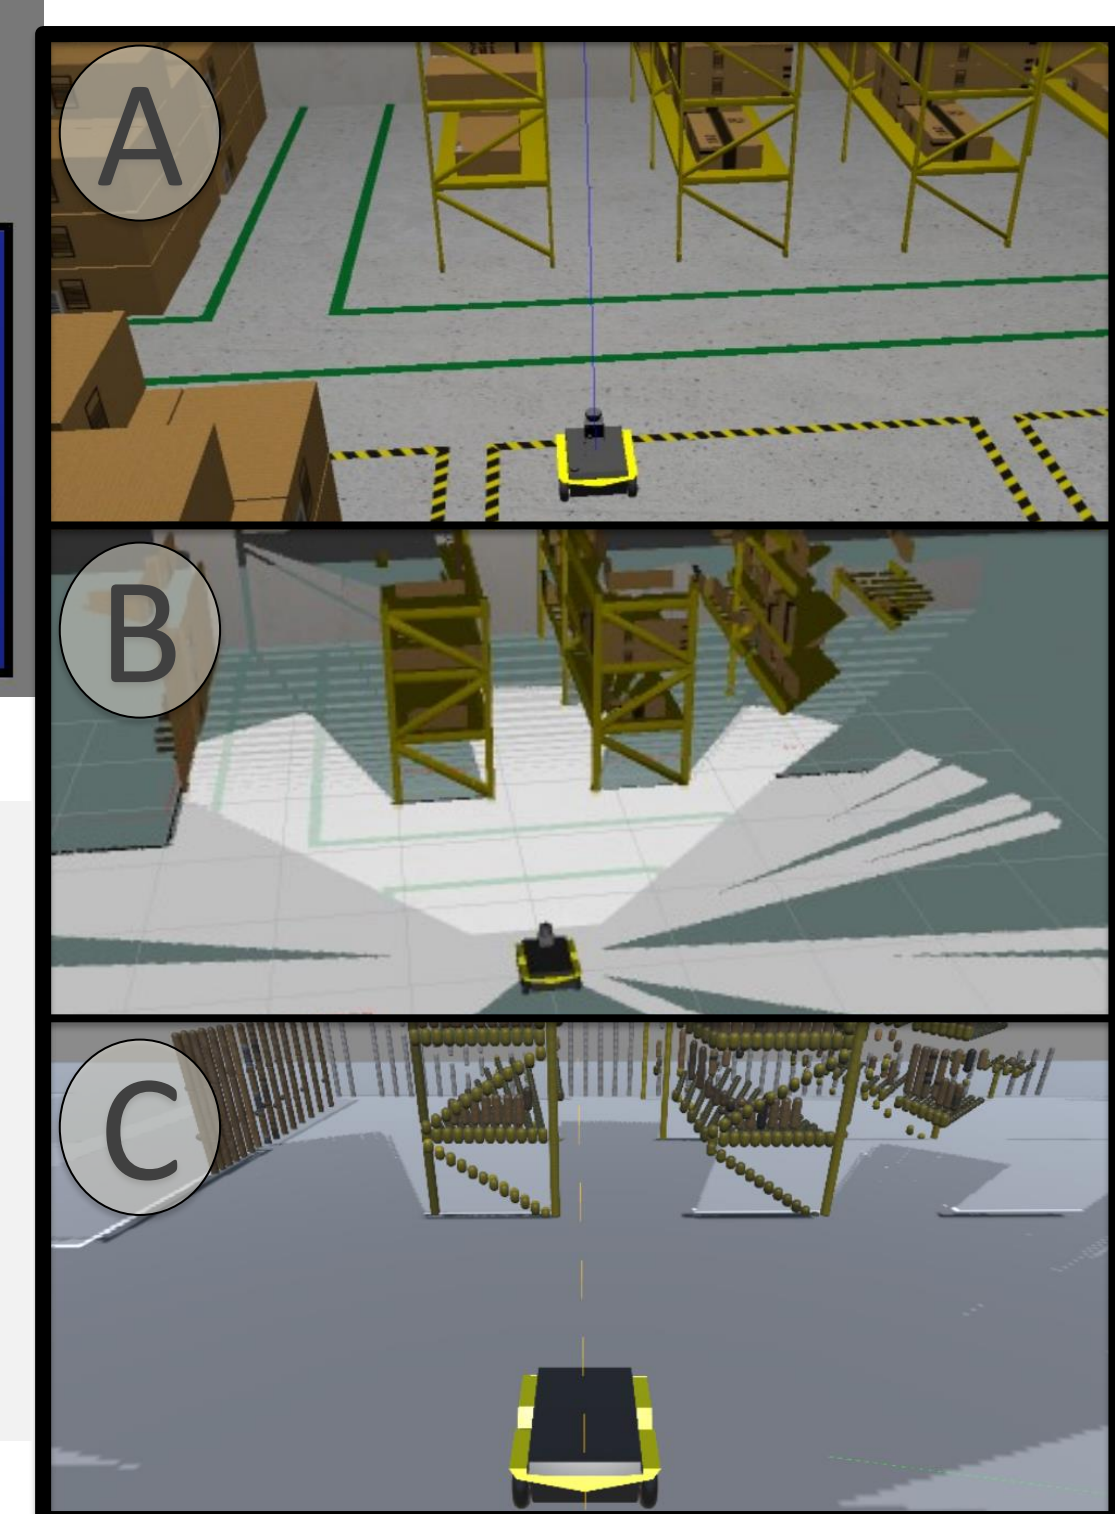- Toggle GT

Speed 0.50
Direction 0.50

The robot is set into the environment, real or simulated **(A)**.

The sensor data is collected by the robot **(B)** and the HoloLens.

This information is aggregated into the AR environment **(C)**.

Views

A

B

C

Conclusion

The HoloLens application provided an immersive, safe, and controlled environment for training purposes.

Assisted inspection tasks were made possible by using sensor data and a digital twin representation.

Results

➕ Successfully **visualized Sensor data** in AR environment.

➕ Successfully **controlled Jackal robot** using HoloLens as input.

Future Work

➕ **Generating a DT of facility** from stereo camera and 3D Lidar.

➕ **Increased robustness** in control strategy as hand tracking can be unreliable.

➕ **Controlling multiple Robots** at once using top level control of a robot fleet.