

# **Haptic Experience Design**

## **Tools, Techniques, and Process**

by

Oliver Stirling Schneider

B.Sc. Honours, University of Saskatchewan, 2010

M.Sc., The University of British Columbia, 2012

A THESIS SUBMITTED IN PARTIAL FULFILLMENT  
OF THE REQUIREMENTS FOR THE DEGREE OF

**Doctor of Philosophy**

in

THE FACULTY OF GRADUATE AND POSTDOCTORAL  
STUDIES  
(Computer Science)

The University Of British Columbia  
(Vancouver)

October 2016

© Oliver Stirling Schneider, 2016

# Abstract

Haptic technology, which engages the sense of touch, offers promising benefits for a variety of interactions including low-attention displays, emotionally-aware interfaces, and augmented media experiences. Despite an increasing presence of physical devices in commercial and research applications, there is still little support for the design of engaging haptic sensations. Previous literature has focused on the significant challenges of technological capabilities or physical realism rather than on supporting experience design.

In this dissertation, we study how to design, build, and evaluate interactive software to support haptic experience design (HaXD). We define HaXD and iteratively design three vibrotactile effect authoring tools, each a case study covering a different user population, vibrotactile device, and design challenge, and use them to observe specific aspects of HaXD with their target users. We make these in-depth findings more robust in two ways: generalizing results to a breadth of use cases with focused design projects, and grounding them with expert haptic designers through interviews and a workshop. Our findings 1) describe HaXD, including processes, strategies, and challenges; and 2) present guidelines on designing, building, and evaluating interactive software that facilitates HaXD.

When characterizing HaXD processes, strategies, and challenges, we show that experience design is already practiced with haptic technology, but faces unique considerations compared to other modalities. We identify four design activities that must be explicitly supported: *sketching*, *refining*, *browsing*, and *sharing*. We find and develop strategies to accommodate the wide variety of haptic devices. We articulate approaches for designing meaning with haptic experiences, and finally, highlight a need for supporting adaptable interfaces.

When informing the design, implementation, and evaluation of HaXD tools, we discover critical features, including a need for improved online deployment and community support. We present steps to develop both existing and future research software into a mature suite of HaXD tools, and reflect upon evaluation methods. By characterizing HaXD and informing supportive tools, we make a first step towards establishing HaXD as its own field, akin to graphic and sound design.

# Preface

No creative work **owes to** a lone individual; this dissertation is no exception. All of the projects described in this work are collaborative efforts in at least some capacity. Even where the author contributed all work, there was often informal feedback from friends, family, and colleagues. As such, this dissertation will use the first-person plural, “we”, throughout. In this preface, we clarify the author’s contribution to the work, much of which has been published.

In Chapters 1, 2, and 9, Oliver contributed writing and framing, with feedback provided by the supervisor (Dr. Karon MacLean) and supervisory committee (Drs. Ronald Garcia and Michiel van de Panne) throughout his PhD program. Some of this thinking (Figure 1.1, the *sketch/refine/browse/share* design activities, and some of Chapter 9) is combined with a handbook chapter currently in press, written with Dr. MacLean as lead author, and Oliver and PhD candidate Hasti Seifi as co-authors. This chapter is aimed as an advanced (*i.e.*, graduate or senior undergraduate) educational resource incorporating Oliver and Hasti’s research.

In Chapter 3, Oliver contributed all work and ideas, with feedback and guidance from Dr. MacLean. The software has been released as an open-source project at <https://github.com/ubcspin/mHIVE>. This work has been published as full conference paper with an associated demo at HAPTICS’14, and at a workshop at CHI’14:

Schneider and MacLean. (2014) *Improvising Design with a Haptic Instrument*. HAPTICS ’14.

Schneider and MacLean. (2014) *mHIVE: A WYFIWIF design tool*. HAPTICS ’14 Demos.

Schneider and MacLean. (2014) *Reflections on a WYFIWIF Design Tool*. Workshop on Tactile User Experience Evaluation Methods at CHI '14.

In Chapter 4, Oliver contributed most work and ideas, with initial interviews with designers and haptic experts conducted by Disney Research. This work was conducted while on internship at Disney Research Pittsburgh, with some supplementary work done at UBC. Dr. Ali Israr supervised Oliver's internship; Oliver led writing with feedback and guidance from Drs. Israr and MacLean. This work was presented by Oliver at UIST'15 with an associated demo:

Schneider, Israr, and MacLean. (2015) *Tactile Animation by Direct Manipulation of Grid Displays*. UIST '15.

Schneider, Israr, and MacLean. (2015) *Tactile Animation by Direct Manipulation of Grid Displays*. UIST '15 Demos.

In Chapter 5, Oliver contributed all work and ideas, with feedback and guidance from Dr. MacLean. Macaron has been released as an open-source project at <https://github.com/ubcspin/Macaron> and is available online at <http://hapticdesign.github.io/macaron>. Subsequent development of the core Macaron tool and extension MacaronMix includes work by Matthew Chun, Benson Li, Ben Clark, and Paul Bucci. The study reported in Chapter 5 was presented by Oliver at HAPTICS'16 with an associated demo:

Schneider and MacLean. (2016) *Studying Design Process and Example Use with Macaron, a Web-based Vibrotactile Effect Editor*. HAPTICS '16.

Schneider and MacLean. (2016) *Macaron: An Online, Open-Source, Haptic Editor*. HAPTICS '16 Demos (finalist for best demo).

In Chapter 6, Oliver was part of a collaborative team together with Hasti Seifi, undergraduate summer student Matthew Chun, and master's student Salma Kashani, all supervised by Dr. MacLean. Oliver and Hasti planned and managed the project,

with Matthew and Salma doing proxy design, study design, and data collection for low-fidelity proxies and visual proxies respectively. Oliver led paper writing and quantitative analysis, working closely with the other authors, and presented the work at CHI'16:

Schneider, Seifi, Kashani, Chun, and MacLean. (2016) *HapTurk: Crowdsourcing Affective Ratings for Vibrotactile Icons*. CHI '16.

Chapter 7 describes several focused projects to give this dissertation improved breadth. Oliver played different roles depending on the project.

**Section 7.1, FeelCraft** Oliver worked closely with Siyan Zhao, supervised by Dr. Israr at Disney Research Pittsburgh. Oliver implemented the rendering system (co-developed with the engine described in Chapter 4), developed the MineCraft plugin and connection architecture, and wrote the AsiaHaptics paper (archived in LNEE 277) with feedback from Ali Israr. Artistic contributions to the video were made by Kyna McIntosh and Madeleine Varner. Oliver and Siyan together designed the implemented feel effects (Oliver led implementation), planned, shot, and edited the video submissions (Siyan led editing); each presented the demo once (Oliver at AsiaHaptics 2014, Siyan at UIST 2014):

Schneider, Zhao, and Israr. (2015) *FeelCraft: User-Crafted Tactile Content*. Lecture Notes in Electrical Engineering 277: Haptic Interaction.

Zhao, Schneider, Klatzky, Lehman, and Israr. (2014) *FeelCraft: Crafting Tactile Experiences for Media using a Feel Effect Library*. UIST '14 Demos.

**Section 7.2, Feel Messenger** Oliver worked closely with Siyan Zhao and Dr. Israr. All three developed the concept. Siyan led poster design and assisted with figures. Dr. Israr led writing assisted by Oliver and Siyan, and presented this work at CHI'15. Oliver designed and implemented the Feel Messenger application, conducted part of the preliminary study, and led the demo submission and presentation at World Haptics 2015:

Israr, Zhao, and Schneider. (2015) *Exploring Embedded Haptics for Social Networking and Interactions*. CHI EA '15.

Schneider, Zhao, and Israr. (2015) *Feel Messenger: Embedded Haptics for Social Networking*. World Haptics '15 Demos.

**Section 7.3, RoughSketch** Oliver was the senior graduate student on a four-person student team including Paul Bucci, Gordon Minaker, and Brenna Li. All four contributed ideas and haptic designs and iteratively developed the final submission. Oliver provided mentorship and leadership. Paul led graphic design efforts; Gordon and Brenna presented the work at World Haptics 2015. RoughSketch won first place among 10 finalists.

**Section 7.4, HandsOn** Oliver helped supervise Gordon Minaker during a summer NSERC placement and directed studies, with Dr. MacLean supervising and Stanford Education PhD student Richard Davis collaborating. This work was part of a larger collaborative effort including Melisa Orta Martinez, Dr. Allison Okamura, and Dr. Paulo Blikstein from Stanford University. Gordon led the system design and implementation, study design, facilitation, and analysis, and paper writing and submission. Oliver helped supervise Gordon throughout this process, assisted and supervised by Dr. MacLean. Richard helped plan the study, implement software, write the paper, and provide insights for study implementation. All three assisted with poster design. Dr. MacLean presented and demonstrated the work at EuroHaptics 2016, where it won Best Poster award; the system was also included in a demo presented by Melisa at HAPTICS'16:

Minaker, Schneider, Davis, and MacLean. (2016) *HandsOn: Enabling Embodied, Creative STEM e-learning with Programming-Free Force Feedback*. Haptics: Perception, Devices, Control, and Applications: 10th International Conference, EuroHaptics 2016, London, UK, July 4-7, 2016, Proceedings, Part II.

Orta Martinez, Minaker Gordon, Davis, Schneider, Morimoto, Taylor, Barron, MacLean, Blikstein, and Okamura. (2016) *Hand-*

*sOn with Hapkit 3.0: a creative STEM e-learning framework.*  
HAPTICS '16 Demos.

**Section 7.5, CuddleBit Design Tools** Oliver collaborated closely with undergraduate David Marino and master's student Paul Bucci, supervised by Dr. MacLean and with support from Hasti Seifi. Oliver supervised David through his directed studies project, and helped worked with Paul and David in developing and designing the Voodle system. Oliver worked with Paul Bucci to extend Macaron into MacaronBit and contributed writing to a demo presented at EuroHaptics 2016 by Dr. MacLean:

Bucci, Cang, Chun, Marino, Schneider, Seifi, and MacLean. (2016)  
*CuddleBits: an iterative prototyping platform for complex haptic display.* EuroHaptics '16 Demos.

In Chapter 8, UBC alumnus Dr. Colin Swindells conducted interviews and developed interview notes and initial analysis ideas in 2012, supervised by Dr. MacLean and Dr. Kellogg Booth. In 2015-2016, Oliver transcribed and analyzed the collected interviews, organized and analyzed the HaXD'15 workshop ([haptics2015.org/program/index.html#WorkshopsAndTutorials](http://haptics2015.org/program/index.html#WorkshopsAndTutorials)) with guidance from Dr. MacLean, and led writing of a manuscript. Drs. MacLean and Booth contributed to writing; Dr. Swindells provided feedback.

Schneider and Maclean. (2015) *HaXD'15: Workshop on Haptic Experience Design.* World Haptics '15.

Because much of this work has been peer-reviewed, we reproduce published papers as chapters in this dissertation. Chapters 3-6 and 8 each include a newly-written preface to introduce the work, then includes the corresponding paper with only minor formatting modifications. In this way, we preserve the original argumentation of each published work while connecting it to this dissertation's overall goals and findings.

# Table of Contents

<b>Abstract</b> . . . . .	<b>ii</b>
<b>Preface</b> . . . . .	<b>iv</b>
<b>Table of Contents</b> . . . . .	<b>ix</b>
<b>List of Tables</b> . . . . .	<b>xvi</b>
<b>List of Figures</b> . . . . .	<b>xviii</b>
<b>1 Introduction</b> . . . . .	<b>1</b>
1.1 Haptic Experience Design (HaXD) . . . . .	2
1.2 Why is HaXD Hard? . . . . .	3
1.3 Approach . . . . .	4
1.3.1 Depth: Vibrotactile Design Tool Case Studies (Chapters 3-6)	4
1.3.2 Breadth: Focused Haptic Design Projects (Chapter 7) . . .	5
1.3.3 Ground: Data from Haptic Experience Designers (Chapter 8)	5
1.4 Contributions and Outline . . . . .	5
<b>2 Background</b> . . . . .	<b>8</b>
2.1 An Overview of Haptics . . . . .	8
2.1.1 Tactile Perception and Technology . . . . .	9
2.1.2 Proprioceptive Perception and Technology . . . . .	11
2.1.3 Haptic Illusions . . . . .	12

2.2	The Value of Haptic Experiences . . . . .	13
2.2.1	Why Touch? . . . . .	13
2.2.2	Applications . . . . .	14
2.3	Non-Haptic Design and Creativity Tools . . . . .	18
2.3.1	Problem Preparation . . . . .	19
2.3.2	Hands-On Design . . . . .	19
2.3.3	Collaboration . . . . .	20
2.3.4	<b>Design Research</b> . . . . .	20
2.4	Previous Efforts for Haptic Experience Design . . . . .	21
2.4.1	Interactive Software Tools . . . . .	22
2.4.2	Platforms . . . . .	23
2.4.3	Conceptual Tools . . . . .	24
2.5	Methodology . . . . .	26
<b>3</b>	<b>Sketch: The Haptic Instrument</b> . . . . .	<b>29</b>
3.1	Overview . . . . .	30
3.2	Introduction . . . . .	30
3.3	Related Work . . . . .	32
3.3.1	Musical Metaphors in Haptic Design . . . . .	32
3.3.2	Other Haptic Design Approaches . . . . .	33
3.3.3	Haptic Language . . . . .	33
3.4	Defining the Haptic Instrument . . . . .	34
3.4.1	Design Dimensions . . . . .	34
3.5	mHIVE . . . . .	36
3.6	Preliminary Study Methodology . . . . .	38
3.6.1	Procedure . . . . .	38
3.7	Results . . . . .	39
3.7.1	mHIVE Succeeds as a Haptic Instrument . . . . .	40
3.7.2	Tweaking through Visualization and Modification . . . . .	41
3.7.3	A Difficult Language . . . . .	42
3.8	Discussion . . . . .	43
3.8.1	Design Tools . . . . .	43
3.8.2	Language . . . . .	44

3.8.3	Methodology and Limitations . . . . .	44
3.9	Conclusion . . . . .	45
3.10	Acknowledgments . . . . .	45
<b>4</b>	<b>Refine: Tactile Animation . . . . .</b>	<b>46</b>
4.1	Overview . . . . .	47
4.2	Introduction . . . . .	47
4.3	Background . . . . .	48
4.3.1	Haptic Entertainment Technologies . . . . .	48
4.3.2	Haptic Authoring Tools . . . . .	49
4.4	Tactile Animation Authoring Tool . . . . .	52
4.4.1	Gathering Design Requirements . . . . .	52
4.4.2	Framework for Tactile Animation . . . . .	54
4.4.3	Authoring Interface . . . . .	56
4.5	Rendering Algorithm . . . . .	58
4.5.1	Perceptual Selection of Interpolation Models . . . . .	59
4.5.2	Pairwise Comparison Study . . . . .	60
4.6	Design Evaluation . . . . .	62
4.7	Discussion . . . . .	65
4.7.1	Design Evaluation Summary . . . . .	65
4.7.2	Possible Extension to Other Device Classes . . . . .	66
4.7.3	Interactive Applications . . . . .	67
4.7.4	Limitations . . . . .	68
4.8	Conclusion . . . . .	68
4.9	Acknowledgments . . . . .	69
<b>5</b>	<b>Browse: Macaron . . . . .</b>	<b>70</b>
5.1	Overview . . . . .	71
5.2	Introduction . . . . .	71
5.3	Related Work . . . . .	73
5.3.1	Salient Factors in VT Effect Perception and Control . . . . .	73
5.3.2	Past Approaches to VT Design . . . . .	73
5.3.3	Examples in Non-Haptic Design . . . . .	74

5.4	Apparatus Design . . . . .	74
5.5	Study Methods . . . . .	76
5.6	Results . . . . .	77
5.6.1	Archetypal Design Process . . . . .	78
5.6.2	Micro Interaction Patterns Enabled by Tool . . . . .	78
5.6.3	Example Use . . . . .	82
5.7	Discussion . . . . .	84
5.7.1	Implications for Design . . . . .	84
5.7.2	Limitations & Future work . . . . .	86
5.8	Conclusion . . . . .	88
5.9	Acknowledgements . . . . .	88
<b>6</b>	<b>Share: HapTurk . . . . .</b>	<b>89</b>
6.1	Overview . . . . .	90
6.2	Introduction . . . . .	90
6.3	Related Work . . . . .	92
6.3.1	Existing Evaluation Methods for VT Effects . . . . .	92
6.3.2	Affective Haptics . . . . .	93
6.3.3	Mechanical Turk (MTurk) . . . . .	94
6.4	Sourcing Reference Vibrations and Qualities . . . . .	95
6.4.1	High-Fidelity Reference Library . . . . .	96
6.4.2	Affective Properties and Rating Scales . . . . .	96
6.5	Proxy Choice and Design . . . . .	97
6.5.1	Visualization Design ( $VIS_{DIR}$ and $VIS_{EMPH}$ ) . . . . .	99
6.5.2	Low Fidelity Vibration Design . . . . .	99
6.6	Study 1: In-lab Proxy Vibration Validation (G1) . . . . .	101
6.6.1	Comparison Metric: Equivalence Threshold . . . . .	102
6.6.2	Proxy Validation (Study 1) Results and Discussion . . . . .	102
6.7	Study 2: Deployment Validation with MTurk (G2) . . . . .	107
6.7.1	Results . . . . .	108
6.8	Discussion . . . . .	108
6.8.1	Proxy Modalities are Viable for Crowdsourcing (G1,G2: Feasibility) . . . . .	108

6.8.2	Triangulation (G3: Promising Directions/Proxies) . . . . .	109
6.8.3	Animate Visualizations (G3: Promising Directions) . . . . .	109
6.8.4	Sound Could Represent Energy (G3: Promising Directions)	110
6.8.5	Device Dependency and Need for Energy Model for Vi- brations (G4: Challenges) . . . . .	110
6.8.6	VT Affective Ratings are Generally Noisy (G4: Challenges)	111
6.8.7	Response & Data Quality for MTurk LOFIVIB Vibrations (G4: Challenges) . . . . .	111
6.8.8	Automatic Translation (G4: Challenges) . . . . .	111
6.8.9	Limitations . . . . .	112
6.9	Conclusion . . . . .	113
6.10	Acknowledgments . . . . .	113
<b>7</b>	<b>Breadth: Focused Design Projects</b> . . . . .	<b>114</b>
7.1	FeelCraft: Sharing Customized Effects for Games . . . . .	116
7.1.1	FeelCraft Plugin and Architecture . . . . .	116
7.1.2	Application Ecosystem . . . . .	119
7.2	Feel Messenger: Expressive Effects with Commodity Systems . .	120
7.2.1	Feel Messenger Application . . . . .	121
7.2.2	Haptic Vocabulary . . . . .	122
7.2.3	Demo . . . . .	125
7.3	RoughSketch: Designing for an Alternative Modality . . . . .	126
7.4	HandsOn: Designing Force-Feedback for Education . . . . .	127
7.4.1	Introduction . . . . .	129
7.4.2	Tool Development: Conceptual Model and Interface . . .	131
7.4.3	Study 1: Perceptual Transparency . . . . .	133
7.4.4	Study 2: Tool Usability and Educational Insights . . . . .	135
7.4.5	Study 2 Discussion . . . . .	139
7.4.6	Conclusions . . . . .	141
7.5	CuddleBit Design Tools: Sketching and Refining Affective Robot Behaviours . . . . .	141

<b>8 Haptic Experience Design . . . . .</b>	<b>145</b>
8.1 Overview . . . . .	146
8.2 Introduction . . . . .	146
8.2.1 Haptic Experience Design (HaXD) . . . . .	147
8.2.2 Obstacles to Design . . . . .	148
8.2.3 Target Audience . . . . .	149
8.2.4 Roadmap for the Reader . . . . .	149
8.3 Related Work . . . . .	150
8.3.1 Design Thinking as a Unifying Framework . . . . .	150
8.3.2 Haptic Perception and Technology . . . . .	152
8.3.3 Efforts to Establish HaXD as a Distinct Field of Design . .	153
8.4 Part I: Interviews with Hapticians about HaXD in the Wild . . .	156
8.4.1 Method . . . . .	156
8.4.2 Results . . . . .	158
8.5 Part II: Validating the Findings in a Follow-Up Workshop . . . .	177
8.5.1 Method . . . . .	177
8.5.2 Results . . . . .	178
8.6 Discussion . . . . .	181
8.6.1 Activities of Haptic Design . . . . .	182
8.6.2 Challenges for Haptic Experience Design . . . . .	183
8.6.3 Recommendations for Haptic Experience Design . . . .	185
8.6.4 Future of Haptic Design . . . . .	188
8.7 Conclusion . . . . .	189
8.8 Acknowledgements . . . . .	190
<b>9 Conclusion . . . . .</b>	<b>191</b>
9.1 Summary of Research Findings . . . . .	191
9.1.1 Depth: Vibrotactile Design Tool Case Studies . . . . .	191
9.1.2 Breadth: Focused Haptic Design Projects . . . . .	194
9.1.3 Ground: Data from Hapticians . . . . .	194
9.2 HaXD Process: Requirements for Tools . . . . .	195
9.2.1 Contextual Activities of Design: Sketch, Refine, Browse, Share . . . . .	196

9.2.2	Generalizing Devices and Sensations . . . . .	200
9.2.3	Framing and Meaning . . . . .	202
9.3	HaXD Tools: Designing and Implementing . . . . .	203
9.3.1	Communities and Online Deployment . . . . .	204
9.3.2	Towards a Mature HaXD Tool Suite . . . . .	205
9.3.3	Notes on Implementing HaXD Tools . . . . .	206
9.3.4	Evaluating HaXD Tools . . . . .	208
9.4	Future Work . . . . .	209
9.5	In Closing . . . . .	210
<b>Bibliography</b>	. . . . .	<b>211</b>
<b>A Supporting Materials</b>	. . . . .	<b>251</b>
A.1	Study Forms . . . . .	251
A.1.1	Primary Study Forms . . . . .	251
A.1.2	Tactile Animation Forms . . . . .	258
A.1.3	HapTurk Forms . . . . .	262
A.1.4	HandsOn Forms . . . . .	268
A.1.5	Haptician Interview Form . . . . .	274
A.2	Examples of Qualitative Analysis Methods . . . . .	279

# List of Tables

Table 4.1	Literature Requirements (LRs) for a tactile animation authoring.	50
Table 5.1	Macaron tool alternatives, varied on dimensions of internal visibility and element incorporability. . . . .	76
Table 5.2	Steps in observed archetypal design process. . . . .	79
Table 5.3	Strategies used by participants to directly use examples as a starting point. Ignore and Inspire did not start with copy/paste; Template, Adjust, and Select did, with varying amounts of editing afterwards. When copy/paste was not available, manual re-creation was used as a stand-in. . . . .	83
Table 7.1	Learning tasks used with <i>SpringSim</i> in Study 2. <i>Bloom</i> level is a measure of learning goal sophistication [15] . . . . .	136
Table 8.1	Sub-theme summaries for the Holistic Haptic Experiences (Ex1) theme. . . . .	161
Table 8.2	Sub-theme summaries for the Collaboration (Co) theme. . . . .	165
Table 8.3	Internal roles, the various descriptors used to label them, and descriptions. Roles were grouped and named by the authors based on participant-provided descriptors. . . . .	166
Table 8.4	External roles, the various descriptors used to label them, and descriptions. . . . .	169
Table 8.5	Sub-theme summaries for the Cultural Context (CC) theme. . . . .	171

Table 9.1 Four design activities that are supported in other fields of de-sign, but need explicit support in HaXD. . . . .	196
--	-----

# List of Figures

Figure 1.1	The classic design funnel, adapted from Buxton [30]. Multiple initial ideas are iteratively developed into final concepts. We add four design activities that occur across design fields, but need to be explicitly supported for HaXD: <i>sketching, refining, browsing, and sharing.</i> . . . . .	3
Figure 1.2	Approach overview. We investigate VT design tools (Chapters 3-5) and techniques (Chapter 6) in-depth. These findings are synthesized with multiple, smaller focused projects (Chapter 7) and grounded data from hapticians (Chapter 8) into a preliminary understanding of HaXD. . . . .	4
Figure 3.1	Concept sketch of a haptic instrument. Both users experience the same sensation, controlled in real-time. . . . .	29
Figure 3.2	The haptic instrument concept. One or more people control the instrument, and receive real-time feedback from the device. Any number of audience members can feel the output in real time as well. Control methods can vary, from traditional musical control devices (such as the M-Audio Axiom 25, used in preliminary prototypes) to touchscreen tablets (used in mHIVE). Output devices vary as well. . . . .	31
Figure 3.3	mHIVE interface. Primary interaction is through the amplitude-frequency view, where visual feedback is provided through a circle (current finger position) and a trail (interaction history). . . . .	37

Figure 3.4	Study setup. Both the participant (left) and the interviewer (right) feel the same sensation as the participant controls mHIVE.	40
Figure 4.1	Concept sketch for tactile animation. An artist draws an animated sequence in the user interface and the user experiences phantom 2D sensations in-between discrete actuator grids. . .	46
Figure 4.2	Comparison between related systems. . . . .	51
Figure 4.3	Tactile animation rendering pipeline. Users can: (a) create tactile animation objects; (b) render objects to actuator parameter profiles (such as amplitude) with our rendering algorithm; (c) rasterize vector sensations into frames; (d) play the sensation on the device. . . . .	53
Figure 4.4	Mango graphical user interface. Key components are labeled and linked to corresponding design requirements. . . . .	56
Figure 4.5	Interpolation models to determine physical actuator output ( $A_{1-3}$ ) from virtual actuator intensity ( $A_v$ ) and barycentric coordinates ( $a_{1-3}$ ). . . . .	59
Figure 4.6	Rendering study setup and user interface. . . . .	60
Figure 4.7	Example of P2’s animation for matching a sound. See the accompanying video for all participant animations. . . . .	63
Figure 4.8	Tactile animation could define motion with (a) 1D actuator arrays, (b) dense and sparse VT grids, (c) handhelds, (d) 3D surfaces, (e) multi-device contexts, and (f) non-VT devices like mid-air ultrasound. . . . .	66
Figure 5.1	Concept sketch for a Macaron, an online, open-source VT editor features incorporable examples and remote analytics. . .	70
Figure 5.2	Macaron interface, “hi” version featuring both composability (copy and paste), and visibility of underlying parameters. The user edits her sensation on the left, while examples are selected and shown on the right. Macaron is publicly available at <a href="https://hapticdesign.github.io/macaron">hapticdesign.github.io/macaron</a> . . . . .	72

Figure 5.3	Design space for Macaron versions. <code>hi</code> and <code>sample</code> both allow for selection and copying of example keyframes. <code>vis</code> and <code>hi</code> both show the underlying profiles. <code>lo</code> represents the current status quo; only a waveform is shown. . . . .	75
Figure 5.4	Animations used as design tasks, in presentation order. Heartbeat expands in two beats; the cat’s back expands as breathing and purring; lightning has two arhythmic bolts; the car oscillates up and down, and makes two turns: left then right; snow has three snowflakes float down. . . . .	77
Figure 5.5	Log visualizations showing archetypal design process. Top: P10’s heartbeat/ <code>vis</code> condition (an “ideal” version). Bottom: P3’s car/ <code>hi</code> condition (variations: a return to example browsing after editing, repeated refinement, muted editing). . . . .	78
Figure 5.6	Participants created their designs using different progression paths, suggesting flexibility. . . . .	81
Figure 5.7	Participants used real-time feedback to explore, both (a) in time by scrubbing back and forth (P3 lightning/ <code>lo</code> ), and (b) by moving keyframes (P10 heartbeat/ <code>vis</code> ). . . . .	82
Figure 6.1	In HapTurk, we access large-scale feedback on informational effectiveness of high-fidelity vibrations after translating them into proxies of various modalities, rendering important characteristics in a crowdsource-friendly way. . . . .	89
Figure 6.2	Source of high-fidelity vibrations and perceptual rating scales.	95
Figure 6.3	$\text{VIS}_{\text{DIR}}$ visualization, based on VibViz . . . . .	96
Figure 6.4	Visualization design process. Iterative development and piloting results in the $\text{VIS}_{\text{EMPH}}$ visualization pattern. . . . .	97
Figure 6.5	Final $\text{VIS}_{\text{EMPH}}$ visualization guide, used by researchers to create $\text{VIS}_{\text{EMPH}}$ proxy vibrations and provided to participants during $\text{VIS}_{\text{EMPH}}$ study conditions. . . . .	98
Figure 6.6	Example of LOFIVIB proxy design. Pulse duration was hand-tuned to represent length and intensity, using duty cycle to express dynamics such as ramps and oscillations. . . . .	100

Figure 6.7	Vibrations visualized as both $\text{VIS}_{\text{DIR}}$ (left) and $\text{VIS}_{\text{EMPH}}$ . . .	101
Figure 6.8	95% confidence intervals and equivalence test results for Study 1 - Proxy Validation. Grey represents REF ratings. Dark green maps equivalence within our defined threshold, and red a sta- tistical difference indicating an introduced bias; light green re- sults are inconclusive. Within each cell, variation of REF rat- ings means vibrations were rated differently compared to each other, suggesting they have different perceptual features and represent a varied set of source stimuli. . . . .	103
Figure 6.9	Rating distributions from Study 1, using V6 Energy as an ex- ample. These violin plots illustrate 1) the large variance in participant ratings, and 2) how equivalence thresholds reflect the data. When equivalent, proxy ratings are visibly similar to REF. When uncertain, ratings follow a distribution with un- clear differences. When different, there is a clear shift. . . . .	104
Figure 6.10	95% Confidence Intervals and Equivalence Test Results for Study 2 - MTurk Deployment Validation. Equivalence is in- dicated with dark green, difference is indicated with red, and uncertainty with light green. Red star indicates statistically significant difference between remote and local proxy ratings.	106
Figure 7.1	FeelCraft architecture. The FeelCraft plugin is highlighted in green. The FE library can connect to shared feel effect repos- itories to download or upload new FEs. A screenshot of our combined authoring and control interface is on the right. . . . .	117
Figure 7.2	Mockup for FeelCraft demo system. . . . .	119
Figure 7.3	Application ecosystem for FeelCraft and an FE repository . .	119
Figure 7.4	Users exchanging expressive haptic messages on consumer em- bedded devices. . . . .	120
Figure 7.5	Graphical representation of haptic vocabularies and icons. . .	123
Figure 7.6	Some examples of expressive haptic messages embedded with normal text messages. . . . .	124
Figure 7.7	Implemented Feel Messenger demo at World Haptics 2015. .	125

Figure 7.8	RoughSketch handout, illustrating interaction techniques and textures. . . . .	127
Figure 7.9	RoughSketch poster, describing interaction techniques and high-level findings. . . . .	128
Figure 7.10	Students, teachers, and researchers can explore science, technology, engineering, and math (STEM) abstractions through low-fidelity haptics, incorporating elements into system designs.	129
Figure 7.11	The <i>HandsOn</i> CM enables three kinds of exploration based on requirements. . . . .	132
Figure 7.12	<i>SpringSim</i> interface, a <i>HandsOn</i> sandbox for a single lesson module on springs. . . . .	133
Figure 7.13	In the <i>Hapkit+Dynamic Graphics</i> condition, graphical springs responded to input (left); static images were rendered in the <i>Hapkit+Static Graphics</i> condition (right); in both, HapKit 3.0 [198] was used as an input/force-feedback device (far right). .	135
Figure 7.14	Two examples of CuddleBits, simple DIY haptic robots. . . .	142
Figure 7.15	CuddleBit design tools. Voodle enables initial <i>sketching</i> of affective robot behaviours, while MacaronBit enables <i>refining</i> . .	143
Figure 8.1	Our three themes, each exploring different levels of scope through 5 emergent sub-themes. . . . .	147
Figure 8.2	Responses for tools used in haptic design (N=16, “ <i>check all that apply</i> ”). . . . .	178
Figure 8.3	Responses for evaluation techniques used (N=16, “ <i>check all that apply</i> ”). . . . .	180
Figure 8.4	Reported group size for projects (N=16, “ <i>check all that apply</i> ”).	180
Figure 9.1	Vibrotactile design case studies. Each studied an aspect of vibrotactile design with a varied set of users, devices, platforms, and foci. . . . .	192
Figure A.1	Picture of whiteboard when developing themes during Macaron analysis (Chapter 5). . . . .	280

Figure A.2	Affinity diagram showing clustering of participant statements into themes during Macaron (Chapter 5) analysis. . . . .	281
Figure A.3	Screenshot of video coding sheet used to develop and count codes and calculate task timing during Macaron analysis (Chapter 5). . . . .	282
Figure A.4	Screenshot of transcribed participant comments with code tags from Macaron analysis (Chapter 5). . . . .	283
Figure A.5	Image of all participant timelines developed for Macaron analysis (Chapter 5). . . . .	284

# Chapter 1

## Introduction

Technology changes. Symbolic, machine-focused communication like punch cards, assembly languages, and terminal interfaces yield to natural, physical, always-connected interactive systems. The emergence of virtual and augmented reality (VR & AR), rapid development of personal fabrication techniques, and explosion of wearable and cyberphysical technologies propel us towards a mixed physical-digital world at an accelerating pace. As computers expand beyond screens and keyboards, we look to engage the rich senses of touch.

Haptic experiences are moving from niche roles to mainstream adoption. Haptic technology includes both the tactile (skin-based) and proprioceptive (force- and position-based) components of touch. Recently, other natural interaction techniques like touchscreens and voice control held the limelight, with haptic feedback relegated to buzzing alerts or limited to high-stakes expert systems like laparoscopic surgery. Now, new media seeks deeper immersion, smart environments look to connect physically with users, and consumer devices like the Apple Watch and Pebble adopt high-fidelity haptic actuators. The question is how to enable designers to craft experiences with these technologies.

The diverse field of haptics has seen active engineering of new devices and study of human perception, but the design of haptic experiences remains a critical challenge. Little is known about this nascent field of design, with many unique challenges: real-world haptic experiences are rich, diverse, multimodal entities which necessitate in-person interaction, while synthesized haptics strive to **match**

**these characteristics.** How can we support creativity with these experiences, empowering artists, developers, designers, and scientists to effectively work with this emerging medium? In this dissertation, we study the process of haptic experience design (HaXD) and establish guidelines for building interactive software systems to support it.

## 1.1 Haptic Experience Design (HaXD)

We define HaXD as:

*The design (planning, development, and evaluation) of user experiences deliberately connecting interactive technology to one or more perceived senses of touch, possibly as part of a multimodal or multi-sensory experience.<sup>1</sup>*

We use HaXD instead of “haptic design”, which can also refer to design practices related to haptics but not directly involving the user experience, *e.g.*, mechanical design of a new display mechanism.

We refer our intended supported designer as a *haptician*:


*One who is skilled at making haptic sensations, technology, or experiences.*

We use “haptician” to capture the diversity of people who currently make haptics, and the diversity of their goals. Many users with a need to design with haptics may not have formal design training, and may not have a focus on creating entire experiences of haptics.

In this dissertation, we take a systems approach to design. Designers do not exist in a vacuum, but rather in a physical, personal, social, and cultural context. We adopt a framework of design activities which are practiced in general experience design, but need explicit support in HaXD. Our research identified four activities (Figure 1.1): *sketching*, ad-hoc, suggestive exploration; *refining*, iteration and fine-tuning; *browsing* examples and drawing from experience; and *sharing* designs for feedback and posterity. Chapters 3-6 explore these activities directly.

---

<sup>1</sup>We developed this definition from our interviews with hapticians (Chapter 8).

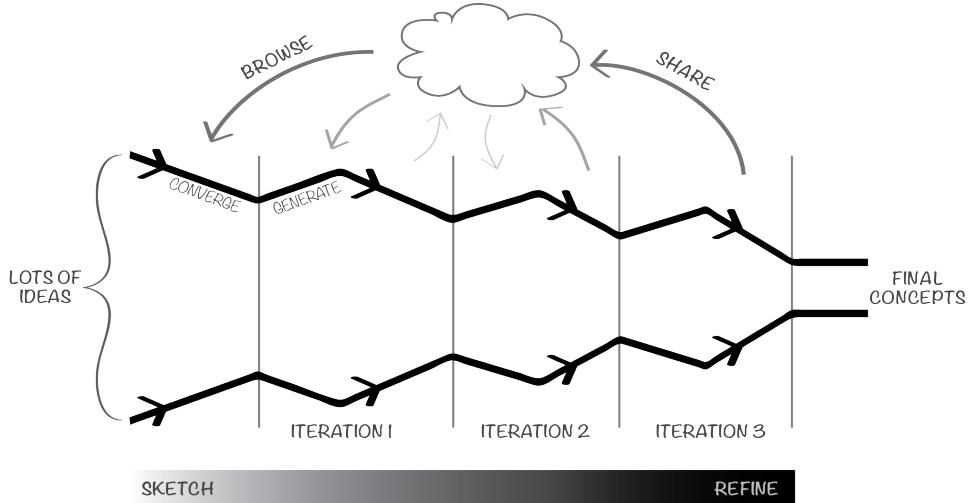

**Figure 1.1:** The classic design funnel, adapted from Buxton [30]. Multiple initial ideas are iteratively developed into final concepts. We add four design activities that occur across design fields, but need to be explicitly supported for HaXD: *sketching, refining, browsing, and sharing*.


## 1.2 Why is HaXD Hard?

Two major types of challenges facing HaXD are those resulting from its relative youth, and those intrinsic to the sense of touch and touch-based technology. One goal of this dissertation is to articulate the challenges that have been known informally for years, and capture those that are not as well known.

The first conference to explicitly focus on haptics was the Haptics Symposium in 1992, which focused on engineering concerns. As a result, design for haptic experiences is not as mature as for vision and audio, which can draw from centuries of music and graphic design, and decades of sound design, translating well to their digital equivalents. We see this **immaturity** with limited, varied language for touch [131] and the limited infrastructure to support the wide variety of haptic devices [110], to the point where online distribution is current research [1].

There are also intrinsic challenges when designing for touch: variabilities in low-level perception due to, *e.g.*, individual differences [164], device location and user activity [143], and aging [253, 254]; a strong influence of user preferences [239, 240]; complexity of the haptic senses [48, 141, 152]; and tight technical

constraints cross-cutting software and hardware [110, 161]. Throughout this work, we identify and characterize these challenges, and make progress to conquer them.

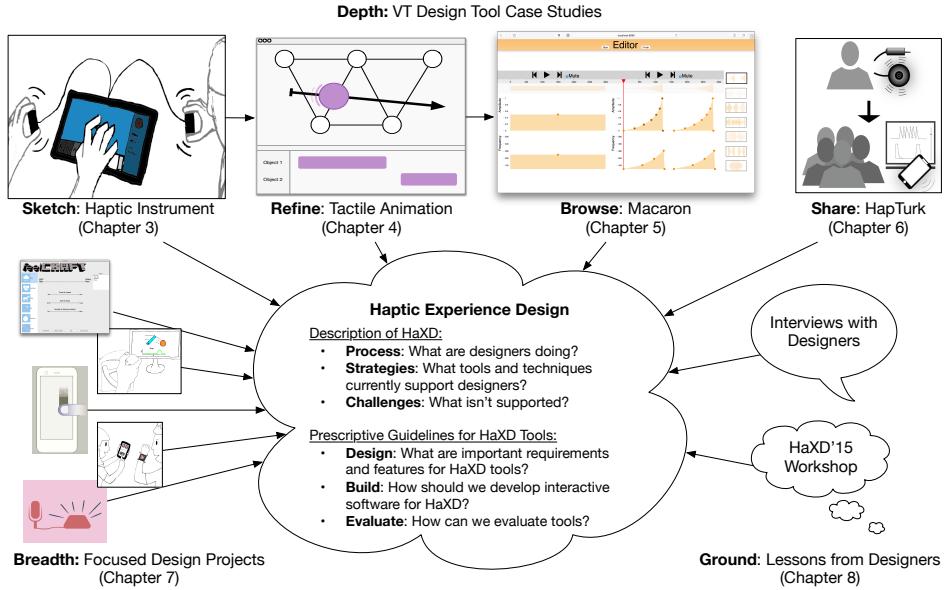

**Figure 1.2:** Approach overview. We investigate VT design tools (Chapters 3-5) and techniques (Chapter 6) in-depth. These findings are synthesized with multiple, smaller focused projects (Chapter 7) and grounded data from hapticians (Chapter 8) into a preliminary understanding of HaXD.

## 1.3 Approach

We approach this problem with three strategies: vibrotactile design tool case studies for depth, a variety of focused design projects for breadth, and data from haptic designers to ground our findings (Figure 1.2).

### 1.3.1 Depth: Vibrotactile Design Tool Case Studies (Chapters 3-6)

To understand design, we practice design. The larger part of our inquiry follows *research through design* [], where we create artifacts to draw TODO. In each of three case studies, we design, build, and evaluate a tool or technique to support an

aspect of HaXD, scoped to *vibrotactile* (VT) design. Each of these results in concrete implications for designing tools and a small window onto the larger HaXD process. Contributions include algorithms, data structures, interaction techniques, features, analytic techniques, and working software tools that have been employed by designers. Chapter 3, Chapter 4, and Chapter 5 outline iterative development and evaluation of VT design tools; Chapter 6 covers a VT design technique (proxies).

### **1.3.2 Breadth: Focused Haptic Design Projects (Chapter 7)**

While we investigate VT sensation design in-depth through our case studies, results may not generalize to other devices, and provide limited investigation into application areas like education. To generalize from VT effects, explore other aspects of haptic design, and gain personal experience as haptic experience designers, we participate in several smaller focused design projects, which lend a broader context to our findings. Chapter 7 discusses these projects.

### **1.3.3 Ground: Data from Haptic Experience Designers (Chapter 8)**

Despite the recent growth of the field of haptics, haptic designers remain relatively rare and difficult to recruit. To complement our primarily design-based approach and ground it with haptic designers in the field, we draw from other data sources: a workshop held at World Haptics 2015 and interviews with haptic designers. Chapter 8 discusses this characterization of HaXD, and serves as a capstone to this dissertation by defining HaXD and articulating a vision for how HaXD might manifest.

## **1.4 Contributions and Outline**

This dissertation makes two primary contributions, the first directed towards the haptics community and the second towards the design research community. To the haptics community, we repeatedly find value in applying design thinking to haptic media. A haptic designer and a graphic designer follow a similar process, and design tools can be improved by considering a wider context than simple editing interfaces: collaborators, examples, and designer experience all provide value.

However, applying design thinking to haptic media is not always straightforward. To the design research community, we present HaXD as a frontier that challenges underlying assumptions about design. Several basic activities that are taken for granted in non-haptic fields need explicit support when conducted with haptics.

This dissertation continues as follows. First, in Chapter 2, we present the necessary background with an overview of haptic technology and perception, the value of haptics and related applications, design theory from non-haptic fields, existing haptic design tools and techniques, and the methodology underlying our work.

Then, we describe each VT case study in Chapters 3-6. Through these four case studies, we practice Research through Design [], manifesting design thinking ideas into practical support tools for hapticians. Increasingly, we found ourselves drawing directly from modern non-haptic design tools, but needing to solve new problems to accommodate haptic technology.

In Chapter 3, we present findings from our first vibrotactile design tool, the haptic instrument, which supported easy exploration and informal feedback (*sketching*), but identified a key problem: it did not support *refining* designs.

In Chapter 4, we present findings from our second vibrotactile design tool, Mango, which established a generalized pipeline and was able to support both *sketching* and *refining* for expert visual animators; it highlighted reuse as an important next step.

In Chapter 5, we present findings from our third vibrotactile design tool, Macaron, which implemented a *browsing* interface and analytics system; we found examples played a large part of the design process, and used *interaction* logs to provide a picture of our participants' design process, including confirmation of project preparation and *browsing*, initial design, *sketching*, and *refining*.

In Chapter 6, we document findings from HapTurk, a technique for *sharing* vibrotactile designs for feedback at scale. In this project, we distribute proxy vibrations over Mechanical Turk to collect feedback from the crowd.

We then describe focused haptic design projects in Chapter 7. In Chapter 7, we synthesize together findings from our side projects, showing generality by applying our understanding of haptic design explicitly in several domains and gaining practical experience designing haptic experience. This allowed us to reflect upon our own design process as practitioners [235].

In Chapter 8, we complement our design-based inquiry through interviews with professional haptic designers and a workshop run to elicit feedback from the community; this captures a description of haptic design, reinforces our findings for important support tools, and identifies more systematic challenges.

Finally, in Chapter 9, we conclude with a synthesis of our final results and directions for future research.

# Chapter 2

## Background

In this chapter, we provide the relevant background for this dissertation. We begin with an overview of haptic technology and perception. Next, we discuss the application space for haptics and why haptic experiences are increasingly important to design. We then discuss non-haptic creativity support tools and design theory which provided inspiration and guiding principles. After, we discuss the previous work in HaXD and related support tools, identifying why this is an area for improved understanding. Finally, we present the qualitative and quantitative methodologies used in this dissertation. Throughout the chapter, we contextualize this work and HaXD in both the haptics and HCI communities.

### 2.1 An Overview of Haptics

The term “haptic” was coined [in 1892](#) by German researcher Max Dessoir to refer to the study of touch, similar to “optic” for sight and “acoustic” for sound [97]. Today, it refers to both the study of the psychology and perception of the senses of touch, and the technology that employs touch as a method of feedback. Haptic technology is typically separated into two classes based on the main sense modality: *tactile* (or *cutaneous*) sensations, and *proprioception*, or the sense of body location and force; the latter includes *kinaesthetic* senses of force and motion. These two types of feedback are useful for different purposes, *e.g.*, people use their fingerpad’s tactile senses to derive texture, but kinaesthetic feedback to infer weight

[151]; different senses can be combined for more convincing results [194]. For an overview of the haptic senses, we direct the reader to Lederman and Klatzky [152]; for a practical introduction to haptic technology, we suggest Hayward and Maclean [110]. We focus our coverage on the sensations directly studied by this dissertation (**vibrotactile feedback**, **programmable friction**, **simple force-feedback**, **simple haptic robots**), while also portraying the diversity of haptic experiences and technology.

### 2.1.1 Tactile Perception and Technology

Tactile sensations rely on multiple sensory organs in the skin, each of which detect different properties, *e.g.*, Merkel disks detect pressure or fine details, Meissner corpuscles detect fast, light sensations (flutter), Ruffini endings detect stretch, and Pacinian corpuscles detect vibration [48]. Haptic technology has evolved along two parallel paths: stimulating sensory mechanisms and mimicking realistic environments. Tactile technologies are at least as diverse as the senses they stimulate and the environments they simulate.

Vibrotactile (VT) sensations, where vibrations stimulate the skin, target the Pacinian corpuscle. VT actuators can take many forms; the more affordable techniques tend to directly stimulate skin. Eccentric mass motors (sometimes “rumble motors” or “pager motors”) are found in many mobile devices and game controllers, and are affordable but inexpensive. More expressive mechanisms such as voice coils offer independent control of two degrees of freedom, frequency and amplitude. Piezo actuation is a very responsive technique that is typically more expensive than other vibrotactile technology. While voice coils typically directly stimulate the skin, linear resonant actuators (LRAs) shake a mass back and forth to vibrate a handset in an expressive way; a common research example is the Haptuator [279]. Instead of directly stimulating the skin, this actuator typically shakes another device held by the user, such as a mobile device [286] or pen [56]; this approach is amenable to both designed artificial stimulation and physical realism. As of 2016, LRAs are increasingly deployed in consumer products (*e.g.*, Apple’s Taptic Engine).

VT sensations are accessible, well-studied, and increasingly widespread, and

can be passively felt, easing implementation. Our in-depth design tool studies thus focus on VT experiences. Actuators like VT devices can be used alone or put together in spatial multiactuator displays like seats [124, 127], belts [199, 204], wristbands [7, 103, 199], vests [135, 206], and gloves [145, 201]. These can be arranged into grids, either dense tactile pixels (“taxels”) [145] or sparse arrays [124, 127], to provide 2D output on a plane. Multiactuator arrays increasingly exploit tactile illusions to create effects of motion or phantom sensations in-between actuators.

Another emerging tactile feedback mechanism is programmable friction, creating shear forces on the skin to target sensations of skin stretch. Surface friction, for example on a mobile touch screen, can be manipulated by both mechanical motion or electrical adhesion. The TPad [276] vibrates a plate at ultrasonic frequencies to create a cushion of air between the surface and the user’s finger. This effect is programmable, and can be used to with a number of interactive scenarios [160]. Other techniques like electrovibration, deployed in TeslaTouch [13], and electrostatic forces [179], can create a similar effect. Strong electroadhesion [246] has the potential to create very large shear forces, but comes with a high power cost. In RoughSketch (Chapter 7), we design for a mobile version of the TPad deployed on Android devices, the TPad phone ([www.thetpadphone.com](http://www.thetpadphone.com)).

There are many other types of tactile stimulation used in haptic experiences. 2-dimensional pin-based grids like Optacon [14] and HyperBraille ([www.hyperbraille.de](http://www.hyperbraille.de)) can display Braille and 2D images to the blind and visually impaired, and can operate as a generic computer display [207]. Similar multi-point displays have been deployed on mobile devices. Edge Haptics uses dozens of linearly-actuated pins on the edge of a mobile device for tactile stimulation, similar to braille pin displays [130], while laterally moving pins can use skin-stretch as a display mechanism [165]. Electrocutaneous stimulation, where electrodes directly stimulate the skin, has been deployed for spatial tongue displays [10]. Temperature displays exploit warm and cold receptors in **the** skin for display, using Peltier junctions [138]. Tactile sensations can be created at a distance using ultrasonic transducers [35, 191] and vortex cannons that shoot puffs of air [250].

### 2.1.2 Proprioceptive Perception and Technology

Proprioception, the sense of force and position, is synthesized from multiple sensors as well: the muscle spindle (embedded in muscles), golgi-tendon organ (GTO) in tendons, and tactile and visual cues [141]. We distinguish proprioception from the related term kinaesthetic by being the general, synthesized sense, where kinaesthetic sensation is strictly the sense of motion. Force displays are common in precise, specialized applications like robot-assisted surgery [195] or realistic sensorimotor training environments [267]. The focus is usually on simulation, creating forces on the user from a virtual environment.

Force-feedback devices differ in their degrees of freedom of feedback (DoF), the number of variables needed to express their kinematic state. These devices render a *virtual environment*, with simulated forces depending on the input from the user. Common consumer-facing 3-DoF devices include the Geomagic Touch (previously the Sensable PHANTOM) and Falcon devices, offering force in three directions. 2-DoF designs like the pantograph [32, 210] can provide displays on screens, walls, and tables. Research with these displays often requires realistic simulation and rendering: *e.g.*, making free space feel free, providing stiff virtual objects and walls, and avoiding saturation [177]. Open-hardware, self-assembled versions of these devices, such as WoodenHaptics [85] for 3-DoF devices and Haplet [89] for 2-DoF displays, have the potential to make haptics more accessible. Much previous work has been done on handling technical concerns, *e.g.*, displaying complex polygonal objects with a “God object” [290], coordinating remotely situated devices or shared environments [29], and improving collision realism with transient forces [148]. More complex environments are primarily programmed in using APIs like CHAI3D, OpenHaptics, or Unity.

Another approach is to use simple force feedback, for example, for haptics education [134]. 1-DoF devices include linear actuators pushing on the user and haptic knobs, *e.g.*, the UBC Twiddler [76, 171, 243], and paddles, *e.g.*, the HapKit [198]. The UBC SPIN lab has also adopted 1-DoF force feedback in its affective robot, the Haptic Creature [282, 283], the CuddleBot [2], and CuddleBits [33]. We explore force-feedback design with the HapKit and CuddleBits in Chapter 7.

### 2.1.3 Haptic Illusions

Like the stroboscopic effect transforming a series of images into the perception of motion for visual displays, illusions play a valuable role in haptic sensations [109]: they let a designer create convincing sensations without accurately simulating physical environments. Some are influenced by other senses. In the classic size-weight illusion [44], when two weights have the same mass but different sizes, the smaller is perceived to be heavier, whether size is seen or felt [109]. Similar effects occur with synthesized haptic effects: perceived stiffness of a spring changes with both visual distortion of the spring’s position [252] and the sound that is played [64]. A striking, recent example is the use of visual dominance to use a single physical block to provide haptic feedback for multiple virtual blocks by distorting the visual position of the user’s arm [9]. We employ similar techniques in our FeelCraft and Feel Messenger projects, using visual feedback to prime users to haptic sensations (Chapter 7).

Other illusions are purely tactile and useful for multiactuator displays; in these cases, they expand the haptic palette. Phantom tactile sensations [4], create illusory vibrations in between two or more VT actuators, opening up the space in-between actuators for display. Continuous motion can be simulated, *e.g.*, Seo and Choi [241] created a perceived motion flow between two VT actuators mounted on the ends of a handheld device by controlling their intensity. Similarly, Lee et al. [158] created across-the-body and out-of-the-body illusions on a mobile device using up to four LRAs; Gupta et al. [103] used interpolation on a VT wristband for new interaction techniques. The Tactile Brush algorithm [125] combined phantom tactile sensations and apparent tactile motion to render high-resolution and moving haptic patterns on the back using a coarse grid of VT actuators. Other spatio-temporal VT illusions such as the “cutaneous rabbit” [261], where carefully timed discrete tactile stimuli create perceived motion, and Tau and Kappa effects [108, 109], where perceived distance between stimuli depending on their timing, can also be used with VT arrays. Similar illusions are possible using other tactile modalities, including temperature displays [248] and electrocutaneous stimulation [263]. We extend phantom VT sensations to 2D interpolation (*e.g.*, between 3 actuators) to enable Tactile Animation (Chapter 4).

Of course, haptic perception can depend on the user’s physical and attentional connection with the device, especially important in wearable contexts. Vibrotactile detection depends on many variables, including location on the user’s body, how much the user is moving, and whether they are expecting the vibration [143], and social context [37]. These effects can be mitigated through sensing, *e.g.*, detecting movement with accelerometers [16]. The implications of context on HaXD are discussed by professional designers in Chapter 8.

## 2.2 The Value of Haptic Experiences

Haptic feedback can provide several benefits to interactive experiences. Here, we outline the main benefits haptics provides, and then several application areas that commonly leverage those benefits.

### 2.2.1 Why Touch?

Haptic technology enables information transfer between humans and computers; this transfer is rich, proximal, and fast. Information flows both ways, through input and output, sometimes simultaneously. We focus on designed haptic display.

One advantage of touch is simply that it is not vision or audio, the primary feedback methods for interactive systems. Haptic technology can reinforce other modalities, enriching feedback for a more complete experience, or provide complementary feedback, with many possible reasons: information saturation, *e.g.*, when visual or audio displays have maximized their output; task context, *e.g.*, when the user is driving and must keep their eyes on the road; impairment or impairing situations, *e.g.*, when a user has limited sight or hearing; ambient displays, *e.g.*, keeping a user aware of a piece of information without interrupting them; or nature of the information, *e.g.*, communicating emotion. For example, touch can be used as a substitute for other senses [11], and the result can be dramatic, *e.g.*, a blind person using a tongue-based display to seeing a rolling ball well enough to bat it as it falls [12]. Many other devices have been developed and studied for the visually impaired (*e.g.*, [14, 207]).

Of course, touch is a unique, rich sense in its own right. **Touch can be both invisible, like sound, and spatial, like vision.** Touch is the first sense to develop,

playing an important role in formative experiences [131]; sensorimotor actions can help to scaffold understanding through embodied learning [200]. **Feeling an object is especially helpful at discerning material properties [151]**. Touch can also be used for artistic expression: Gunther et al. [102] studied a full-body vibrotactile suit to create music-like “cutaneous grooves”, helping to identify the artistic space of VT sensations, including concerts with tactile compositions.

While haptic feedback can improve usability and task performance [39, 204], touch is especially connected to visceral, emotional connections. Marketing research has studied multiple ways that touch can connect with customers: the way a smartphone feels can influence a purchase over an alternative that might work better, and customers prefer to shop at stores that let them touch products [131, 251].

### 2.2.2 Applications

While realistic virtual environments for force-feedback haptic feedback are helpful in medical or training applications [195, 267], we focus on applications that benefit from an explicit experience design step: gathering requirements from end-users, iteratively exploring many ideas, and evaluating the experience of use.

#### Immersion

Touch can subtly draw a user into an experience. A popular application is augmented, immersive media experiences. Actuated tactile feedback has been used as early as 1959 in the movie *The Tingler* [122]. 4D theatres and theme park rides use bursts of air or water sprays to engage the audience. Companies like D-Box ([www.d-box.com](http://www.d-box.com)) augment films with haptic tracks that **feature** both low-frequency movements and high-frequency vibrations, and can be found in theatres across the world. Buttkicker ([www.thebuttkicker.com](http://www.thebuttkicker.com)) also augments 4D theatres, and provides products for home theatre setups. In these experiences, we need to support designers’ artistic control over the sense of touch.

Haptic experiences are also increasingly of interest in virtual reality (VR) environments for, *e.g.*, entertainment, training, and education. Skin stretch techniques, measured by Levesque and Hayward [159], have been explored in mobile displays [100, 165] and are now commercialized by Tactical Haptics ([tacticalhaptics.com](http://tacticalhaptics.com))

to augment virtual-reality setups by simulating forces and torques using handheld controllers, lending stronger immersion for virtual environments and VR games. Haptic Turk [45] and TurkDeck [46] are innovative explorations of high-fidelity haptic experiences in virtual environments using people as actuators. Impacto uses electrical muscle stimulation and a solenoid actuator to create wearable kinaesthetic and tactile feedback [163]. Haptic retargeting distorts visual feedback to re-use a single physical block in a virtual block-building game [9].

Previous work has also attempted to add greater immersion to broadcast media by including haptic sensations. Modhrain and Oakley [183] present an early vision of Touch TV, using active touch with two-DOF actuators embedded in remote controllers; Gaw et al. [92] follow up with editable position playback on a force-feedback device, played alongside movies or cartoons. More recently, the proliferation of online streaming video has developed opportunities to add haptic sensations using novel data formats **that can handle diverse and interactive feedback, from forces to temperature**. Researchers have looked at how to integrate a haptic track into Tactile Movies [145], YouTube [90], or haptic-audiovisual (HAV) content [62], complete with compositional guidelines drawing inspiration from film and animation [99].

### Affect

Researchers are developing design guidelines to express emotions through haptic experiences. Low-level parameters like amplitude, frequency, and duration have been linked to emotions, *e.g.*, with VT icons [285] and mid-air ultrasound stimulation [192]. Because touch can be bidirectional, affective sensing can accompany haptic display. The Haptic Creature project established a touch dictionary of gestures that emotionally communicate with robots [283]. Touch-based surfaces can detect these gestures [81] through technologies like conductive fur and fabric [82].

To study emotion and technology, researchers commonly draw from two affective models: Ekman’s basic emotions and Russell’s affect grid. Ekman’s basic emotions [73, 74] are a discrete set of emotions identified from a cross-cultural study of facial expressions; we use this model’s emotions as the design task in Chapter 3. Russell’s affect grid [216, 217] separates emotions into dimensions of

arousal (low to high energy) and valence (positive and negative emotions); this work informs our perspective on expressivity, especially with the CuddleBit work in Section 7.5.

The emotional nature of touch has implications for design; for example, couples are more comfortable than strangers when using a “hand stroke” metaphor for two remotely coupled haptic devices [249]. Emotional display through touch has therapeutic applications. Bonanni et al. [18] created TapTap, a wearable that can record and playback VT equivalents of affectionate touch to support users in therapy. Tactile displays target mental health [269] and emotional understanding for autism [43]. The Haptic Creature project explores affective touch in human-robot interaction (HRI) [281–284]; this furry, zoomorphic robot can measurably relax users when they feel it breath [237]. Emotional haptic interfaces benefit from an explicit design process, as designers can draw from guidelines on how to consider emotion in haptic experiences.

### Expressive Interpersonal Communication

Touch is extremely important for interpersonal communication, from greeting a new acquaintance with firm handshake, to showing affection to a loved one with a long hug; see Gallace [88] for an overview. Of course, technology can mediate touch between people, *e.g.*, in remote collaboration or shared virtual environments [104]. Brave and Dahley [19] introduced “inTouch”, mechanically linked rollers that enabled playful touch interactions at a distance. ComTouch [41] used pressure input to send vibrations between mobile phones, finding it was used for attention, turn-taking, and emphasis. Hoggan et al. [114] elaborated on these findings: a one month-study found users sent “Pressages” (pressure messages) both for greetings and to emphasize speech or emotional messages. Chan et al. [39] used VT icons to coordinate turn-taking in an online system, featuring an extensive design process to create and perceptually verify icons that present system state and requests with varying urgency. A design step can help build languages for communication, providing the right haptic words for users to express themselves.

## Notification

Mobile contexts are rife with opportunities for haptic feedback. Ambient tactile displays can provide awareness and alerts without distracting the user. Because VT feedback is affordable and low-power, it can be added to watches and wristbands [7, 27], belts, vests, and other wearables. Haptic icons [166] are analogous to visual icons but transmitted through touch. Tactons [25] are a type of haptic icon which provide VT feedback, *e.g.*, in mobile applications. Rhythm opens up a large, learnable design space; Ternes and MacLean [264] found users could learn up to 84 different rhythmic icons. A 28-day study showed that rhythmic VT icons do not disturb users in daily activities and can communicate ambient information [37]. Hemmert and Joost [112] explored a life-like metaphor of pulsing and breathing to provide alerts, but found that designers needed to take care to not be annoying. Multiple actuators can be combined in mobile handheld devices to provide differentiable spatial information, enriching the VT icon design space [280]. VT icons produced by phones can represent multiple levels of urgency and the source of an alert (*e.g.*, voice call, text message, or multimedia message) [24]. A haptic designer can help select an appropriate notification set for diverse applications in both mobile and non-mobile contexts.

## Guidance

Guidance, providing directional or timing information, is a typical application for VT feedback, which can be invisible, mobile, and accessed without using vision or sound. Spatial guidance through haptic wearable display can improve navigation with multiple actuators across several form factors, including belts [162, 204], wrist-bands [7], and vests [206]; in each case, the vibrations inform the user where to go with spatial vibrations or metaphorical spatial icons. Periodic vibrations can guide a user's walking speed without large attentional demands [142]. Tactile illusions like saltation can provide directional information for guidance [262]; larger back-based displays are effective for guiding both attention and direction, *e.g.*, in automobiles [260]. Brewster and Constantin [21] used VT icons to provide awareness of nearby friends and colleagues. Design helps find the right way to guide the user.

## **Education**

Haptic technology has the potential to improve educational resources, especially to those lacking resources. Montessori methods have long espoused the value of physical learning aids, especially using physical *manipulatives* [184]. There is evidence to support these techniques: in a meta-analysis of 55 studies, Carboneau et al. [34] found that physical manipulations improve several learning outcomes, with influence from other instructional variables. Studies of gestures have also found value in students “being the graph” by physically acting out mathematical shapes, grounding abstract knowledge in embodied experience [93]. These techniques have roots in constructivist learning, where learners use existing understandings as a *transitionary object* to understand new concepts [200].

Haptic technology is well-positioned to support embodied learning, and there is early evidence for its efficacy. Haptic feedback has been shown to improve temporal aspects when training motor skills [80]. In a study for molecular chemistry education, Sato et al. [221] found students had higher test scores when they interacted with their haptic learning interface; students reported engagement. In Chapter 7 we describe results from an early learning interface for low-cost haptic displays [198], showing that haptic technology can improve engagement and make lasting impressions. Students can act as designers when learning through creative problem-solving; lessons require carefully designed feedback to engage students without distracting them.

## **2.3 Non-Haptic Design and Creativity Tools**

Design thinking is a process and approach to solving problems. Although often used without a definition [291], design thinking always involves rapidly generating and evaluating multiple ideas, and iteratively exploring a problem space by articulating and manifesting a solution space; ideas then converge to a final developed concept (or set of concepts) [30]. Design is increasingly studied as a field in non-haptic contexts, providing both guidelines and inspiration for HaXD. In this section, we present related work on general design thinking organized into three major elements: problem preparation, hands-on design, and collaboration. We then briefly discuss the relationship between design and research.

### 2.3.1 Problem Preparation

Creative tasks, like design, are often defined as the recombination of existing ideas, with a twist of novelty or spark of innovation by the individual creator [271]. Also known as the “problem setting” [235], “analysis of problem” [271], or “collect” [244] step, problem preparation involves getting a handle on the problem, drawing inspiration from previous work. Schön demonstrated that designers initially frame their problems before developing a solution [235]; he also describes the designer’s repertoire, their collected experience, which aids in design. External examples are especially useful for inspiration and aiding initial design [30, 113]. In our work, the design activity of *browse* overlaps significantly with problem preparation.

### 2.3.2 Hands-On Design

Thinking is not relegated to the head, but situated in the physical world [118]. The designer must iteratively generate a varied set of initial ideas (ideation) and then prune them (evaluation), repeating this step many times to settle on a single design [30]. Working with multiple ideas simultaneously is a boon to good design. Developing interfaces in parallel can facilitate generation and evaluation, delaying commitment to a single design [106, 211], while in groups, sharing multiple designs improves variety and quality of designs [67].

Sketching supports ideation, evaluation, and multiple ideas, allowing the designer to explicitly make moves in a game-like conversation with the problem [235]. It is so important that some researchers declare it to be the fundamental language of design, like mathematics is *said to be* the language of scientific thinking [51]. The power of sketching, according to Cross, is contained in its ability to describe a partial model of a proposed design or problem. Detail can be subordinated, allowing a designer to zoom-in, solve a problem, and then abstract it away when returning to a high-level view. This has implications for software tools: designers must easily navigate the design space with undo, copy and paste, and a history of progress, creating tools with a “high ceiling” and “wide walls” [211]. We use the term “sketching” in a broad sense, including both pencil and paper and software or hardware sketches [30, 185]. Our design activity of *sketching* refers to exploration and demonstration as distinguished from iterative *refinement*. In other

works, sketching can encompass iteration, annotation, and some level of refinement.

### 2.3.3 Collaboration

Design is a collaborative process. Working in groups has the potential for generating more varied ideas [271] than working individually, and is important for creativity support tools [211, 244]. Although sometimes group dynamics influence the design process negatively, proper group management and sharing of multiple ideas results in more creativity and better designs [113]. Shneiderman in particular has championed collaboration in design [244], and suggests two different types of collaboration to be supported by creativity tools: relating, informal discussions with colleagues, and donating, disseminating information to the public/annals of time. Orthogonal to these intended purposes (relating and donating) is the collaboration context. Computer-supported collaborative work often separates interactions into four contexts ordered into two dimensions: collocated (same location) or distributed (different locations), and synchronous (simultaneous) or asynchronous (at different times) [75]. This distinction is useful for scoping challenges facing HaXD: touch is proximal and context-dependent, inhibiting asynchronous and remote collaboration. We explore informal collaboration briefly in Chapter 3, and explore aspects of *sharing* in more detail in Chapters 6 and 7. Chapter 8 characterizes how professional haptic designers collaborate.

### 2.3.4 Design Research

The HCI community is actively exploring the relationships between design and research. Both are intertwined for interactive systems. Current discourse revolves around how HCI research can draw knowledge from design methods, and how knowledge gained from research can inform design practice.

Frayling [86] challenges popular stereotypes about design, art, and scientific research. He suggests three different different relationships: research *into* design (and art), research *through* design, and research *for* design. Research into design is common, including historical research, aesthetic or perceptual research, and perspectives or theories about design. Research for design is “small ‘r’” research, and

includes the gathering of reference materials, examples, and previous artifacts to support the design of a product or experience, not for knowledge creation. Research through design (RtD) involves practicing design with the explicit goal of creating research, including materials research by creating artifacts, customizing or developing technology, or action research.

Zimmerman et al. [291] suggests RtD as a model to involve design into HCI research. Designers can be involved in knowledge-making by attempting to "make the right thing." Knowledge is embedded into artifacts and the process of their creation, integrating both "true" and "how" knowledge. To develop RtD into a more formal methodology, Zimmerman et al. [292] conducted interviews with leading HCI design researchers and found that design projects in a research context can serve as a common vocabulary between researchers and inspiration for future projects. Gaver [91] points out that RtD fits into scientific paradigms by supporting theory development, but cautions against too much formalization of this methodology. Instead, Gaver argues that diversity of design approaches is a virtue, and that annotated portfolios may uphold design's advantages while providing reusable knowledge.

Consistently, design is proposed as a means to progress solving "wicked problems" [214]. The core value of design in research is its ability to resolve between these ill-posed problems and potential solution spaces. Sketching and prototyping remain core techniques to interactively have a dialogue with a problem [235], but this can happen when design embedded within a research context: "design-oriented research")[78]. In this dissertation, we use RtD to explore the problem space of creating HaXD support tools (Chapters 3-6), and in practicing HaXD as a designer (Chapter 7).

## 2.4 Previous Efforts for Haptic Experience Design

We are not the first to look into haptic media production or to apply design thinking to haptic design. While we present a cohesive look on HaXD process linked to general guidelines for HaXD support tools, previous work has developed interactive software tools, supportive software and hardware platforms, and conceptual frameworks to facilitate HaXD.

### **2.4.1 Interactive Software Tools**

As long as designers have considered haptic effects for entertainment media, they have needed compositional tools [102]. Here, we report on interactive software tools for editing haptic sensations.

#### **Track-based editors**

Many user-friendly interfaces help designers create haptic effects. The Hapticon editor [76], Haptic Icon Prototyper [257], and posVibEditor [219] use graphical mathematical representations to edit either waveforms or profiles of dynamic parameters (torque, frequency) over time. H-Studio [60] enables editing of multi-DOF force feedback for video. A less orthodox approach is the Vibrotactile Score [157], which uses musical notation. The Vibrotactile Score was shown to be generally preferable to programming in C and XML, but required familiarity with musical notation [155]. In industry, editors like the D-Box Motion Code Editor overlay visual and audio content with haptics, and allow designers to generate, tune and save frame-by-frame haptic content. Vivitouch Studio allows for haptic prototyping of different effects alongside video (screen captures from video games) and audio, and supports features like A/B testing [258]. While most existing editors focus on vibration effects or simple forces, other types of actuation are now receiving attention, *e.g.*, the Tactile Paintbrush creates friction profiles for the TPad [180].

#### **Mobile Design Tools**

Mobile tools make haptic design more accessible. The Demonstration-Based Editor [117] allows control of frequency and intensity by moving graphical objects on a touchscreen. Similar to the SPIN lab’s Haptic Instrument (mHIVE, Chapter 3), this mobile tool was shown to be intuitive and easy to use for exploration or communication, but faltered when refining more elaborate sensations. Commercially, Apple’s end-user vibration editor has been present in iOS since 2011 (iOS 5) but only produces binary on/off timing information; Immersion Touch Effects Studio lets users enhance a video from a library of tactile icons on a mobile platform.

## **Automatic Generation**

One approach is to use camera motion sourced from accelerometers [58] to actuate audience members’ hands and head in a HapSeat [59, 61]. Several studies have looked into automatic conversion from audio streams [40, 119, 156] or video streams [144] to VT or force-feedback output. Automatic techniques can be combined with later editing to populate a design before a designer works with it.

## **Multi-actuator Tools**

The control of multi-actuator outputs has been explored by TactiPED [199], Cuartielles’ proposed editor [55], and the tactile movie editor [145]; the latter combined spatial and temporal control using a tactile video metaphor for dense, regular arrays of tactile pixels (“taxels”), including a feature of sketching a path on video frames. However, these approaches embrace the separate control of different actuators, rather than a single perceived sensation produced by the multi-actuator device, which we address with tactile illusions in Chapter 4.

### **2.4.2 Platforms**

Prototyping platforms help users rapidly build haptic effects. We first report software platforms, then hardware.

## **Software Libraries**

There are many software libraries to support developers. Some are collections of effects available to designers. The UPenn Texture Toolkit contains 100 texture models created from recorded data, rendered through VT actuators and impedance-type force feedback devices [56]. The HapticTouch Toolkit [153] and Feel Effect library [128] control sensations using semantic parameters, like “softness” or “heartbeat intensity” respectively. VibViz is an online tool organizing 120 vibrations into perceptual facets [240]. Vibrotactile libraries like Immersion’s Haptic SDK ([immersion.com](http://immersion.com)) connect to mobile applications, augmenting Android’s native vibration library. Collections of effects can help a designer start their design, but few are open and modifiable, which we establish as a valuable feature in Chapter 5.

Other software libraries facilitate programming. Force feedback devices have mature APIs like CHAI3D ([chai3d.org](http://chai3d.org)), H3D ([h3dapi.org](http://h3dapi.org)), and OpenHaptics ([geomagic.com](http://geomagic.com)). Immersion’s TouchSense Engage is a software solution for vibration feedback for developers. The Haptic Application Meta Language (HAML) [70] is an XML-based data format for adding haptics to MPEG-7 video, eventually augmented with the HAML Authoring Tool (HAMLAT) [71]. Abdur Rahman et al. [1] adapted an XML approach to YouTube, and Gao et al. [90] developed related online MPEG-V haptic editing. Programming is extremely flexible, but are abstract; designers are usually not able to feel what they design.

### **Hardware Prototyping Platforms**

Hardware prototyping platforms speed physical development. Arduino ([arduino.cc](http://arduino.cc)) is a popular open source microcontroller and development platform with a dedicated editor. Phidgets ([phidgets.com](http://phidgets.com)) facilitate rapid hardware prototyping with over 20 programming languages [96]. More recently, Wooden Haptics gives open-source access to fast laser cutting techniques for force feedback development [85]. These platforms, especially Arduino, have made significant improvements to enable rapid iteration and hardware sketching. We can do better: these platforms require programming, hardware, and haptics expertise, and include inherent time costs like compilation, uploading, and debugging.

#### **2.4.3 Conceptual Tools**

Design can be supported by having a good metaphor to frame it. Here, we report on different ways to approach a haptic design: higher-level perspectives, metaphors for designers, and the language of touch.

#### **Perspectives**

Some higher-level perspectives offer outcome targets or design attitudes to guide haptic practitioners. “DIY Haptics” categorize feedback styles and design principles [110, 167]. “Ambience” is proposed as one target for a haptic experience [170]. Haptic illusions can serve as concise ways to explore the sense of touch, explain concepts to novices and inspire interfaces [108]. “Simple Haptics”, epit-

omized by *haptic sketching*, emphasizes rapid, hands-on exploration of a creative space [185, 186]. Haptic Cinematography [63] uses a film-making lens, discussing physical effects using cinematographic concepts. Haptics courses are taught with a variety of pedagogical viewpoints, including perception, control, and design; they provide students with an initial repertoire of skills [134, 196].

### **Metaphors for design**

Haptics has often made use of metaphors from other fields. Haptic icons [166], tactons [20], and haptic phonemes [77] are small, compositional, iconic representations of haptic ideas. Touch TV [183], tactile movies [145], haptic broadcasting [38], and Feel Effects [128] attempt to add haptics to existing media types, especially video. Haptic Cinemotography [62, 63] uses a film-making lens for haptic-augmented multimedia, including basic principles of composition when combined with video [99].

Musical analogies have frequently been used to inspire haptic design tools, especially VT sensations. The Vibrotactile Score, a graphical editing tool representing vibration patterns as musical notes, is a major example [155, 157]. Other musical metaphors include the use of rhythm, often represented by musical notes and rests [23, 26, 39, 264]. Earcons and tactons are represented with musical notes [20, 22], complete with tactile analogues of crescendos and sforzandos [25]. The concept of a VT concert found relevant tactile analogues to musical pitch, rhythm, and timbre for artistic purposes [102]. Correspondingly, tactile dimensions have been also been used to describe musical ideas [72]. Though music lends its vocabulary to touch, non-temporal properties remain difficult-to-describe.

### **Language of Touch**

The language of tactile perception, especially affective (emotional) terms, is another way of framing haptic design. Many psychophysical studies have been conducted to determine the main tactile dimensions with both synthetic haptics and real-world materials [76, 193]. Language is a promising way of capturing user experience [191], and can reveal useful parameters, e.g., how pressure influences affect [289]. Tools for customization by end-users, rather than expert designers,

are another way to understand perceptual dimensions [239, 240]. However, this work is far from complete; touch is difficult to describe, and some even question the existence of a tactile language [131]. In this dissertation, we encounter the language of touch in some chapters (Chapter 3, Chapter 6). However, we approach our design tools without an imposed language, giving designers fast, powerful control over low-level parameters like frequency and amplitude.

## 2.5 Methodology

We used a mixed-method approach to the work presented in this dissertation. We combined **research through design** with qualitative and quantitative analysis to gather complementary information. The particular blend of methods depended on **the** project. We began with design and qualitative techniques to gather rich, generative data from design tools. We then iteratively refined our qualitative methods, and built towards large-scale data collection for our generated theories with quantitative analysis and deployed tools.

We began our research process using **research through design** [291]. Beginning with design allowed us to iteratively frame our questions [292] while generating initial theories [91]. In addition, by building usable support tools, we gained direct knowledge of how to work haptic devices. A design approach is constructive; working tools exactly specify design ideas, can be shared with haptic designers as a practical contribution, and provide an extendable platform to facilitate future research. For example, implementing Tactile Animation informed how to architect Macaron, which we could then directly extend as MacaronBit (Section 7.5)

Qualitative research methods let us **study complex** phenomena in flexible, rigorous way. They are generative, supporting building a hypothesis from observations with few theoretical assumptions. Qualitative frameworks support diverse, rich data, including observational findings, interview, and screen-captured video. This data helped us capture the experience of HaXD and develop guidelines for iteration on our tools' early implementations. We drew from two methodologies in our qualitative studies: phenomenology and grounded theory.

Phenomenology is both a philosophical tradition and a social science methodology based upon that tradition that involves the study of subjective experience.

We used Moustakas [187] as our primary guide through both, as it focuses on practical methodological concerns but provides a strong philosophical background; Creswell [50] provided an overview of various methodologies and resources for phenomenology. Phenomenology as a methodology has been used in psychology to investigate topics ranging from visual illusions to tactile experience [50, 191, 212]. In this work, we specifically use the Stevick-Colaizzi-Keen methods as described by Moustakas [187]. This technique handles textual data: transcripts are divided into non-overlapping, non-redundant statements about the phenomenon known as Meaning Units (MUs). MUs are then clustered into emergent themes through affinity diagrams, writing and re-writing of thematic descriptions, and reflection guided by phenomenological philosophy. **Because HaXD is not a commonly experienced phenomenon, we drew from phenomenological methods to examine the limited experiences of in-lab stimuli.** This approach is similar to previous work on sensory perception, *e.g.*, geometric illusions [212], or mid-air tactile displays [191]. In our case, we studied the experience of design haptic sensations **using our provided design tools.**


Grounded theory is another well-known methodology first described by Glaser and Strauss [94]. We adopted the more flexible methodology described by Corbin and Strauss [49], as it allowed us to integrate with our phenomenological methods. We principally adapted the methods used in grounded theory, specifically, memoing (writing about each focused quotation), constant comparison (comparing each new memo and codes to previous ones), and open and axial coding (creating codes, or concepts, linking them together, then categorizing statements or observations based on codes). These techniques facilitated video analysis in Chapter 4 and Chapter 5, and allowed for quantitative count-based data and simple statistics to complement our interview-based findings. **Section A.2 provides examples of intermediate products from analysis in Chapter 5.**

While some design scholars employ qualitative techniques [52, 53, 235], others have developed quantitative techniques. Statistical analysis and other quantitative methods can analyze large data sets and complement qualitative research questions. When studying graphic design for ads, Dow et al. [67] used ratings by experts as well as click-through rates and other online analytics for actual deployed ads from their study. Kulkarni et al. [149] used MTurk to generate sketches of aliens in

several conditions (of exposure to examples), then deployed another MTurk task to label each drawing with features like antennae or feet. Lee et al. [154] had end-users rate graphic designs in both an in-lab study and over Mechanical Turk, and recorded time participant designers spent on each component. Large-scale online studies are currently not available for haptic technology, which requires data collection infrastructure. As we started to use quantitative data, we also began to build this infrastructure using an online editor with analytic logs in Macaron (Chapter 5) and examining the potential for crowdsourced feedback with HapTurk (Chapter 6). While a valuable goal, large-scale quantitative feedback on HaXD remains outside the scope of this dissertation.

## Chapter 3

# Sketch: The Haptic Instrument

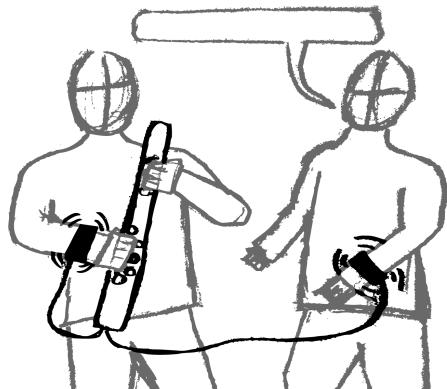

**Figure 3.1:** Concept sketch of a haptic instrument. Both users experience the same sensation, controlled in real-time.

**Preface** – The haptic instrument case study<sup>1</sup> was the first of our three vibrotactile design tools. We studied the role of real-time feedback and informal, synchronous collaboration on HaXD using musical instruments as inspiration and participants with haptics experience as proxies for haptic designers. We built a haptic instrument, mHIVE, in a tablet-based interface, and used phenomenology to begin developing our evaluation methods. This study was a small but important first step in our thinking: we found mHIVE was effective for exploration but not refinement, which led to distinguishing the design activities of *sketch* and *refine*.

---

<sup>1</sup>Schneider and MacLean. (2014) *Improvising Design with a Haptic Instrument*. HAPTICS '14.


### 3.1 Overview

As the need to deploy informative, expressive haptic phenomena in consumer devices gains momentum, the inadequacy of current design tools is becoming more critically obstructive. Current tools do not support collaboration or serendipitous exploration. Collaboration is critical, but direct means of sharing haptic sensations are limited, and the absence of unifying conceptual models for working with haptic sensations further restricts communication between designers and stakeholders. This is especially troublesome for pleasurable, affectively targeted interactions that rely on subjective user experience. In this paper, we introduce an alternative design approach inspired by musical instruments – a new tool for real-time, collaborative manipulation of haptic sensations; and describe a first example, mHIVE, a mobile Haptic Instrument for Vibrotactile Exploration. Our qualitative study shows that mHIVE supports exploration and communication but requires additional visualization and recording capabilities for tweaking designs, and expands previous work on haptic language.

### 3.2 Introduction

Haptic feedback has hit the mainstream, present in smartphones, gaming and automobile design, but our knowledge of how to design haptic phenomena remains limited. There are still no agreed-upon vocabularies or conceptual models for haptic phenomena [76, 153, 157, 191], in contrast to other modalities (*e.g.*, using theory of minor chords to evoke a sad emotion in music). For subjective qualities, such as pleasant alerts or frightening game environments, prospects are even more limited. Design is still based on trial and error with programming languages, limiting exploration. The lack of established conceptual models or design frameworks further challenges communication between designers and stakeholders.

Using a music composition metaphor (as in [157]), we are writing music without ever playing a note. Instead, we compose a work in its entirety, then listen to the result before making changes. In contrast, musicians often use their instruments as a tool for serendipitous exploration when designing music and can draw upon musical theory. Furthermore, music is collaborative, with communication facilitated by a reference point of a sound. Touch, however, is a personal, local sense, making

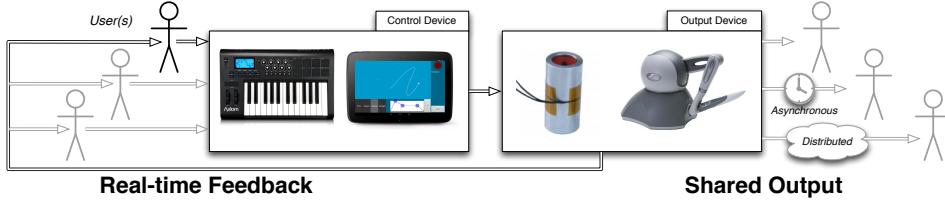

**Figure 3.2:** The haptic instrument concept. One or more people control the instrument, and receive real-time feedback from the device. Any number of audience members can feel the output in real time as well. Control methods can vary, from traditional musical control devices (such as the M-Audio Axiom 25, used in preliminary prototypes) to touchscreen tablets (used in mHIVE). Output devices vary as well.

it difficult to discuss stimuli.

Facilitated exploration and collaboration should streamline the haptic design process and inform a guiding theory, analogous to those for musical composition. Designers will attain fluency with new devices and control parameters, while collaborative elements will get people designing in groups. A usable haptic language may emerge from their dialogue.

Our approach is to directly address these shortcomings with the development of a *haptic instrument*, inspired by musical instruments but producing (for example) vibrotactile sensations rather than sound (Figure 3.1). Haptic instruments have two main criteria: they provide real-time feedback to the user to facilitate improvisation and exploration, and produce haptic output to multiple users as a *what-you-feel-is-what-I-feel* (WYFIWIF) interface. This allows for a dialogue that includes a haptic modality: haptic instruments create a shared experience of touch, allowing for a common reference point. We developed a vibrotactile instance, mHIVE (mobile Haptic Instrument for Vibrotactile Exploration), as a platform to investigate this concept. Our main contributions are:

- A definition of the haptic instrument concept & design space.
- A fully-working haptic instrument (mHIVE).
- The novel application of an established psychological methodology, phenomenology, to investigate mHIVE's interface and subjective tactile experi-

ences.

- Preliminary results from a qualitative study that show mHIVE supports exploration and collaboration, and implications for the design of future haptic design tools.

In this paper, we first cover the related work of haptic design tools and haptic language, then define the haptic instrument, its requirements, features, and design space. We report the design of mHIVE, our methodology, and preliminary results, and conclude with future directions for haptic tool design and research into a haptic language.

### 3.3 Related Work

We cover previous work related to musical metaphors for haptic design, other tools for haptic design, and the language of haptics.

#### 3.3.1 Musical Metaphors in Haptic Design

Musical analogies have frequently been used to inspire haptic design tools. The vibrotactile score, a graphical editing tool representing vibration patterns as musical notes, is an example of controlling vibrotactile (VT) sensations [155, 157]. The vibrotactile score provides an abstraction beyond low-level parameters and can draw from a musician’s familiarity with the notation, but we can take this idea further: when writing a song, a musician might improvise with a piano to try out ideas. We are inspired by the vibrotactile score and musical instruments, but define haptic instruments as a more general concept than literal musical instruments for touch.

Other musical metaphors include the use of rhythm, often represented by musical notes and rests [23, 26, 39, 264]. Tactile analogues of crescendos and sforzandos have proven valuable to designing changes in amplitude [25]. Indeed, Brewster’s original earcons and tactons were represented with musical notes [20, 22]. The concept of a vibrotactile concert or performance was explored to identify relevant tactile analogues to musical pitch, rhythm, and timbre for artistic purposes [102]. As well, tactile dimensions have been used to describe or map to musical ideas [72]. Musical concepts have been widely used in the design of vibrotactile

sensations, which we draw upon when designing mHIVE.

### 3.3.2 Other Haptic Design Approaches

Many tools have been developed to make it easier to work with the physical parameters of a haptic device. The Hapticon Editor is a graphical software tool that allows direct manipulation of the waveform for vibrations [76], and in another approach, piecing together of smaller iconic idioms [257]. This idea is best encapsulated by “haptic phonemes”, the smallest unit of meaningful haptic sensations that can be combined [77]. A similar approach was used with TactiPED, a graphical metaphor for control of wrist-based actuators, by controlling the low-level parameters of frequency, amplitude, and duration [199]. Haptic instrument parameters can be low- or high-level, but we use similar parameters with mHIVE.

Non-graphical approaches have also contributed to haptic design. Programming has benefitted from the use of toolkits such as HapticTouch, which uses higher-level descriptors (“Softness”, “Breakiness”) to control tangibles [153]. Though a promising direction, the vocabulary is not empirically grounded, and developers still have to deal with physical parameters. Hardware sketches and designing through making are also important approaches, since the immediate feedback of being able to feel haptics is crucial [186].

### 3.3.3 Haptic Language

Investigation into the language of tactile stimuli has a long history in psychological studies [193]. Many psychophysical studies have been conducted using factor analysis or similar approaches to determine the main tactile dimensions [193], but these have looked at materials rather than synthesized vibrotactile sensations, and have primarily been deductive (evaluating a pre-determined set of terms) rather than inductive (asking participants to describe sensations without prompting). Other work has shown little consensus on constant meanings for difference tactile dimensions, or whether a tactile language even exists [131]. There is a clear need to empirically investigate the subjective experience of touch-based interfaces, for which phenomenology is ideal [50, 187].

Our study is perhaps most closely related to Obrist, Seah, and Subramanian’s

work on the perception of ultrasound transducers [191]. Their study examined the language used to describe two different sensations, one oscillating at 16 Hz and the other at 250 Hz. Though they also used phenomenology, our study differs in two important ways: we explore vibrotactile sensations rather than ultrasound, and give our participants a way of controlling the phenomenon directly, allowing for more coverage of the stimulus design parameters. A more deductive approach by Zheng and Morell also looked at how pressure and vibration actuators influenced affect, noting that affect influences attention, and documented qualitative descriptions of the sensations [289].

### 3.4 Defining the Haptic Instrument

We define a haptic instrument as a tool for general manipulation of one or more haptic (tactile, force-feedback, or both) devices that provides real-time feedback to anyone controlling the device, and can produce identical shared (WYFIWIF) output to all users to facilitate discussion and collaboration. Manipulation can include ideation, exploration, communication, recording, refinement, and articulation. Manipulation can be for utilitarian purposes (*e.g.*, designing haptic notifications) or artistic expression (*e.g.*, a haptic performance). Output devices can be purely output, or interactive. Furthermore, although haptic devices must be involved, multimodal experiences could easily be created by combining a haptic instrument with auditory or visual output.<sup>2</sup>

#### 3.4.1 Design Dimensions

There are several main design dimensions that can be considered in a haptic instrument (outlined in Figure 3.2). A haptic instrument can occupy multiple positions on these dimensions.

**Asynchronous/synchronous.** Though a haptic instrument must provide real-time feedback, its collaborative (shared-output) aspect could be either synchronous (by having multiple people experience the real-time output) or asynchronous (by allowing for recording and playback, important for design).

---

<sup>2</sup>One could even imagine a multimodal instrument such as Asimov's Visi-Sonor [8] or its parody, Futurama's Holophonor [87].

**Collocated/distributed.** A haptic instrument’s output could be present only for users in the same room, or be broadcast over a network to people around the world. For example, multiple mobile devices could all display identical output in a distributed manner.

**Private/shared control.** A haptic instrument’s control could be private (operated by a one person at a time) or shared (multiple users control the display). Shared control could be collocated or distributed (*e.g.*, a web interface and shared object model).

**Output mechanism.** Each haptic instrument will control a haptic device, which has its own mechanism for providing a haptic sensation (*e.g.*, vibrotactile sensations). Because haptic devices can be complex and combine multiple mechanisms, this is a large space in its own right. Characterizing the different display mechanisms is something that we must leave to future work. Suffice it to say, a haptic instrument will be different depending on its output device.

**Number of haptic instruments or output devices.** One consideration is whether a haptic instrument is intended to operate alone, or with other haptic/multimodal instruments. One can imagine haptic jam sessions for inspiration and ideation, or even form haptic bands for artistic expression. This is highly related to private/shared control – there is a fine line between several identical haptic instruments with private control, and a single haptic instrument with shared control and several output devices. Note that a haptic instrument may involve several devices to produce shared-output.

**Control mechanism.** Similarly, a haptic instrument could be controlled in a variety of ways. From musically-inspired MIDI controllers to smartphone applications, we envision a wide variety of control methods. Even a real-time programming environment might be appropriate for complex interactive sensations, so long as the control mechanism works with the output device’s paradigm.

We expect that haptic instruments could provide both immediate and long-term value. We hope haptic instruments will improve the design process immediately, by supporting exploration and collaboration. Over time, their use could lead to a natural, emergent design language valuable in its own right. One can also imagine a general tool composed of several virtual haptic instruments, much like digital musical synthesizers.

### 3.5 mHIVE


We developed mHIVE to begin to explore how a haptic instrument should work and what it should do (Figure 3.3). mHIVE is collocated, synchronous, and mostly private in control; it accommodates shared display via dual Haptuators [279] and is operated with a single-touch tablet-based interface (Figure 3.4). We began with vibrotactile design because VT sensations are common, do not require interactive programming, are controlled through waveforms (analogous to music), and their low-level control parameters are well understood. A touchscreen allowed direct manual control.

mHIVE offers real-time control of frequency, amplitude, waveform, envelope, duration, and rhythm, identified as the most important parameters for vibrotactile sensations [20, 25, 26, 102, 215].

The main view controls amplitude (0 to 1) on the vertical axis, and frequency (0-180Hz, determined by piloting) horizontally. Amplitude and frequency were combined because we modeled them both as continuous controls: dynamics of continuous amplitude have been shown to be a salient design dimension [25, 102], and we did not want to choose discrete bins for frequency at this early stage. Further, single-handed control was essential – the other hand is required to feel the output. These axes were labeled to help users understand what they were and to give general sense of the values. A two-dimensional visual trace shows the previous two seconds of interaction history with the main view, intended to provide feedback and aid memory about drawings that were used.

VT duration and rhythm are directly mapped to screen-touch duration and rhythm. In analogy to musical timbre [20, 102], we provided four waveforms: sine, square, rising sawtooth and triangle. Sine and square are distinguishable [102], but we added sawtooth and triangle waveforms to expand the palette.

The attack-decay-sustain-release (ADSR) envelope controls amplitude automatically as duration of the note continues, as a 0-to-1 multiplier of the amplitude displayed on the main amplitude-frequency input. Attack determines the amount of time (in milliseconds) to ramp the amplitude from 0 (none) to 1 (full). Decay determines the amount of time (in milliseconds) to ramp the amplitude from 1 (full) to the sustain level. Sustain determines the amplitude level (from 0 to 1) held as long

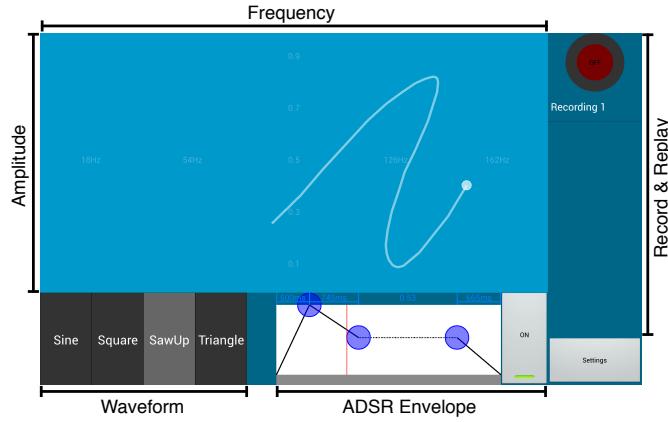

**Figure 3.3:** mHIVE interface. Primary interaction is through the amplitude-frequency view, where visual feedback is provided through a circle (current finger position) and a trail (interaction history).

as the user keeps a finger on the display, playing a haptic note. Release determines the amount of time (in milliseconds) to ramp the amplitude from the sustain level to 0 (none). This envelope is a common feature of synthesized or digital musical instruments, and was noted as particularly useful in the Cutaneous Grooves project [102].

During piloting, we noticed that the ADSR concept was difficult to explain. We thus developed a novel interactive visualization, where the user could change the envelope parameters by dragging circles around. A red line operates as a cursor or playhead, showing the current progress through the envelope, looping around the dotted line when the sustain level is held.

Recording functionality was added to support more advanced rhythms and repetitions, and to allow users to save their sensations for later comparison. The record feature captures changes in frequency, amplitude, waveform, ADSR, and *replayed recordings*, allowing for compound haptic icons to be created. During playback, all changes are represented in the interface as if the user had manipulated them in real-time. At this time mHIVE only produces a single output sensation (with a single waveform, ADSR setting, frequency, and amplitude). Multitouch, layering, and sequencing (automatically playing multiple notes with a single touch) are not supported, as the semantics were too complex for a first design.

mHIVE is implemented in Java using the Android SDK [6], and the FMOD sound synthesis library [84] to produce sounds, sent to two or more Haptuators through an audio jack. We deployed mHIVE on an Android Nexus 10 tablet running Android 4.2.1.

### 3.6 Preliminary Study Methodology

We conducted a preliminary qualitative study to investigate two questions. First, is mHIVE an effective tool for the expression, exploration, and communication of affective phenomena? Second, what language, mental models, and metaphors do people use to describe vibrotactile sensations, and how do they relate to mHIVE’s low-level control parameters?

We collected and analyzed our data using the methodology of phenomenology, an established variant of qualitative inquiry used in psychology to investigate topics ranging from visual illusions to tactile experience [50, 191, 212]. Phenomenology explores subjective experience, appropriate for an investigation into the more intangible qualities of pleasantness and affect. At this point, the rich, inductive data of qualitative analysis is more valuable than a controlled experiment with statistical analysis.

In particular, we use the Stevick-Colaizzi-Keen method as described by Moustakas [187]. In-depth interviews are conducted with a small number of participants. The interviewer, Researcher 1 (R1), also documents his experience, as if he was interviewing himself. Then, R1 transcribes each interview, including his own. Transcripts are divided into non-overlapping, non-redundant statements about the phenomena known as Meaning Units (MUs). This considers every statement that the participants make, and does not discount any due to bias or selective searching. Then, MUs are clustered into emergent themes. We interpret our themes in the Discussion.

#### 3.6.1 Procedure

Our 1-hour open-ended interviews used the following protocol:

1. Ask the participant for their background: occupation, experience with touch-screens, haptics, music, and video games.

2. Demonstrate mHIVE to the user, and invite them to explore while thinking aloud to describe the sensations they feel.
3. Probe the design space by asking participants to explore different control parameters, and to explore their metaphors (*e.g.*, if the participant describes a sensation as “smooth”, R1 would ask them to try to produce a “rough” sensation).
4. Ask the participants to produce sensations for the six basic cross-cultural emotions documented by Ekman [74], and rank how well they think their sensation represents the emotion on a 4-point semantic differential scale (Very Poorly, Somewhat Poorly, Somewhat Well, Well). This was done both as an elicitation device to gather a wider range of interactions with mHIVE, and to directly investigate a design task.
5. Set the Haptuators down, and ask the participants to describe their experience of working with mHIVE in as complete detail as possible to evaluate the device itself.

R1 conducted the interviews and analysis, which required specialized knowledge of mHIVE. Scores of inter-rater reliability common with other qualitative analyses (*e.g.*, grounded theory [49]) are inappropriate and unavailable, as we did not conduct deductive, low-level coding. To improve reliability, R1’s documented experience was analyzed first, and then consulted during analysis to remove bias (*e.g.*, to not use terms only used by the experimenter).

### 3.7 Results

We sought participants with experience designing haptics as a proxy for expert designers for our initial study. Four participants were recruited through email lists and word-of-mouth (P1-4, three male), and were all in the age range of 26-35 with self-reported occupations including graduate students or post-docs in information visualization, HCI, and human-robot interaction). All had experience working with haptic technology, and (because of this requirement) all knew the main researcher in a professional capacity, although only P2 had seen earlier prototypes of the



**Figure 3.4:** Study setup. Both the participant (left) and the interviewer (right) feel the same sensation as the participant controls mHIVE.

haptic instrument. The small sample size, typical for phenomenological studies [50], was appropriate for the rich data we wanted. Data collection ended when we achieved saturation of new results, and had a clear direction for our next iteration.

Here we report the three major themes that emerged during analysis: mHIVE’s success as a haptic instrument, mHIVE’s limitations that reveal more detail about the haptic design process, and the use of language in the study.

### 3.7.1 mHIVE Succeeds as a Haptic Instrument

Our results suggest that mHIVE can be effective for exploration of a design space, and communication in the haptic domain. Overall, mHIVE was well received, seen as a novel and promising tool. “*I definitely liked it*” (P1), “*I think there should be more devices like this for designing haptic icons*” (P2).

**Serendipitous exploration.** Participants reported that mHIVE was best served to explore the design space, generate a number of ideas, and try things out. Serendipitous discoveries and exclamations of surprise were common. Participants were able to “*accidentally stumble upon something*” (P2) as they explored the device. “*I felt I could get a large variety*”, “*I could easily play around with the high-level to find out what was neat*” (P3).

**Communication.** mHIVE established an additional modality for dialogue. The dual outputs created a shared context, demonstrated by deictic phrases: the additional context of the vibrotactile sensation was required to make sense of the statement. The use of “that” and “there”, reminiscent of the classic “Put That

There” multimodal interaction demo [17] indicate a shared reference point was established from the haptic instrument. “*So there’d be like, (creates a sensation on the device), which is pretty mellow*” (P3).

In particular, P4 successfully communicated the sensation of sleepiness to the R1, by asking whether R1 could guess the sensation. “*Can you guess it?*” (P4) “*Sleepy?*” (R1) “*Yeah. Pretty good*” (P4). The dialogue worked as a two way channel, as R1 was able to phrase questions using the device. “*It was different*” (P2) “*How was it different?*” (R1) “*You delayed the first part, it felt new*” (P2).

Certain sensations, like a feeling of randomness, could only be felt when another person controlled mHIVE. “*When someone else does it, I feel better, it’s like, you cannot tickle yourself*” (P2).

### 3.7.2 Tweaking through Visualization and Modification

During analysis, some key directions for future design emerged around visualization and control capabilities.

**Inability to tweak.** Though mHIVE supported exploration and collaboration, we found it was inadequate as a standalone design tool. Few created sensations were considered to be final. Many descriptions were hedged and in the design task, few sensations captured the emotional content well. “*I dunno, maybe that’s afraid?*” (P1), “*Still felt that you can make them better*” (P2), “*To me that’s more fuming (laughing) than it is angry*” (P3). On some occasions, participants were certain about their descriptions. “*Sad, definitely down on the amplitude with sad... oh that’s totally sad. Yeah.*” (P1). This was uncommon, and usually tied to discovering an ideal sensation during the design task.

**More visualization and recording.** Part of mHIVE’s inability to support tweaking was due to cognitive limitations for both memory and attention. Participants found it difficult to remember what they had tried before, and to pay attention to the output while simultaneously controlling it. “*There’s a lot of variables which, when I’m trying to compare between two configurations... it was hard sometimes to remember what I had tried*” (P3), “*I definitely liked being able to feel a stimulus without having to implement it, you know, it allows me to focus more on what it feels like*” (P1).

Participants suggested that although visualization and recording features helped somewhat to overcome these limitations, more was needed. All requested greater emphasis on recording through repetition or looping, both to aid memory and allow for focus on the sensation independent of device control.

Allowing persistent, modifiable sensations and alternative visualizations could also help participants overcome these limitations. “*The recording records what I do, but it’d be nice to have it repeat stuff*” (P3), “*It might conceivably be nice to be able to, you know, draw a curve, draw a pattern, draw like you would in paint, and then be able to manipulate it, replay it, move the points, see what happens*” (P1).

### 3.7.3 A Difficult Language

Our study was too small to analyze language patterns in detail, but exposes emerging trends.

**Pleasantness, ADSR, and frequency.** Participants often started with a statement of like or dislike rather than a description. Pleasant sensations often involved the ramp-in and ramp-out (“echo” or “ringing”) of the ADSR envelope, or lower-frequency sensations. Longer, higher frequency without ramp-in and ramp-out were less pleasant. “*I don’t know how else to describe it, I kinda like it*” (P1), “*Yeah, this [ADSR] seems natural, somehow*”, “*It feels unnatural to kill the echo right away*” (P2), “*I like this [low-frequency] sensation cuz to me it feels a lot like purring*” (P3).

**Waveform.** Participants all noticed differences between waveforms, but were often challenged in expressing them (P4 used the musical term “timbre”). Square waves in particular were distinct, with a greater range and stronger affinity to mechanical sensations. “*It’s interesting, they feel more different than I thought they would*” (P1), “*If you want to make something feel like a motorcycle, you would definitely need square wave*” (P2).

**Aural/haptic metaphors drawn from previous experience.** For the most part, participants used concrete examples and direct analogies to describe sensations, often drawn from their previous experiences. One stand-out strategy employed by all participants was onomatopoeias: “*beeeooo*” (P1&4), “*vroom*” (P1), “*bsheeeooo*”, “*boom*”, “*neeeeaa*”, “*mmmMMmmmm*” (P2), “*pa pa pa pa*”, “*tum*

*tum tum tum*”, “*tumba tumba tumba tumba*” (P3); “*upward arpeggio, like, (singing with hand gestures) na na na naaa*” (P4). Other sound-based metaphors were very common, including hum, buzz, whistle, rumble (P1); bell (P1, P2); squeaky, creak (P2); or thumpy (P3). Still other descriptors were directly haptic in nature: rough, flat (P1); sharp, round, ticklish (P2); sharp, smooth, cat pawing (P3); impatient foot tapping (P4).

## 3.8 Discussion

Here we interpret these themes to draw implications for haptic design tools, and compare to research on the language of haptics. We then reflect upon our methodology and limitations.

### 3.8.1 Design Tools

mHIVE was able to achieve the two main goals of a haptic instrument, facilitating both exploration and collaboration. Participants were clearly able to explore the different low-level parameters, and encountered serendipitous or unexpected sensations through improvisation. mHIVE created a shared experience that facilitated communication between R1 and the participants. We can thus conclude that haptic instruments are a promising new tool in a haptic designer’s arsenal, with a first, successful implementation in mHIVE.

However, the second theme shows that serendipity and communication are only part of the equation. mHIVE does not serve as a general editor of haptic sensations. In particular, participants found their attention split when controlling the device and feeling the sensation; perhaps the real-time control should allow for a rapid, but not instantaneous, switch in focus between control and perception. More generally, participants were unable to tweak sensations because there was insufficient support for comparing ideas or evolving an existing idea.

In hindsight, this general difficulty is understandable given the broader context of the musical instrument analogy we used for inspiration. Musical instruments are not used to write songs on their own, but combined with notation or recording media. A similar combination of a haptic instrument and recording might be described more succinctly as a *haptic sketchpad*. Sketching is critical in design

because it allows for the evolution of an idea through multiple sketches, as well as criticisms, comparisons, and modifications [53]. Emphasizing a history feature that supports multiple versions of sketches, the user could develop an idea as if with a multiple pages in a sketchbook. Haptic sketching in hardware has already been shown to be effective [186]. As well, a visual metaphor resonates with the desire for more effective visualization.

Ultimately, haptic instruments may be most useful as one element in a suite, or component of a more general tool. A haptic instrument could complement a graphical editing tool that does support tweaking, such as the vibrotactile score [155, 157] or the hapticon editor [76]. As part of a more comprehensive tool, mHIVE could be improved to reduce cognitive barriers to memory and attention. Alternatively, we could add functionality to mHIVE to support looping, visualization, and direct manipulation of the sensations within the tool. We will explore these options as we iterate on mHIVE’s design in future work.

### 3.8.2 Language

Our preliminary results for language are compatible with the literature, supporting previous work. Participants’ readiness to say whether a sensation was pleasant or not supports the view that touch is affective in nature, and that knowing what one likes or doesn’t like is a primary function of touch [131]. ADSR pleasantness and high-frequency unpleasantness are both consistent with the literature: Zheng and Morell note that ramped signals influenced affect more positively than step signals, and 3s high-frequency sensations were annoying or agitating [289]. The heavy use of onomatopoeias is reminiscent of Watanabe *et al.*’s work with static materials [272]. However, in our study, onomatopoeias were often used to express dynamic sensations (beeeeooo being a gradual decrease in amplitude and frequency), which might be a useful direction for future work.

### 3.8.3 Methodology and Limitations

Although phenomenology is uncommon in the haptics community (excluding [191]), we found it to be an effective way to empirically examine the subjective experience of using mHIVE. Because the community is still developing processes and tasks

for haptic design, qualitative studies seem to be an especially appropriate way to tackle these problems. Once we have further defined haptic design, we can then move to more task-based, experimental methods.

Our study was a first round of feedback to inform our next iteration, and has limitations. First, our participant pool is (intentionally) small, and participants were all collected through our professional network, as people with haptic design experience are rare. As we continue to tackle the problem of haptic design, we hope to seek out a larger and more diverse pool of participants, and explore more realistic design tasks.

### 3.9 Conclusion

In this paper, we have introduced the concept of the haptic instrument, a new tool for haptic designers that supports serendipitous exploration and collaboration. We described the implementation of mHIVE, a mobile Haptic Instrument for Vibrotactile Exploration, with design decisions drawn from the literature. Our findings suggest that haptic instruments are effective tools for improvised exploration and collaboration, but only support part of the design process. Additional tools or features are required to support tweaking. Finally, we reported the use of language when interacting with mHIVE, expanding upon several conclusions in the literature.


We believe this to be a step towards a greater goal, the establishment of haptic design as its own discipline, with processes, tools, and best practices. Future work will build on this base as we continue to examine the haptic design process. We will consider a haptic sketchpad concept as one way to overcome the cognitive barriers, and allow users to tweak their designs. We also hope to apply haptic instruments and other tools in more realistic design scenarios. By supporting designers at this critical point, we can continue to make haptics more valuable than ever.

### 3.10 Acknowledgments

This work was supported by NSERC and approved by UBC’s Behavioural Research Ethics Board (#H13-01620). We are very grateful to our participants.

# Chapter 4

## Refine: Tactile Animation

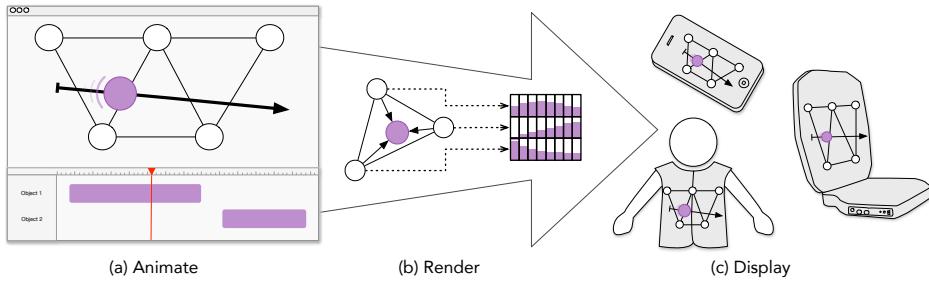

**Figure 4.1:** Concept sketch for tactile animation. An artist draws an animated sequence in the user interface and the user experiences phantom 2D sensations in-between discrete actuator grids.

**Preface** – In this second case study<sup>1</sup>, we iterated on our findings from the haptic instrument to build a full authoring tool that supported both *sketching* and *refinement*. This work expanded to spatial vibrotactile designs with professional non-haptic media designers. We surveyed critical haptic authoring tool features and developed a full rendering pipeline for the tactile animation object, an abstraction able to handle diverse spatial vibrotactile arrays. We evaluated the implemented tool, Mango, with both phenomenology and methods from grounded theory and iterated on our study tasks. Professional animators transferred their non-haptic de-

<sup>1</sup>Schneider, Israr, and MacLean. (2015) *Tactile Animation by Direct Manipulation of Grid Displays*. UIST '15.

sign skills to both explore (*sketch*) and iterate (*refine*), but missed features to reuse design elements and gather inspiration from examples. This theme, also glimpsed in Chapter 3, led to the third design activity: *browse*, which we cover in Chapter 5.

## 4.1 Overview

Chairs, wearables, and handhelds have become popular sites for spatial tactile display. Visual animators, already expert in using time and space to portray motion, could readily transfer their skills to produce rich haptic sensations if given the right tools. We introduce the *tactile animation object*, a directly manipulated phantom tactile sensation. This abstraction has two key benefits: 1) efficient, creative, iterative control of spatiotemporal sensations, and 2) the potential to support a variety of tactile grids, including sparse displays. We present Mango, an editing tool for animators, including its rendering pipeline and perceptually-optimized interpolation algorithm for sparse vibrotactile grids. In our evaluation, professional animators found it easy to create a variety of vibrotactile patterns, with both experts and novices preferring the tactile animation object over controlling actuators individually.

## 4.2 Introduction

Haptic feedback is viewed today as a key ingredient of immersive media experiences. Body-moving devices in theatre seats, ride vehicles, and gaming platforms can tilt, translate, and shake the user for increased engagement. Recently, arrays of multiple actuators have been developed to display expressive, spatial sensations on the skin [59, 126, 145, 250, 275].

Vibrotactile (VT) arrays, which stimulate the skin through vibration, are common in diverse applications from immersive gaming chairs [126] to wearable vests for mobile awareness [135]. These displays typically employ sparse actuator arrangements to reduce cost and power requirements, using perceptual illusions to create continuous sensations [4, 125, 242]. Unfortunately, adoption of VT arrays is limited by a lack of authoring tools. Most only support a single actuator [76]; those that accommodate multiple actuators control each separately [145, 199, 258], cumbersome for non-adjacent actuators.

To remedy this, we propose the *tactile animation object*, an abstract, directly manipulable representation of a phantom sensation perceived in-between physical actuators. With this approach, designers can efficiently and creatively explore ideas and iterate without worrying about underlying actuator arrangements. As long as a rendering algorithm can be developed, this abstraction not only facilitates design, but is compatible with a variety of form factors and technologies.

In this paper, we describe the tactile animation object and implement it in *Mango*, a tactile animation tool and pipeline (Figure 4.1). Our contributions are: 1) A tactile animation interface grounded in user interviews and prior literature. 2) A rendering pipeline translating tactile animation objects to phantom sensations on sparse, generalized VT arrays, optimized with a perceptual study. 3) An evaluation with professional animators showing accessibility and expressivity. 4) An exploration of potential applications for tactile animation.

## 4.3 Background

### 4.3.1 Haptic Entertainment Technologies

Haptic feedback was used in cinema as early as *Percepto*, a 1959 multisensory experience for the movie “The Tingler” [122] with theater seats that buzzed the audience at strategic moments. Current 4D theaters, rides, shows, and gaming arcades are equipped with sophisticated motion platforms (e.g., D-Box, [www.d-box.com](http://www.d-box.com)) that supplement visual scenes. Large tactile transducers (such as Butt-kickers, [www.thebuttkicker.com](http://www.thebuttkicker.com)) that shake the entire seat using the sound stream are also common with gaming and music content. Custom editors (such as D-Box Motion Code Editor) and software plugins overlay visual and audio content with haptics, and allow designers to generate, tune and save frame-by-frame haptics in an allocated track.

In contrast to displacing the entire body, multichannel haptic devices create percepts of dynamic and localized haptic sensations on the user’s skin [126] and in mid-air [275]. Similar devices have been developed for online social interactions using custom multi-actuator displays [145, 199, 266]. All of these technologies require extensive programming experience, knowledge of hardware and background

in haptic sciences to generate expressive and meaningful haptic content. Without guiding principles or haptic libraries, content generation schemes are complex, device-specific, and time consuming.

Another class of haptic technology renders high-resolution spatio-temporal patterns on the skin using a sparse array of VT actuators. These technologies use parametric models of sensory illusions in touch, such as phantom tactile sensations [4], and create illusory vibrations in between two or more VT actuators. This idea has been used to create a perceived motion flow between two vibrators mounted on the ends of a handheld device [242] and to create across-the-body and out-of-the-body illusions on a mobile device using up to four actuators [158]. The Tactile Brush algorithm [125] combined phantom tactile sensations and apparent tactile motion to render high-resolution and moving haptic patterns on the back using a coarse grid of VT actuators, but paths must be pre-determined (Figure 4.2a). Other spatio-temporal VT illusions such as the “cutaneous rabbit” [261] and Tau and Kappa effects [108] can be also used with VT arrays.

### 4.3.2 Haptic Authoring Tools


As long as designers have considered haptic effects for entertainment media, they have needed compositional tools [102]. Requirements drawn from previous work on how to prototype, sketch, or control haptic phenomena using non-programming methods are summarized in Table 4.1.

The Hapticon editor [76], Haptic Icon Prototyper [257], posVibEditor [219], and Immersion’s Haptic Studio ([www.immersion.com](http://www.immersion.com)) use graphical representations to edit either waveforms or profiles of dynamic parameters (such as frequency or torque) over time. Another approach is predefining a library of haptic patterns to augment media content. Immersion Corporation’s Touch Effects Studio lets users enhance a video from a library of tactile icons supplied on a mobile platform. Vivitouch Studio [258] allows for haptic prototyping of different effects alongside video (screen captures from video games) and audio. These tools focus on low-level control of device features rather than a semantic space, and control devices with either a spatial or temporal component, but not both simultaneously.

Several tools have allowed users to author haptic content using accessible touch-

LR	Description
LR1	<b>Real-Time Playback</b> [186, 228] Rapid prototyping is essential for working with VT sensations, especially in absence of objective metrics. Feeling a sensation at design time allows iteration to converge faster to better results. However, <i>too</i> real-time can cause split attention.
LR2	<b>Load, save, manipulate</b> [132, 211, 228] A persistent object model is essential for sensation editing over longer projects and sharing with other designers or across devices. Well-defined actions upon a data structure also facilitates features like <i>undo</i> that support experimentation.
LR3	<b>Library of effects</b> [76, 113, 199, 257, 258] A library of saved sensations is an important feature used in previous haptic authoring tools, providing inspiration and preventing designers from re-inventing the wheel.
LR4	<b>Device configuration</b> [145, 155, 156, 199] Because of the many types of haptic devices, a general tool must be able to understand different devices. Lightweight configuration files are common in the literature, allowing users to select specific hardware, specify location and type of actuators, and choose a rendering algorithm.
LR5	<b>Multiple channels &amp; combination of effects</b> [76, 199, 219, 257, 258] Being able to display multiple effects simultaneously, or combine effects via superposition or concatenation, is essential for expanding the design space. This is typically represented in a timeline, which represents the temporal behaviour of any objects.
LR6	<b>Visual/direct control metaphor</b> [55, 145, 199] Most previous tools consider each actuator separately. When thinking semantically about a spatial system, a direct view of the device and actuator layout is critical for direct manipulation.
LR7	<b>Audio/visual context</b> [145, 186, 258] Haptic perception depends greatly on additional senses [108]. By providing audio and visual feedback, these effects can be mitigated and the designer can experience haptic sensations in context.
LR8	<b>User Feedback</b> [228, 258] Receiving feedback from users, either by demonstration or A/B testing, is extremely valuable.

**Table 4.1:** Literature Requirements (LRs) for a tactile animation authoring.

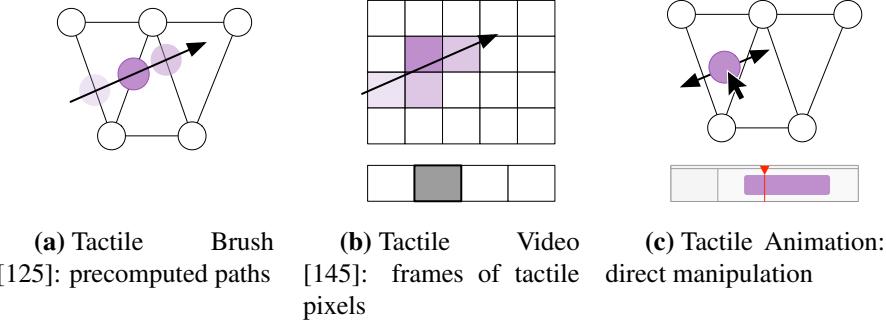

**Figure 4.2:** Comparison between related systems.

screen interactions. A demonstration-based editor [117] allowed control of frequency and intensity by moving graphical objects on a screen. mHIVE [228] controls frequency, intensity, waveform and envelope of two factors with touchscreen gestures. Both systems were shown to be intuitive and easy to use for exploration or communication, but faltered when refining more elaborate sensations. Commercially, Apple’s vibration editor (since iOS 5, 2011) allows users to create personalized vibratory patterns by touching the screen, but only produces binary on/off timing information.

Other aids to creating haptic phenomena include haptic sketching [186] for hands-on exploration of haptic ideas in early design, and end-user customization of tactile sensations [239]. Both emphasize exploration and broad manipulation rather than finely controlled end results. HAMLAT [71] supports authoring of force feedback in static 3D scenes. Lee and colleagues [155] used a musical metaphor for vibrotactile authoring. Schneider et al. introduced “FeelCraft” for end user customization of a library of *feel effects* [225].

Kim and colleagues offered combined spatial and temporal control using a tactile video metaphor for dense, regular arrays of tactile pixels (“taxels”), including a feature of sketching a path on video frames [145] (Figure 4.2b). While a promising approach, this tool relies on editing of discrete actuators and frames, with its sketching feature used for input, not as a manipulation method. As well, it does not generalize to sparse or irregular displays, and was not evaluated with designers. We suggest that an animation metaphor could provide an easier interaction model,

facilitating key creative activities such as rapid exploration and iteration, especially through a continuous timeline (Figure 4.2c). The control of multi-actuator outputs has also been explored by TactiPED [199] and Cuartielles' proposed editor [55]. However, these approaches still require the separate control of different actuators, rather than a single perceived sensation produced by the multi-actuator device.

## 4.4 Tactile Animation Authoring Tool


Our objective is to provide media designers with a familiar and efficient framework for creating dynamic haptic content. Mango's design is based on two sets of requirements: Literature ("LRs", Table 4.1), from prior research on haptic authoring tools, and Industry ("IRs") from interviews with five industry experts in haptic media creation and animation, which confirm and expand upon design decisions for other VT tools.

### 4.4.1 Gathering Design Requirements

We interviewed two industry experts with haptics experience from a media company (E1-2). E1 uses Max/MSP, OpenFrameworks, Processing, and Visual Studio to create haptic media. E2 is a professional media designer and an expert user of Pro Tools (an industry standard for authoring sound media). Together, E1 and E2 previously undertook a six-month training that included generation of dynamic haptic experiences on seats and supporting platforms using audio and video tools. Our interviews included meetings, recordings, and sketches of their experience during training.

In addition, we conducted contextual interviews of three industry animators (A1-3) interacting with non-tactile animation tools using a think-aloud protocol. A1 and A3 used Adobe After Effects, while A2 used Maya. A1 and A2 were tasked with creating an animation of two balls moving; A3 created an animation based on a sound file. These interviews yielded rich detail that we compiled into categories, then compared with our LRs (Table 4.1). LRs 2-7 also emerged independently from this stage. We extend the LRs with additional expert-drawn **industry requirements (IRs)**:

*IR1 - Animation window allows users to draw tactile animation objects, control*

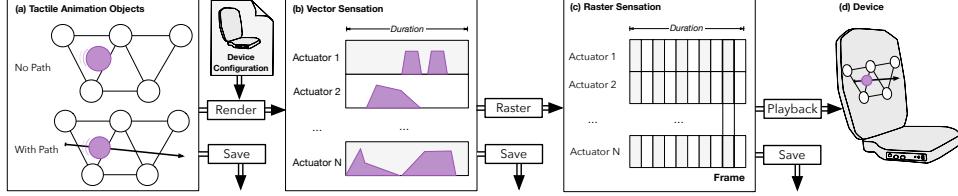

**Figure 4.3:** Tactile animation rendering pipeline. Users can: (a) create tactile animation objects; (b) render objects to actuator parameter profiles (such as amplitude) with our rendering algorithm; (c) rasterize vector sensations into frames; (d) play the sensation on the device.

them in space, and define their motion paths. The window is overlaid with location and type of haptic actuators, providing visual feedback (LR8).

*IR2 - Timeline* is a time track for a tactile animation object. During playback, the animation is played on IR1 showing the movement of the animation relative to the tactile object. Object behaviours are linked to time track to visualize temporal variations. Time tracks are editable by inserting key frames.

*IR3 - Object tools* extend LR2, supporting direct manipulation operations on tactile objects such as “new”, “scale”, “translate”, analogous to object creation and manipulation in After Effects and Maya.

*IR4 - Path tools* define motion paths of tactile objects (straight lines, curves, input-device traces), and store them in a path library (LR3).

*IR5 - Haptic rendering schemes* compute output waveforms for each actuator channel, animated visually in the animation window. Users select the scheme from a list for connected hardware, defined in a hardware configuration file (LR4).

*IR6 - Global parameter tools* allow the user to control the overall feel of the tactile animation object. Analogous to filters and effects applied on the object, this includes parameter setting for frequency, intensity and modulation.

We developed a tool design from these two sets of requirements. Our Mango prototype uses Python 2.7 and Tkinter for the rendering pipeline (Figure 4.3) and UI (Figure 4.4), which communicates with haptic devices via USB.

#### 4.4.2 Framework for Tactile Animation

In this section, we present an animation metaphor that allows users to generate tactile content in the same way as they would create visual animations and play them real-time on a VT array. Figure 4.3 shows the workflow of this authoring mechanism. Designers create tactile animations on a typical animation tool as shown in Figure 4.3a. The animation object is placed in space, and the designer adjusts its size on the visual outline of the VT array. The designer then adds movements and special effects to the object using Mango’s toolset, and plays it to observe its frame-by-frame sequence.

Mango’s rendering engine translates visual animations to tactile animations on the VT array. Knowing the location of vibrating points on the sparse array of VT actuators, the rendering engine resolves the animated sequence into individual actuators using the phenomena of phantom tactile sensations [4, 125]. The phantom sensation is a sensory illusion elicited by stimulating two or more vibratory elements on the skin. Instead of feeling the individual vibration points, the user feels a single sensation in between, whose perceived intensity is defined by the weighted sum of the intensities of the vibrating elements. Therefore, in each frame, the animated tactile object is resolved into intensity of actuators on the VT array (Figure 4.3b). The rendering engine then calculates raw waveforms for each VT channel (Figure 4.3c) that can either be sent to the VT device to play the animated sequence or exported as a multichannel datafile for later use. Previous work has interpolated between only two actuators [158, 242]; however, a more generalized 3-actuator interpolation algorithm allows for arbitrary real-time manipulation of the tactile animation object on grid displays.

To accommodate the animation framework, we define three **datatype models**, for use in the current implementation and future expansion of the Mango tool: *Tactile animation objects*, high-level hardware-independent data types for tactile animation; *vector formats*, high-level hardware-specific control common in previous work; and *raster formats*, low-level hardware-specific formats for rendering and playback.


**Tactile animation objects** are high-level specifications of virtual sensations moving on a 2D VT array (Figure 4.3a). High-level parameters, such as location,

size, and other semantic qualities, can either be constant or variable. Each tactile object has a start time and a duration. Object type is also defined for tactile animations that sets pre-defined parameters and features to animated objects. For example, a moving virtual point can have a position, size, and frequency parameter, while a “rain” effect can have a position and more semantic parameters like raindrop frequency or size.

Tactile animation objects are device-independent. Mango uses a device configuration file (LR4) and the rendering engine to create animated VT patterns on hardware. Animation objects can be combined in novel ways, organized in groups, or generate other tactile animations like a particle generator as in a graphical animation tool, and can have paths that constrain motion to a pre-determined trajectory. We prototyped an early version of the tactile animation object in Mango; however, the data type is extensible.

**Vector formats** are similar to those in previous work (e.g., [76]). Instead of object-based definitions, as in tactile animation objects, parameters are defined for individual actuation. (Figure 4.3b). Parameters include duration, amplitude envelopes (e.g., fade-ins and fade-outs), frequency, and start times. Being device-specific, vector formats offer finer sensation control than tactile animation objects (analogous to pixel-level editing of sprites). However, creating a single percept from independent controls can be challenging. This data type is useful when rendering methods for the hardware are not defined or the user wants to control specific actuator sequence to animate tactile content, such as using the Tactile Brush [125].

**Raster format**, analogous to a raster-graphics image or WAV file, is suitable for playback operations or exporting it to a device specific format (Figure 4.3c). A raster format contains a matrix of actuator intensities; each row defines intensities of an actuator and columns containing the intensities at each time instance. Each format also contains a timestamp row defined by the rendering engine’s framerate. The playback system parses the raster data, finds the current column, and pushes these actuator settings to the device. This data type is also used for real-time feedback during authoring.

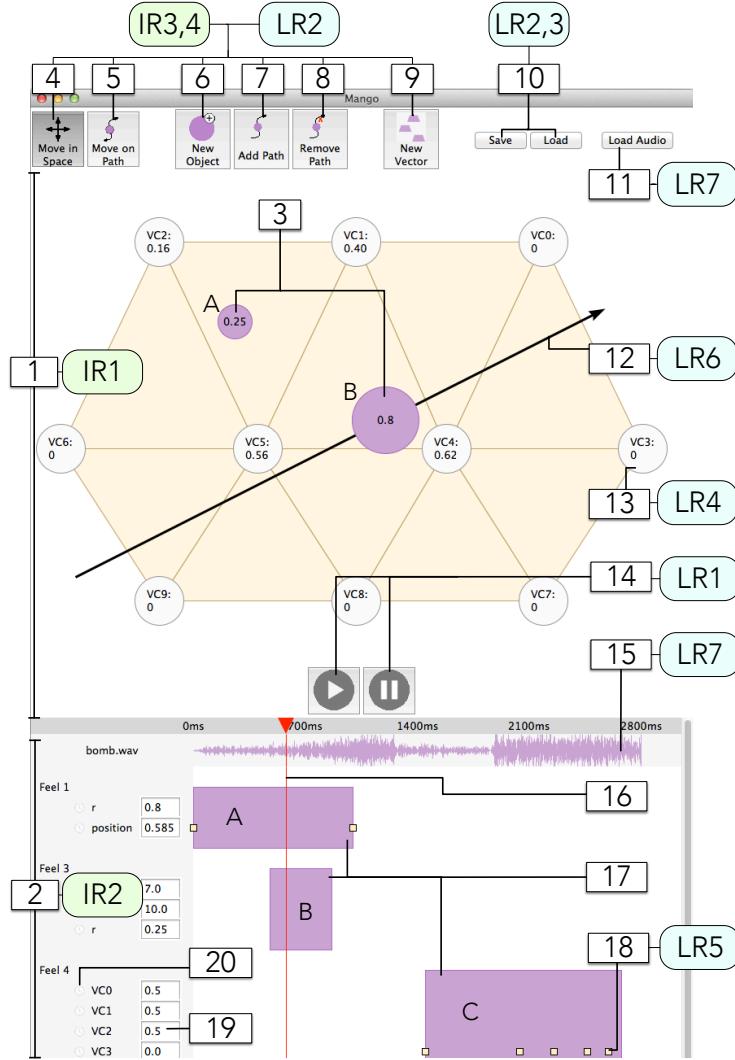

**Figure 4.4:** Mango graphical user interface. Key components are labeled and linked to corresponding design requirements.

#### 4.4.3 Authoring Interface

The authoring interface allows designers to efficiently create moving tactile content in a familiar environment. Here we describe user interactions, most of which are through the animation window (1) and timeline (2) (Figure 4.4).

*Animation Window:* A user creates a tactile animation object (3) with a “new

object” button (6), then manipulates it in the animation window (1). The window is overlaid with a faint trace of the VT hardware (13) for context. Here, we used an array of 10 VT actuators (Figure 4.6).

*Object Paths:* The animation object (3A) has (x, y) parameters describing position, an “r” (radius) parameter, corresponding to the VT output voltage from 0 (minimum) to 1 (maximum). An optional path can be added to an object (7), or removed (8), along which the motion of the object (3B) is constrained (12). The path-object (3B) is manipulated in two ways: moving on path (5), which moves the object from the beginning (position=0) to the end of the path (position=1), or moving in space (4), which moves the object and the path together on the animation window (1). The current Mango implementation only supports straight-line paths, however their use can be extended in a later version. Also note that curves can be accomplished through keyframed (x, y) positions.

*Timeline:* Each animation object (3) is represented in the timeline (2) as a track (17). The red scrubhead (16) (shown as a triangle and line) shows and manipulates the current time. Animation objects can be moved in time by clicking and dragging, and resized to change duration. Individual parameters can be set on the left, by typing values into text fields (19), allowing precision. The entire animation can be played and paused using buttons (14) or the spacebar.

*Keyframes:* Parameters can be toggled as “keyframeable” with a small clock button (20). When the value is changed, a keyframe (18) is automatically created at the current time. Intermediate values are linearly interpolated.

*Vector Sensations:* A new vector can be created by selecting an object (3) then clicking on a button (9). These sensations control each actuator directly through the parameter values, controlling that actuator’s voltage from 0 to 1 (same as the “r” parameter). The corresponding actuator is highlighted in the animation window (1) when the text field (19) or track (17C) is selected. Each track is also keyframeable.

*Save and Load:* Animations can be saved and loaded (10) to/from JSON files. An audio track can be loaded (11) to the timeline (15). This allows the user to design a VT experience for sound files (LR7). Video overlay is left for future work.

*Hardware Configuration File:* A hardware-specific structure is defined and stored in a JSON configuration file (LR4). The file contains: (a) physical width and height of the grid, (b) a dictionary of actuator types (e.g., voice coils or rum-


ble motors), each with a list of control parameters (e.g., frequency, intensity) and allowable values; (c) location and type of each actuator; (d) supported communication protocols and rendering methods; (e) brand information (e.g., USB vendor id and product id) for device recognition; and (f) default settings. Physical dimensions are defined in SI units, e.g., meters, Hz.

*Playback:* Once the animation of the object is defined, the user can play and stop the animation. During playback, the animation runs in (1) and the corresponding parameters vary in (2). Simultaneously, VT stimulations are activated on the hardware for user feedback. Multiple animation objects and vector sensations can exist simultaneously. Actuators output the sum of all the values generated by objects (described later in the Rendering Algorithm section) and vector sensations.

## 4.5 Rendering Algorithm

Mango’s rendering algorithm defines how high-resolution haptic feedback is translated to sparse grids of VT actuators. The rendering algorithm translates animations created in the animation window to animated VT patterns on the hardware. Figure 4.3 shows the rendering pipeline that converts animation objects to a raster format, which outputs to the hardware.

The rendering algorithm is derived from psychophysical understanding of VT illusions on the skin and creates percepts of virtual actuators and their motion in between a set of real actuators. The precise perceptual model depends on several factors, such as type of VT actuators (DC vs. voice coil motors), stimulation site (forearm vs. back) and the spacing of actuators in the array (e.g., [125]). To allow for custom framerates and real-time feedback, we generalize from the 1D case (in between two VT actuator along a line) to the 2D case (in between three or more actuators, previously accomplished with non-VT sensations [263]). Thorough investigation of the psychophysical model is beyond our present scope, however, we empirically determine the most effective model among those documented in the literature for the 1D case with a pairwise comparison.

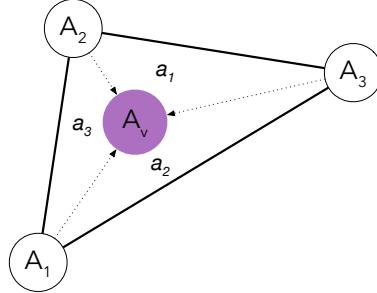

(a) Barycentric coordinates

$$\text{Linear} \quad A_i = a_i \times A_v$$

$$\text{Log} \quad A_i = \frac{\log a_i + 1}{\log A_{max} + 1} A_v$$

$$\text{Power} \quad A_i = \sqrt{a_i} \times A_v$$

(b) Candidate interpolation methods

**Figure 4.5:** Interpolation models to determine physical actuator output ( $A_{1-3}$ ) from virtual actuator intensity ( $A_v$ ) and barycentric coordinates ( $a_{1-3}$ ).

#### 4.5.1 Perceptual Selection of Interpolation Models

The rendering algorithm translates virtual percepts to a physical actuator grid. We first construct a Delaunay triangulation for all actuators to automatically define a mesh on the hardware grid. At each instant of rendering, we use barycentric coordinates of the virtual animation objects relative to a triangle defined by three real actuators (Figure 4.5a). Barycentric coordinates are scaled by an interpolation method to determine real actuator intensity.

We propose three interpolation models for Mango, derived from prior psychophysical understanding of phantom VT sensations: (i) *linear*, (ii) *logarithmic* (“*log*”), and (iii) *Pacinian power* (“*power*”) (Figure 4.5b).

In the linear interpolation model, barycentric coordinates are linearly related to actuation amplitude. In the log model, these coordinates are scaled logarithmically, as perceived intensity is related to physical vibration amplitude [270]. In the power model, coordinates are coupled to the power (square of the amplitude) of vibrating stimulations [270]. Linear and log interpolation models have been used in the past to express either location or intensity respectively (but not both) of virtual sensations between two vibrators [4, 242]. A Pacinian power model was used in [125] to account for both location and intensity of virtual sensation between two vibrators.



(a) Rendering study interface

(b) Output device with highlighted actuators

**Figure 4.6:** Rendering study setup and user interface.

#### 4.5.2 Pairwise Comparison Study

To determine the preferred model for this VT hardware in Mango’s rendering pipeline, and to identify relevant factors (e.g., frequency, amplitude), we performed a pairwise comparison of our three candidate interpolation models.

#### Participants and Apparatus

Eighteen volunteers took part (6 female, between age 20-35). The VT hardware consisted of 10 high-quality VT actuators (C2 tactors, Engineering Acoustics, Inc., USA) arranged in a 3-4-3 layout and mounted on the back of a chair in a pad 21 cm high, 29 cm wide, and 2 cm thick; actuators form equilateral triangles with edges of 6.35 cm (Figure 4.6b). The rendering engine updates at 100 Hz. Through piloting, we determined that the device’s on-screen visual outline should mirror the sensations rendered on the physical device. That is, if participants see an animation object on the right side of the screen, they prefer to feel it on the right side of the back. Figure 4.6a shows the experiment interface, in which an arrow represents the sensation direction.

## Methods

We conducted A/B paired comparison tests (two-alternative, forced-choice) to determine the preferred model out of the three candidates. In each trial, participants were presented with two stimuli at a 400 ms interval. Each stimulus is a “straight-line” VT stimulation on the back using one model. Participants were asked to select the stimuli that *best represented straight-line motion* in a variety of directions.

Two durations (500 and 1500 ms), eight cardinal directions, and A/B order were crossed with each model pair, and presented in a random order. For each trial, frequency was randomly selected from 80, 160, 240, and 300 Hz, and intensity from between 10 and 20 dB above detection threshold. Each participant performed 96 trials over  $\sim 15$  min (1728 total).

## Results

Each algorithm pair’s data was fit to a logistic regression model with participant, frequency, intensity, direction, and duration as factors; direction was grouped into horizontal, vertical, and diagonal. We performed stepwise regression (backwards elimination with  $\alpha = 0.05$  and a  $\chi^2$  test for removing each factor) to iteratively eliminate factors that were not statistically significant.

*Logarithmic vs. Linear.* Regression eliminated duration, frequency, intensity, and direction ( $p > 0.1$ ). The resulting model has Nagelkerke  $R^2 = 0.135$ . Using Bonferroni correction for multiple comparisons, 95% confidence intervals for each participant were computed. 11 participants were more likely to prefer Log over Linear ( $p < 0.05$ ) models; none were likely to prefer the Linear model.

*Logarithmic vs. Pacinian power.* All 5 factors were eliminated ( $p > 0.1$ ). The overall 95% confidence interval of participants selecting Log over Power was 37.06% to 87.40%, overlapping 50%. We therefore detected no significant difference of preference between Log and Power models.

*Pacinian Power vs. Linear.* We eliminated intensity, direction and duration ( $p > 0.1$ ), with the fitted model’s Nagelkerke  $R^2 = 0.0970$ . The confidence interval for each participant-frequency combination, via Bonferroni corrections, yielded 22 / 72 participant-frequency combinations selecting Power model over Linear model more than 50% of the time. No one chose the Linear model more than 50% of the

time.

**Conclusion:** Logarithmic interpolation outperformed linear and was equivalent to Pacinian power model. We proceeded with the logarithmic model for Mango’s implementation, as the power model did not outperform either of the others.

## 4.6 Design Evaluation


To evaluate Mango’s animation metaphor and expressive capability, we asked media professionals to create a variety of designs. Qualitative evaluation was chosen for rich, focused, early feedback of the animation metaphor and lessons for iteration. A quantitative comparison between tool perspectives is left until more refined tools are developed. We wanted to establish whether this is an effective approach before studying the most effective approach.

Six participants (P1-6, 3 females) were introduced to Mango driving the VT hardware described previously. P1 had experience with haptics but not animation beyond video editing; P2-5 had animation experience but little or no experience with haptics; P6 had no experience with haptics or animation, but was familiar with media tools like Adobe Photoshop. P5 was also involved with the requirement gathering interviews presented earlier. Each entire session took 40 to 60 minutes.

Each participant was introduced to Mango with a training task: designing an alerting sensation using either animation objects or vector sensations (order counterbalanced). Then, each participant was given three design tasks. 1) Primarily *temporal*: create a heartbeat sensation. 2) Primarily *spatial*: tell a driver to turn left. 3) *Context-based*: create a tactile animation to match a sound file. A 3-second sound effect of a bomb falling (with a whistle descending in pitch) then exploding with a boom was chosen, i.e., complex with two semantic components. The wide array of resulting designs can be found in the accompanying video. Mean non-training task time was 5:59 (med 5:38, sd 2:46, range 1:41-13:48).

After each task, participants rated confidence in their design from 1 (Not confident) to 5 (Very confident), primarily to stimulate discussion. All designs were rated 3 or higher; P6 wrote “6” for his sound-based design. The animation object training task was always rated the same or higher than the corresponding vector

training task. While suggestive, these ratings were self-reported and from a small sample. We thus did not conduct statistical analysis.

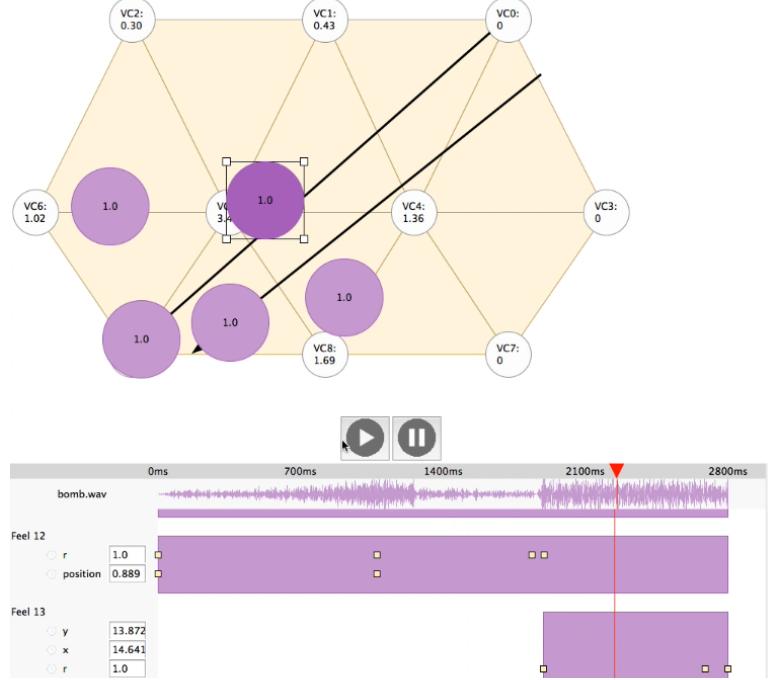

**Figure 4.7:** Example of P2’s animation for matching a sound. See the accompanying video for all participant animations.

A semi-structured interview followed the design tasks. Participants were asked to compare animation objects with vector sensations, and to walk through the interface to elicit feedback. Interviews were conducted and analyzed by a researcher with training and experience in qualitative research, and followed established methodologies: methods of grounded theory [49] informed by phenomenological protocols [187]. Analysis resulted in four themes.

### Theme 1: Animation Metaphor

Participants found the tool easy to use. All six participants were able to accomplish all five tasks (object alert, vector alert, heartbeat, turn left, sound). Participants described the interface as intuitive (P1-5), agreeing that it was an animation tool:

*“It’s up to the standards of other animation tools” (P1), “This is totally animation” (P2), “It felt very much like an animation tool” (P4), “I’m not an expert when it comes to haptics, but this software seems almost as if it can change the game of designing haptic vibrations” (P5).* Negative feedback focused on polish and feature completeness: *“gotta spline [the keyframe interpolation]” (P2), “a couple quirks but there was nothing difficult to overcome” (P4), “being able to design your own curve [path] would be really nice” (P5).*

### **Theme 2: Tactile Animation Object vs. Vector Sensations**

Participants relied more on animation objects than vector sensations, which were only used twice: P4’s heartbeat task and P5’s sound task (combined with an animation object). P1 switched from vectors to animation objects early in her heartbeat task; no other participants used vector sensations.

Animation objects were described as easier to use and more intuitive, especially to represent location or for non-animators. *“After using the new object I’d probably never use new vector again” (P2), “easier to find the location of the heart” (P1), “if I weren’t an animator I think I would only use [animation objects]” (P4).* Vectors were preferred for more fine-tuned control when motion didn’t matter as much, often using many keyframes. *“You can control multiple [actuators] at the same time, so you don’t have to create new objects and then put them everywhere on the screen” (P1), “[Animation objects] can be more comfortable to use when one doesn’t work with keyframes” (P3), “If you want precise control over [actuators], then vector is the way to go” (P4).*

### **Theme 3: Designing-in-action with direct manipulation**

Participants used direct manipulation to feel their designs in real time, dragging animation objects and scrubbing through the timeline: *“I would make the [animation] object and just play around with it before creating the animation, as a way to pre-visualize what I was going to do” (P5), “I kind of play around with it, and randomly come up with the ideas” (P6).* P2 even noted that YouTube did not have real-time video scrubbing feedback like Mango’s: *“I wish I could scrub back and forth [with YouTube]” (P2).* However, continual vibrations were annoying,

and participants requested a “mute” feature: “*It would be nice if...it doesn’t go off constantly.*” (P3).

More generally, participants used feedback from their experience or external examples. P1 stopped to think about her own heartbeat, P2 used a YouTube video of a heartbeat as a reference, and P3 based her alert on her phone: “*It’s typical to have two beeps for mobile phones*” (P3). Correspondingly, participants were excited when prompted by an audio sensation: “*I was really happy with the bomb one, because I could really hear it and imagine me watching a TV and then feel it at the same time*” (P1), “*The sound part was good, that would be a fun thing to design for*” (P4).

#### **Theme 4: Replication through Copy and Paste**


Replication in both space and time was common while using Mango. Many designs had symmetrical paths to reinforce sensations (Figure 4.7). All but P4 requested copy / paste as a feature. “*I could just copy/paste the exact same thing on the left side and then move it to the right side*” (P1), “*I have the timing the way I like it, ideally it’d be cool if I was able to copy and paste these, so it would be able to repeat*” (P5).

## **4.7 Discussion**

Here we interpret our design evaluation, explore animation with other devices, and describe applications and limitations.

### **4.7.1 Design Evaluation Summary**

From our design evaluation, we conclude that tactile animation is a promising approach for controlling tactile grids. Direct, continuous manipulation of tactile animation objects supported embodied design and exploration by animators, who rapidly iterated on designs to try new ideas. Mango facilitated the design of a wide variety of animations (see accompanying video) and received positive responses. We also found recommendations for our next iteration: more animation features, video as well as audio context, and muting.

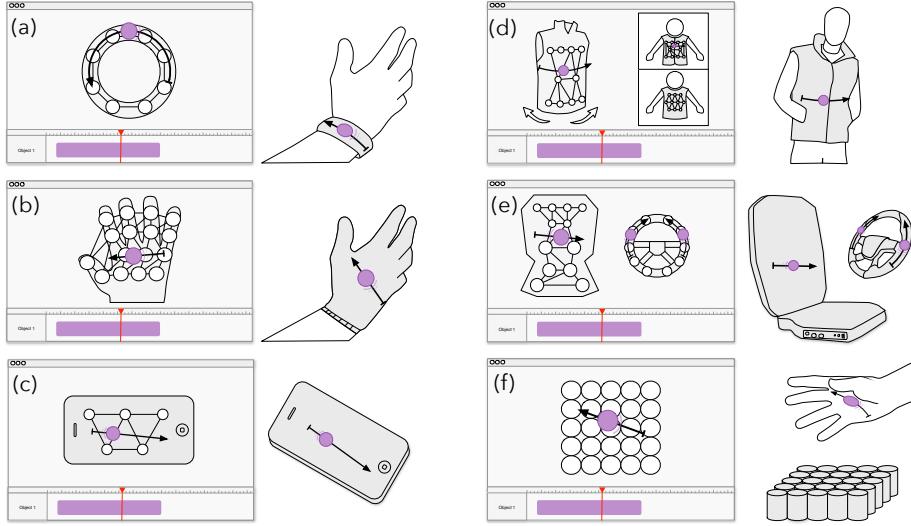

**Figure 4.8:** Tactile animation could define motion with (a) 1D actuator arrays, (b) dense and sparse VT grids, (c) handhelds, (d) 3D surfaces, (e) multi-device contexts, and (f) non-VT devices like mid-air ultrasound.

#### 4.7.2 Possible Extension to Other Device Classes

The animation metaphor is not limited to a back-based pads. Part of the advantage of an abstracted animation object is that, as long as a suitable rendering algorithm can be developed, the metaphor can apply to other devices. In this section, we illustrate possibilities that we plan to explore in future work.

*1D VT Arrays (Figure 4.8a):* 1D VT arrays are common in arm sleeves, wrist bands, belts, and similar wearables. These devices provide sensations along the path of the array. By constraining objects to a linear or circular path, barycentric coordinates collapse into 1D interpolation.

*Dense and Sparse VT Grids (Figure 4.8b):* 2D VT grids are also common, used in chairs, gloves, and the backs of vests. While we evaluated Mango with a sparse back-mounted array, tactile animation naturally supports denser arrays, either with our rendering algorithm or by using a nearest-neighbour technique to activate a single actuator.

*Handhelds (Figure 4.8c):* Actuators embedded in handheld objects, such as mobile devices, game controllers, or steering wheels, shake objects instead of di-

rectly stimulating the skin. Animators might be able to define source locations for vibrations using handheld-based rendering algorithms (e.g., [242]).

*3D Surfaces (Figure 4.8d):* Mango currently only supports a 2D location for its animation objects. However, tactile animation can be extended to support surfaces of 3D surfaces, such as vests or jackets that wrap around the user’s body. More work will need to be done to perfect this interaction style, possibly using multiple views or a rotatable 3D model with animation objects constrained to the surface.

*Multi-device contexts (Figure 4.8e):* Mango’s rendering algorithm already supports connections to multiple devices simultaneously. The editing interface could combine layouts for different devices, enabling animators to animate the entire user experience (such as a car’s seat and steering wheel).

*Non-vibrotactile devices (Figure 4.8f):* While our rendering algorithm is particular to VT arrays, a tactile animation object can represent manipulable percepts with other actuation technologies. Ultrasound-based mid-air displays generate a sensation as a focal point with a position and size [275]; this sensation could be manipulated through a tool like Mango. Similarly, passive force-feedback sensations (e.g., Hapseat [59]) or height displays (a grid of pins) could be supported.

### 4.7.3 Interactive Applications

While our goal was to enable animators to create rich content, the tactile animation object can be linked to alternative input sources for other interactive experiences.

*User gestures.* User gestures and motion can be tracked and mapped to animation objects directly rendered on the haptic hardware. For example, a user creates patterns on a touch sensitive tablet that maps touch locations to a grid. Users could play games or create personalized haptic messages on the back of a vest. Similarly, a dancer’s movements could be tracked through accelerometers, drawing animated haptic content on the body of her audience through actuated theater seats during a live performance.

*Camera feed extraction.* Motion from video feeds can be automatically extracted with computer vision and rendered on grid displays [144], providing dynamic patterns associated with actions during sports, movies, and games. Similarly, animation parameters could be extracted and mapped to positions on a VT

grid, creating haptic feedback for non-haptic media.

*Data streams.* One main application of haptic grid displays is to provide users directional, assistive, and navigational cues during driving cars, walking down the street, or with over-saturated sensory tasks. Users could associate digital data streams, such as GPS input, to predefined set of directional patterns on the back or palm of the hand.

#### 4.7.4 Limitations

While the tactile animation metaphor seems promising and may apply to many contexts, it is limited by the requirement of a suitable rendering algorithm for target hardware. We have not yet explored other form factors, such as handhelds, multi-device scenarios, or non-vibrotactile sensations. Although we perceptually optimized our algorithm, we did not conduct a full psychophysical investigation. Further work needs to be done to identify the limits, thresholds, and peculiarities of this rendering technique. Examples include: curved trajectories of animation objects (although participants' use of curved motion was encouraging, e.g., P5's turn left sensation), spatial frequency control (how to superpose animation objects of differing frequencies), non-triangular meshes (e.g., quadrilateral interpolation or kernel methods), and mixed actuator types (such as a chair with both voice coil and rumble motors, Figure 4.8e).

### 4.8 Conclusion

This paper introduces the *tactile animation object*, a new abstraction for creating rich and expressive haptic media on grid displays. This animation metaphor allows designers and media artists to directly manipulate phantom vibrotactile sensations continuously in both space and time. Our rendering pipeline, which uses a perceptually-guided phantom sensation algorithm, enables critical real-time feedback for designing. We incorporated these ideas into a prototype, Mango, with a design grounded in animator requirements and haptic design guidelines. Professional animators used our tool to create a variety of designs, giving positive feedback and excitement for future versions. This approach has the potential to accommodate a large variety of haptic hardware, ranging from a single shaking


element mounted on the seat to an array of actuators stimulating multiple points on the skin, and can export content into formats applicable in the production pipeline. Tactile animation empowers animators with a new set of artistic tools for rich, multimodal feedback.

## **4.9 Acknowledgments**

We thank our reviewers and participants for their valuable feedback. This work was supported by Disney Research, with additional support provided by NSERC.

# Chapter 5

## Browse: Macaron

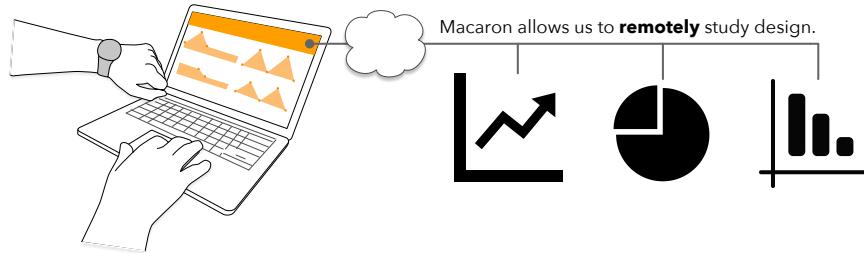

**Figure 5.1:** Concept sketch for a Macaron, an online, open-source VT editor features incorporable examples and remote analytics.

**Preface** – In our third vibrotactile design tool, Macaron<sup>1</sup>, we explored the design activity of *browsing* external examples. Because we explored HaXD tool implementation in-depth in Chapter 4, we knew how to build Macaron; we thus focused on studying the design process. We specifically investigated how different ways of viewing or reproducing elements of a vibrotactile icon affect design. We based this task on the effective sound-based task in Chapter 4: here, participants designed haptic tracks for visual animations. To complement our previous studies, participants were generally naïve to haptics and media design. We used phenomenology and grounded theory methods augmented by logged user actions and visualized

---

<sup>1</sup>Schneider and MacLean. (2016) *Studying Design Process and Example Use with Macaron, a Web-based Vibrotactile Effect Editor*. HAPTICS '16.

timelines to look at our participants’ design process: we directly observed the different stages of design, including *browsing*, *sketching*, and iterative *refinement*.

## 5.1 Overview


Examples are a critical part of any design process, but supporting their use for a haptic medium is nontrivial. Current libraries for vibrotactile (VT) effects provide neither insight into examples’ construction nor capability for deconstruction and re-composition. To investigate the special requirements of example use for VT design, we studied designers as they used a web-based effect editor, *Macaron*, which we created as both an evaluation platform and a practical tool. We qualitatively characterized participants’ design processes and observed two basic example uses: as a starting point or template for a design task, and as a learning method. We discuss how features supporting internal visibility and composition influenced these example uses, and articulate several implications for VT editing tools and libraries of VT examples. We conclude with future work, including plans to deploy Macaron online to examine examples and other aspects of VT design *in situ*.

## 5.2 Introduction

Creativity often sparks when an inventor, examining existing ideas, sees a way to combine them with a novel twist [271]. An environment rich with *examples* is fuel for this fire. In industrial and graphic design [30, 113] their use improves process and final results [67, 154].

Several effect libraries are available to designers of vibrotactile (VT) sensations, e.g., for accessible wayfinding [287] or media experiences [56, 123, 128, 225]. But despite the need for effect customizability [239], VT library elements are generally opaque in construction and immutable. Recent advances include limited parameter adjustability [128, 225] and faceted library search and browsing [240]. Despite this, designers still must either choose a pre-existing sensation or build from scratch: *elements cannot be sampled, recombined, built upon or adapted*. In contrast, web designers can access a page’s source; graphic and sound designers can sample and incorporate colours and sounds from other media.

Here, we *examine the potential role of examples* in VT design, to establish how

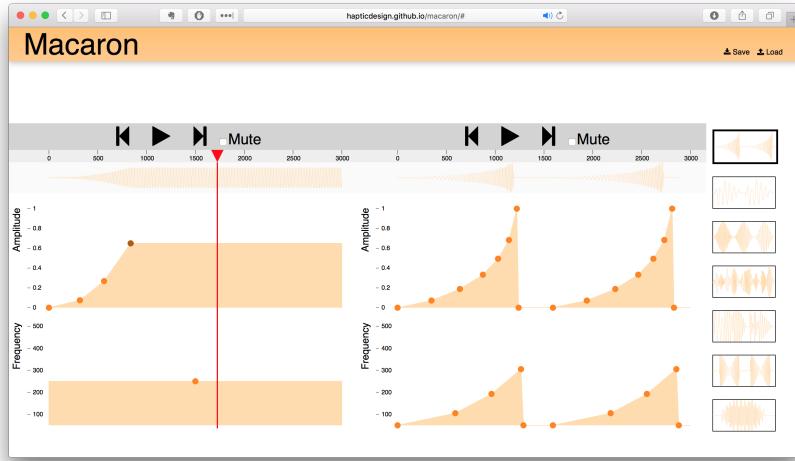

**Figure 5.2:** Macaron interface, “hi” version featuring both composability (copy and paste), and visibility of underlying parameters. The user edits her sensation on the left, while examples are selected and shown on the right. Macaron is publicly available at [hapticdesign.github.io/macaron/](https://hapticdesign.github.io/macaron/).

to best support their use. We designed a web-based editor and interactive *design gallery* [154, 174] (Figure 5.2) for VT sensations, then asked users to compare versions (Figure 5.3) that vary in example accessibility via *visibility* and *incorporability*, as they create VT effects for animations (Figure 5.4).

Analysis of user action logs provide an objective picture of the VT design process. To validate the deployment of this methodology at scale, we also interpret and validate logs with direct observation and interviews. Specifically, we:

- introduce *Macaron*, a web-based VT effect editor through which examples can be used directly in designs,
- find that *visible, incorporable examples make design easier* by providing a starting point for design and scaffolding to learn how to work with VT parameters,
- identify *implications for future tools and libraries*, and
- discuss the *opportunities afforded by a web-based editor* as a practical tool

and platform for studying other aspects of VT design at scale.

## 5.3 Related Work

### 5.3.1 Salient Factors in VT Effect Perception and Control

Vibrotactile effects (e.g. haptic icons [166]) are typically manipulated with low-level engineering of signal parameters, beginning with amplitude, frequency and waveform [20, 102, 166, 169]. Rhythm can support large, learnable icon sets [256, 264]; combining waveforms enhances roughness [101]. Time-varying amplitude adds musical expressivity, from tactile crescendos [25] to envelopes [228]. Multi-dimensional scaling can be used to identify and elaborate these parameters [77, 116, 166, 268].

Affect and metaphor are another way to structure and manipulate sensations at a level more cognitively relevant than engineering parameters. Perceived valence (pleasantness) and arousal can be influenced by frequency/amplitude combination [192, 285]. Metaphors [39, 191, 240] and use cases [39, 240] offer structure, memorability and design language. Spatial displays require additional controls for location and direction, whether body-scale [102, 125], mobile [242], or mid-air [192]. While many parameters are available for VT design, we chose the most established (time-varying frequency and amplitude) for Macaron’s initial implementation.

### 5.3.2 Past Approaches to VT Design

Past editors – e.g., the Hapticon Editor [76], Haptic Icon Prototyper [257], posVibEditor [219], Vivitouch Studio [258], and Haptic Studio ([www.immersion.com](http://www.immersion.com)) – are track-based, with graphical representations to edit either waveforms or profiles of dynamic parameters. Additional features (e.g., spatial control or mobile interfaces) are surveyed in [233].

A library of effects is critical for haptic design tools [233]. Most existing tools support feature saving/loading, and some have an internal component library [76, 257, 258]. However, previous implementations were primarily *compositional*, employing building blocks [77] rather than complete artifacts. Example use was not studied.

Large VT libraries contain complete artifacts, but impose a serious constraint on their use. In the Immersion Touch Effects Studio library, underlying structure and design parameters are hidden and cannot be incorporated into new designs. VibViz [240] features 120 VT examples with visualizations searchable by several taxonomies, but the selection model is all-or-nothing. FeelCraft [225] proposes a community-driven library of feel effects [128] for simple parametric customization and re-use. While end user customization-by-selection is important [239], experts need a more open, editable model, just as web designers rely on full access to source code with recent tools allowing search and easy incorporation [154].

### 5.3.3 Examples in Non-Haptic Design


Problem preparation – also known as the “problem setting” [235] or “analysis of problem” [271] step of design – involves immersion in the challenge and drawing inspiration from previous work. Both may come from the designer’s experience, *repertoire* [235] or exposure to a symbolic domain, e.g., mathematical theorems and notation [54].

To this end, external examples are critical in inspiring, guiding and informing design [30, 113]. Industrial designers collect objects and materials; web designers bookmark sites [113]. In graphics and web design, *design galleries* organize examples to be immediately at hand [154, 174]. Example-based tools often use sophisticated techniques to mix and match styles and content [150]: this requires immediate access to the examples’ underlying structure.

## 5.4 Apparatus Design

To investigate VT design in the context of examples, we required a platform that would expose users’ natural procedural tendencies. Our Macaron design gallery is simple, flexible, and extensible. In this work, we add multiple types of example access to polished implementations of familiar concepts: *tracks*, *envelopes*, and *keyframes* (Figures 5.2,5.3).

*Tracks* are the accepted language of temporal media editors (video, audio, and past haptic efforts [76, 219, 257]). We provide tracks for perceptually important “textural” parameters (amplitude and frequency); the user accesses periodic and

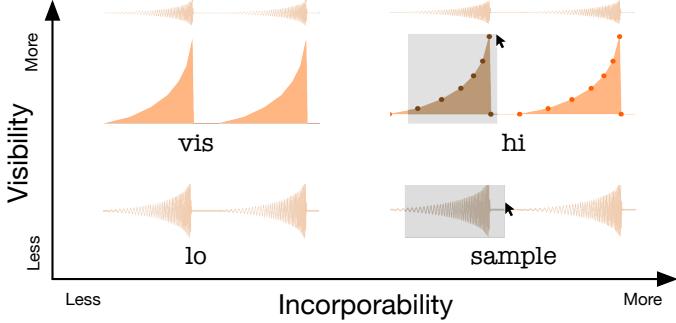

**Figure 5.3:** Design space for Macaron versions. `hi` and `sample` both allow for selection and copying of example keyframes. `vis` and `hi` both show the underlying profiles. `lo` represents the current status quo; only a waveform is shown.

time-variant aspects by manipulating their *envelopes* using *keyframes*, with linear interpolation in-between. Users double-click to create a new keyframe, click or drag a box to select, and change or delete a selection by dragging or with the keyboard. A waveform visualization reflects changes.

Macaron’s example access features are inspired by more recent graphics and web design galleries [154, 174, 213], which show examples side-by-side with the editor. Other implemented features, critical for polished creative control [233], include real-time playback, time control (scrubbing) copy-and-paste, undo and redo, and muting (disables realtime VT output). To support its use as an experimental tool, user interactions are logged; start / stop buttons allow the user to indicate when they began and completed their design process.

Macaron was built with HTML5 and JavaScript, using React, Reflux, D3, and Audiolet<sup>2</sup>. Real-time sound synthesis drove a C2 actuator. To leave hands free for keyboard and mouse, the C2 is attached to a wristband; we simulate the design process for a wrist-worn wearable (as in [240]).

*Evaluation Versions:* To study how examples impact design, we made four gallery versions by sampling two theoretical dimensions of example access: element *incorporability* and internal parameter *visibility* (Figure 5.3, Table 5.1). We hypothesized these would affect users’ design processes, e.g., incorporable exam-

---

<sup>2</sup>[facebook.github.io/react](https://facebook.github.io/react), [github.com/reflux](https://github.com/reflux), [d3js.org](https://d3js.org), [github.com/oampo/Audiolet](https://github.com/oampo/Audiolet)

hi	Full access to gallery examples, with keyframes visible and selectable for copy and paste. Simulates source visibility, <i>e.g.</i> , viewing the source of a web page or having access to a .psd PhotoShop document.
sample	Hides underlying parameters of frequency and amplitude, whereas waveform regions (underlying keyframes) may be copied and pasted into a design, simulating example mixing in absence of visibility into underlying construction. While possible to see underlying representation by copying the entire example, the steps are indirect and inconvenient.
vis	Reveals underlying parameters, but hides keyframes, parameter scales, selection and copy/paste features. The inverse of sample, it exposes example structure, but does not support incorporating example elements into a design.
lo	Supplies a “black box” outer representation. Playback and visualization of the complete vibration reflect the status quo of non-visible, non-mixable example libraries.
none	No examples present.

**Table 5.1:** Macaron tool alternatives, varied on dimensions of internal visibility and element incorporability.

ples would encourage “mixing and matching” of examples, visibility might provide insight.


We compared these versions with each other and with a non-example version: none. In all versions with examples, the user can play or scrub the example, feeling it and seeing the waveform visualization. We did not allow users to modify the examples, to avoid study workflow confounds. To populate the gallery, we chose or adapted seven examples from [240], piloted them to confirm example variety, then regenerated keyframed versions with Macaron.

## 5.5 Study Methods

Participants were tasked with creating a sensation to accompany five animations (Figure 5.4) – SVGs (scalable vector graphics) which can be played or scrubbed by the same means as navigating Macaron’s time control. We chose animation variety (concrete to abstract) and complexity to inspire non-obvious solutions without overwhelming.

Participants were first trained on none with no animation, then presented with

five animation/version combinations. As the least crucial source of variance, animations were presented in Figure 5.4’s constant order, while interface versions were counterbalanced in two 5x5 Latin square designs. Thus, each participant encountered each animation and each interface version once; over all participants, each animation/version combination appeared twice, with Latin squares balancing 1st-order carry-over effects. This design confounds learning with animation task. We believe this is an acceptable tradeoff at this stage, allowing us balance interface order with a single participant session of reasonable length (1-1.5h).

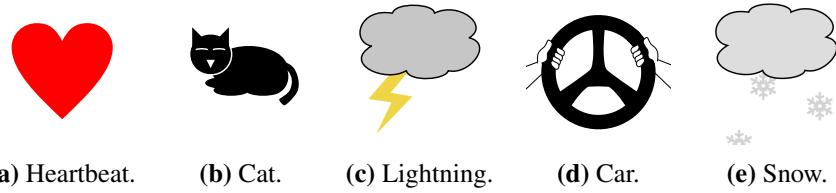


**Figure 5.4:** Animations used as design tasks, in presentation order. Heartbeat expands in two beats; the cat’s back expands as breathing and purring; lightning has two arrhythmic bolts; the car oscillates up and down, and makes two turns: left then right; snow has three snowflakes float down.

## 5.6 Results

We targeted a study size of 10 complete participants for a balanced Latin square design, and a manageable sample size for rich, exploratory, qualitative analysis. 13 untrained participants were recruited: P1-10 (7 female, ages 22-35) completed all five tasks, while I1-3 (2 female, ages 29-45) only completed the first three due to time restrictions. Because I1-3 (and P9) all had the same interface order (10, none, vis, hi, sample), we suspect that beginning with ‘sparse’ versions gave insufficient insight into how to design quickly enough to finish the study. I1-3 showed no distinct patterns beyond this; we leave their data for future analysis.

*Analysis and Data:* A team member trained in qualitative methods analyzed screen recordings, interviews, and logs with grounded theory methods (memoing, open & closed coding [49]) and thematic analysis and clustering [187]. We visualized logs using D3 (Figure 5.5). We chose a qualitative analysis because our goal was to capture the design process, not compare Macaron with previous tools. Our

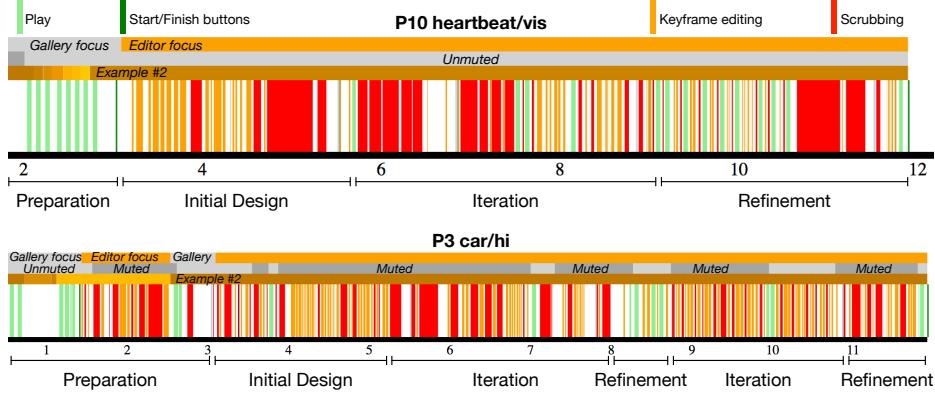

**Figure 5.5:** Log visualizations showing archetypal design process. Top: P10’s heartbeat/vis condition (an “ideal” version). Bottom: P3’s car/hi condition (variations: a return to example browsing after editing, repeated refinement, muted editing).

analysis exposed three major qualitative findings, discussed below.

*Tool Usability:* Overall, the tool was well received, described as “*easy to use*” (P1), “*well made*” (P5), “*pretty neat*” (P9), “*the templates help a lot*” (P3).

*Completion time:* Overall mean task completion time for P1-10 was 5m48s (median 4m48s, sd 3m52s, min 40s, max 18m23s). We conducted two one-way ANOVAs on completion time; neither interface ( $p = 0.87$ ) nor task ( $p = 0.64$ ) had a significant effect.

### 5.6.1 Archetypal Design Process

Log visualizations (Figure 5.5) show that users could and did employ Macaron for all key design stages: preparation, initial design, iteration, and refinement. All participants followed this sequence. Some omitted one or more steps depending on personal style and strategies for using examples (below). We list observations of the basic process in Table 5.2, to document behaviour and frame discussion.

### 5.6.2 Micro Interaction Patterns Enabled by Tool

Several small-scale patterns further characterize behaviour within the archetypal process.

<b>Prepare</b>	All participants began with a problem preparation step [271]. They played the animation to understand the problem, then typically looked at several (sometimes all) examples. Only P2, P8, and P9 had a task where they did not begin with an example. Otherwise, participants browsed examples, chose a best match to the animation (“ <i>I was trying to find the best match with the visual</i> ” (P7, heartbeat/hi)), then transferred into initial design. Participants rarely returned to examples for more exploration; only P3 (car/hi) and P5 (car/lo) switched to a different example after beginning their initial design. Preparation is characterized by a large number of plays and example switches: on average, 47.45% of all session plays were before the first edit (sd 30.15%), and participants switched examples an average of 6.75 times (sd 5.17).
<b>Initial Design</b>	Participants either used their example choice to help create their initial design, or ignored it because it wasn’t close enough to what they wanted to do. Participants typically recreated the example in their editor by copy/paste of the entire design (P1,2,4-8,10) or sometimes a component (P3,10) in incorporable conditions (hi and sample), or by manually recreating the design (P5,6) or a component (7,10) with vis. In the lo condition, we only observed P5 somewhat recreating an example. Occasionally, participants would create a new design loosely based on the example rather than recreating it (P3,4,6-8), when using the <i>Inspire</i> example use strategy (described later).
<b>Iterate</b>	Participants refined designs with longer periods of editing typically book-ended by playing the entire design (discussed as “real-time feedback” micro interaction pattern). In some cases, especially when the example was “close enough”, participants skipped iteration ( <i>Adjust</i> or <i>Select</i> example use strategies, described later).
<b>Refine</b>	Smaller changes forecast design conclusion, e.g., incremental global changes: constant frequency (P1,2,5,6,10), alignment (P1,3,6), or pulse height adjustment (P1,3,8,10). This step is sometimes visible in activity logs, as most participants (P1,3-10) exhibited more frequent plays of the entire design, and shorter periods of editing/scrubbing. Occasionally, participants repeated larger iterations and refinement (P3 car/hi, Figure 5.5).

**Table 5.2:** Steps in observed archetypal design process.

**Different paths through the interface** – We saw three design-path strategies.

– *Time* (Figure 5.6a; P1,2,3,4,7,9): proceed through the timeline, creating amplitude and frequency at the same time.

– *Component* (Figure 5.6b, P1,4,6,8,10): iterate on a design element, then repeat or copy/paste it later in time.

– *Track* (Figure 5.6c, P2,3,6,7,8-10): proceed through one entire *track* (typically amplitude), then the other one.


Strategies were often combined hierarchically. P6 developed a car/lo component by track (amplitude, then frequency). Wanting additional flexibility, P1,3,7 requested copy/paste between tracks: “*The one thing I found missing was copy and pasting between amplitude and frequency*” (P7).

Further showing diverse workflows, participants requested more powerful controls to work with keyframes as a group, such as widen (P5), reverse (P7), shift everything (P9), move up/down and smooth (P4). Other requested features include looping (P1), hovering over a point to see the value (P1), more detail through a zoomable interface (P4).


**Alignment and Copy/Paste are Precise, Convenient** – Precision was valued; alignment and copy/paste were used to achieve it. Alignment was sought both in time and to keyframe values. A common technique (Figure 5.6ab) was to use the red playhead like a plumb-line to align keyframes with animation features (P1-5,7,9,10) and between the two tracks (amplitude and frequency) (P3-5,7,9,10): “*Using that red arrow thing and placing the dots when it makes the heartbeat*” (P2). Some participants, including those who used the plumb-line, requested more refined alignment features: “*I couldn’t keep it straight*” (P1).

Copy/paste was used for improved work efficiency (especially helpful during initial layout or when creating long or repeating designs) and precision: “*Copy and paste...was also the most precise, because if you feel like it’s a perfect fit, you can use it exactly*” (P6). Correspondingly, conditions without copy/paste (*i.e.*, lo and vis) took additional effort: “*It’s harder...because there’s no copy and paste*” (P5). Precision also depended on context: “*For monitoring someone’s health, you would have to be very accurate*” (P9)


**Editing and playback** – During iteration, participants edited in bursts of primarily scrubbing activity, bookended by full playthroughs. They took time to re-

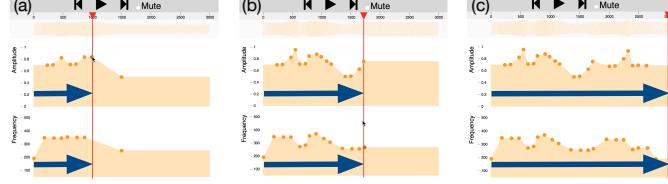

**(a)** P9’s cat/none design progressed sequentially in time. Note the red playhead helping alignment in (b).

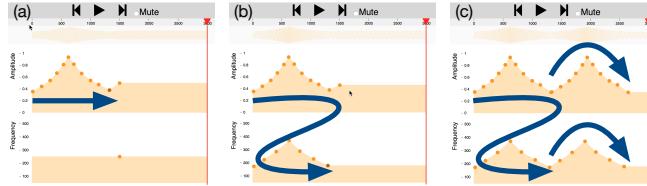

**(b)** P6’s car/1○ design progressed by component, developing the component then repeating it.

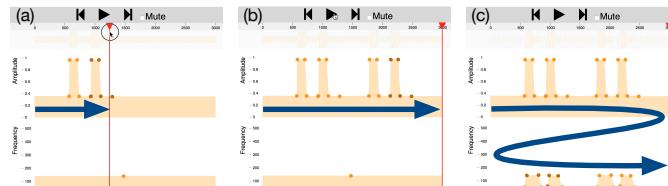


**(c)** P10’s heartbeat/vis design progressed by track. Amplitude was developed first, then frequency.

**Figure 5.6:** Participants created their designs using different progression paths, suggesting flexibility.

alize each new version of the design before observing an overview. When editing, participants scrubbed back-and-forth, varying speed (P1-4,7,9,10), and dragging keyframes to try ideas out (P1,3,4,7,9,10). Figure 5.7. This feature was valued by those who used it: “*The real-time part is pretty important*” (P1); some rarely played, showing more frequent or longer periods of scrubbing instead (P2,9,10). Others rarely scrubbed (P5, P8), possibly to have an overall sense of the design: “*Trying to get a general sense of how it might feel*” (P8). P3, P4, and P7 all exhibited focused editing with mute enabled, unmuting for the bookended play sections; others did not use muting.

**Encoding and Framing** – Some participants encoded parameters using consis-

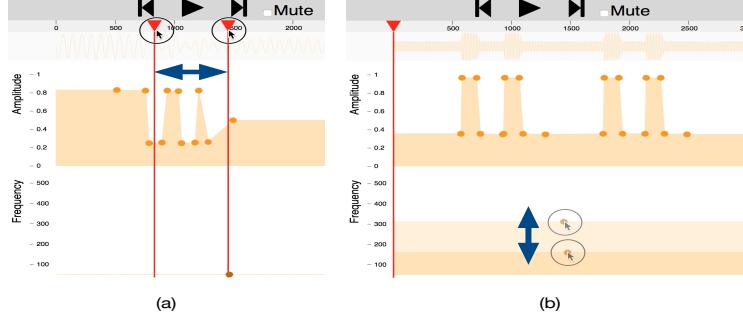

**Figure 5.7:** Participants used real-time feedback to explore, both (a) in time by scrubbing back and forth (P3 lightning/1○), and (b) by moving keyframes (P10 heartbeat/vis).

tent rules, often aligned to events like heartbeats or lightning bolts. Others sought to create moods or metaphors for sensation.

Encoding was most visible in the lightning task, where participants represented lightning bolts in regular ways: “*if there was a lightning bolt on the left, I put amplitude and frequency a little longer than a lightning bolt on the right*” (P9). When the animation had two simultaneous bolts, several (P2-4,7,9) encoded it by superimposing two bolt representations on top of one another. Participants were forced to reframe their encoding strategy: “*...two [lightning bolts]...I divided it into two equal partitions, .6 and 1*” (P7).

Encoding failed when participants did not find a direct mapping: “*When the three [snow flakes] come together I think my strategy broke down*” (P7). Metaphors helped in these cases. Car took extra imagination, either for the experience of driving (P6, P8, and P9 didn’t drive), or because it’s hard to “*know what it would feel like on the wrist*” (P1). P6 describes her process for both lightning and snow as using mood: “*...what I think the mood is...like snow fall, it’s kinda like, very gentle and calm*” (P6).

### 5.6.3 Example Use

As seen, examples played a major role in users’ design processes. Analysis revealed the effect of examples to be more nuanced than a one-to-one mapping of

<b>Ignore</b>	Deliberately do not choose an example, through either lack of match: “ <i>I didn’t [find] the examples that I wanted</i> ” (P1); a desire to challenge themselves or be creative: “ <i>I wanted to do my own thing!</i> ” (P9); or difficulty in using the examples.
<b>Inspire</b>	Choose an example, but do not explicitly copy/paste or replicate it in the editor; instead, design based loosely on example parts, sometimes as an adaptation from memory: “ <i>I just tried to remember what the keyframes were like before, and then I modified it</i> ” (P6 car/1o).
<b>Template</b>	Choose an initial example, but alter it considerably. In this case, participants use the example to expedite the process.
<b>Adjust</b>	Find an initial example, skipped major iteration and went directly to the refine stage, sometimes because the example was a close match. To enable this, some participants wanted a more powerful manipulation methods, like inverting (P7).
<b>Select</b>	Copy/paste an example (or manually recreate it), then do not modify; sometimes because the example seemed to match: “ <i>...copy and paste, then confirmed it was the same.</i> ” (P5)

**Table 5.3:** Strategies used by participants to directly use examples as a starting point. Ignore and Inspire did not start with copy/paste; Template, Adjust, and Select did, with varying amounts of editing afterwards. When copy/paste was not available, manual re-creation was used as a stand-in.

the theoretical dimensions of incorporability and visibility. Emergent themes were instead organized on the *role* of examples: as a *direct starting point* for each design; and to *indirectly scaffold learning* throughout a session. The latter was related to additional themes: task difficulty and individual differences.

#### *Direct example use – task starting point –*

When participants *prepared* for each task by browsing to find a best-match example, then using it as a starting point, they did this with a spectrum of strategies. These strategies, elaborated in Table 5.3, range from Ignore (examples not used) to Select (an example was the final design).

*Indirect example use – observe how to design* – Over the course of the session, participants used underlying structures of examples to understand how to design VT icons. This was most evident in the none or 1o condition after participants were first exposed to examples: “*I sort of remembered*” (P4 car/none). Some explicitly described learning: “*It gave me a general idea of thinking in big shapes*

*rather than little dots*" (P9 lightning/vis).

Most participants commented on the difficulty or ease of their task (P1-5, 7-9). Task difficulty was connected learning ("It's easy...maybe it's more experience" (P4 snow/10)) and individual differences. Some people were motivated to learn, and challenge themselves; others were not.

Connections between these factors are complex and difficult to unravel with this data. We speculate on the utility of flow theory [54] as a useful lens to connect these issues, as it considers creativity, education, and the relationship between perceived challenge and perceived ability. We plan to use it to frame future exploration.

## 5.7 Discussion

We discuss implications for design, then limitations we hope to progress on with future work.

### 5.7.1 Implications for Design

**Expose example structures for learning** – When exposed to examples' underlying structure, participants are able to build their repertoire and learn VT design conventions like "big shapes" (P9). Such scaffolding is particularly crucial in an environment where experienced VT designers and training possibilities are rare. Whether through exploratory tool use or structured with online training programs, examples can expand the VT design practices available to novice designers.

**Examples as templates** – Participants typically copied an example first before iterating and customizing, suggesting a template model of modifiable source documents as a way to expose structure and reduce effort for designers.

**Example Recommender** – The time participants spent searching for the suitable examples suggests a recommender system could be very valuable. AI techniques might recommend examples similar (or dissimilar) to a source stimuli, as with previous tools in other sensory modalities [154] and VT visualization tools like VibViz [240].

**Clarify example context** – Participants often repeated gallery searches for each new animation; they needed to compare examples alongside the target graphic.

In addition, though our examples were designed independently of our animation tasks, some participants showed confusion about whether they were supposed to match. Clarifying the context for each example, by presenting it either in connection to its original design goal or as a candidate for the participant’s current goal, will help participants choose an example.

***Hideable examples*** – Some participants wanted to be individualistic with their designs and actively disliked the most powerful `hi` condition, saying that the `none` condition was cleaner, or that while examples were helpful to learn, they felt “more creative” with fewer examples present. A hideable gallery, which can be opened when needed but kept hidden otherwise, could accommodate user preference. An intelligent gallery could even time example appearances or suggestions to occur at helpful design stages, e.g., by recognizing by activity patterns [67, 271].

***Realtime “prefeel” then render*** – Macaron’s real-time feedback supported exploration, with full play-throughs providing an overview or evaluation in-between editing sessions. In addition, P4, who was familiar with haptics, felt that the scrubbing synthesis was “muddy” relative to waveforms pre-rendered with audio tools – a common challenge, noted also by the researchers but deemed suitable for this study. While we hope this technology deficit inspires improved realtime rendering algorithms, it also suggests an explicit workflow compromise. Many video editing and compositing tools show a low-resolution previsualization in design mode; a clip is then fully rendered for playback. For tactile design, coarse, “prefeel” sensations would be synthesized for immediate feedback during a rough design stage, and a high-fidelity rendering generated for less frequent play-throughs. This could help computationally demanding, perceptually-based models or multi-actuator setups (e.g., tactile animation [233] as a prefeel for tactile brush [125]).

***Tool flexibility*** – Macaron was used in very different ways depending on the participant. Some progressed by time, by track, by component, or a combination thereof. Some mirrored frequency and amplitude, using them together, while others used them to express different ideas. This suggests that tools should be flexible and accommodate different strategies; perhaps offering a choice to group by parameters (e.g., [233]) or work along parameter tracks (e.g., [257, 258]).

***Alignment tools*** – Participants frequently used the playhead for alignment, finding locations in the video or aligning points between amplitude and frequency.

Participants requested using modifier keys to align points (as in other editing tools), or a visualization of events in video. This suggests several features, providing ability to:

- Align comparison sensations from each modality - visual or audio sensation alongside VT.
- Place anchors for attaching a VT sensation (or keyframe within it) to a point in a target visual or audio sensation. This might be automatically assisted, e.g, with video analysis techniques to find scene changes.
- Automatically align keyframes to nearby keyframes, or use a modifier key to constrain or nudge keyframe movement.

**Reuse** – Copy/paste, especially from a template, speeded design and facilitated otherwise tedious approaches. Several participants made use of element repetition, which had to be re-done upon design re-framing. While copy/paste was helpful, more powerful repetition tools (e.g. looping, and “master templates”, as in PowerPoint) would likely find use by many designers.

**Automated Encoding** – Some participants applied consistent rules in translating an animation to a tactile rendering – e.g., representing left/right lightning bolts differently in the lightning animation, or directly matching amplitude to up-down motion in the car animation. Some of these practices might be automated into generative rules. For example, video analysis could detect up/down motion for a visual object, and translate that automatically to a level for amplitude, similar to how motion trackers can track a moving object and link that to position of an animation; or, a designer might want to specify the mapping. More complex parameterizations could provide a useful tool for expert users, much like how `fmod` allows for parametrized audio in game design.

### 5.7.2 Limitations & Future work

Limitations in our study suggest future lines of inquiry: following up on additions study factor by deploying online.

**Study factors** – Our Latin square design allowed qualitative comparison of several gallery variants, but did not have the power for comparative statistical tests between the alternatives. Meanwhile, five design tasks presented in a uniform order

did not permit systematic insights into other factors: learning, or task features such as abstractness and complexity. Flow was identified after-the-fact as an important framework for future analysis, but only after our study was designed and data was collected.

Our proposed example-usage dimensions of visibility and incorporability were a useful starting point, but did not line up well with the task processes that people actually used with Macaron. We did see behaviors that aligned well with *learning* and *design-starting* from examples, as well as hints of a more rich and nuanced view of what makes examples useful and in what way.

First, the examples-as-starting-point strategies actually used (Table 5.3) suggest that visibility and incorporability at minimum are not quite right and probably insufficient in dimensionality – there is a concept of edibility regardless of starting point; whereas incorporability could entail editing, but certainly requires an example as a start.

Additionally, observations (including details not reported due to space limits) suggest other factors that influence example use, e.g., *difficulty*, from task, interface and personal confidence and experience; and *task*, from task complexity and abstraction, user strategy, e.g. encoding and metaphor, and user confidence and experience. These hints are far from orthogonal, and will require further research, with focus turned to elements like task abstraction and user background, to disentangle and prioritize.

**Online deployment** – Triangulation will be helpful in studying factors like difficulty, task abstraction, and user background. In this study, Macaron was deployed and studied locally. We were able to validate the editor’s design support and utility of its logging methods, and expose many interesting insights into natural end-user design practices.

Our next plan to answer these questions is to deploy Macaron at a larger scale: online, as a free-to-use design tool for the haptics community, with an initial study in haptics courses. This will allow research *in-situ* with larger, more quantitative, remote-based methods for data collection, triangulated with the less scalable qualitative methods used in-lab. Interaction logs, use statistics, and A/B tests will help us further develop Macaron as a tool for VT design and more generally as a lens for the haptic design process.

## **5.8 Conclusion**


In this paper, we present initial findings from a vibrotactile (VT) design gallery, Macaron. This tool revealed insights both into how examples are used in VT design and implications for other VT design tools. Macaron was implemented using web tools, offering a unique opportunity to follow-up on the design process we observed here, helping designers to create engaging experiences while understanding their craft.

## **5.9 Acknowledgements**

We are grateful to our participants, labmates, and reviewers for all feedback. This work was supported by NSERC.

# Chapter 6

## Share: HapTurk

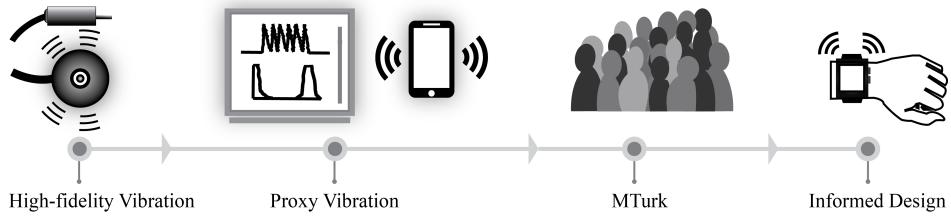

**Figure 6.1:** In HapTurk, we access large-scale feedback on informational effectiveness of high-fidelity vibrations after translating them into proxies of various modalities, rendering important characteristics in a crowdsource-friendly way.

**Preface** – While Chapters 3-5 describe iterative development of vibrotactile tools, with HapTurk<sup>1</sup> we study a vibrotactile technique. Here, we look into *browse*'s inverse: *share*, disseminating or storing a design concept for others' use. We focus on one aspect of *sharing*: disseminating designs over the Internet. In this case, the goal is to collect large-scale feedback. In other design domains, crowdsourcing platforms like Amazon's MTurk can deploy user studies and rapidly collect large samples. However, high-fidelity haptic sensations require specialized hardware, which most crowdsourced participants will not be able to access. We instead send more easily-shared stimuli: proxies, like visualizations and low-fidelity phone

<sup>1</sup>Schneider, Seifi, Kashani, Chun, and MacLean. (2016) *HapTurk: Crowdsourcing Affective Ratings for Vibrotactile Icons*. CHI '16.

vibrations. We found these proxies can convey some affective characteristics for some source stimuli, and identified several [guidelines](#) for developing better proxies.

## 6.1 Overview

Vibrotactile (VT) display is becoming a standard component of informative user experience, where notifications and feedback must convey information eyes-free. However, effective design is hindered by incomplete understanding of relevant perceptual qualities. To access evaluation streamlining now common in visual design, we introduce *proxy modalities* as a way to crowdsource VT sensations by reliably communicating high-level features through a crowd-accessible channel. We investigate two proxy modalities to represent a high-fidelity factor: a new VT visualization, and low-fidelity vibratory translations playable on commodity smartphones. We translated 10 high-fidelity vibrations into both modalities, and in two user studies found that both proxy modalities can communicate affective features, and are consistent when deployed remotely over Mechanical Turk. We analyze fit of features to modalities, and suggest future improvements.

## 6.2 Introduction

In modern handheld and wearable devices, vibrotactile (VT) feedback can provide unintrusive, potentially meaningful cues through wearables in on-the-go contexts [27]. With consumer wearables like Pebble and the Apple Watch featuring high-fidelity actuators, VT feedback is becoming standard in more user tools. Today, VT designers seek to provide sensations with various perceptual and emotional connotations to support the growing use cases for VT feedback (everyday apps, games, etc.). Although low-level design guidelines exist and are helpful for addressing perceptual requirements [20, 26, 121, 166, 264], higher-level concerns and design approaches to increase their usability and information capacity (e.g., a user’s desired affective response, or affective or metaphorical interpretation) have only recently received study and are far from solved [7, 128, 131, 191, 193, 239]. Tactile design thus relies heavily on iteration and user feedback [228]. Despite its importance [239, 240], collecting user feedback on perceptual and emotional (i.e., affective) properties of tactile sensations in small-scale lab studies is undermined

by noise due to individual differences (IDs).

In other design domains, crowdsourcing enables collecting feedback at scale. Researchers and designers use platforms like Amazon’s Mechanical Turk ([www.mturk.com](http://www.mturk.com)) to deploy user studies with large samples, receiving extremely rapid feedback in, e.g., creative text production [247], graphic design [278] and sonic imitations [36].

The problem with crowdsourcing tactile feedback is that the “crowd” can’t feel the stimuli. Even when consumer devices have tactors, output quality and intensity is unpredictable and uncontrollable. Sending each user a device is impractical.

What we need are crowd-friendly proxies for test stimuli. Here, we define a *proxy vibration* as a sensation that communicates key characteristics of a source stimulus within a bounded error; a *proxy modality* is the perceptual channel and representation employed. In the new evaluation process thus enabled, the designer translates a sensation of interest into a proxy modality, receives rapid feedback from a crowd-sourcing platform, then interprets that feedback using known error bounds. In this way, designers can receive high-volume, rapid feedback to use in tandem with costly in-lab studies, for example, to guide initial designs or to generalize findings from smaller studies with a larger sample.

To this end, we must first establish feasibility of this approach, with specific goals: **(G1)** Do proxy modalities work? Can they effectively communicate both physical VT properties (e.g., duration), and high-level affective properties (roughness, pleasantness)? **(G2)** Can proxies be deployed remotely? **(G3)** What modalities work, and **(G4)** what obstacles must be overcome to make this approach practical?

This paper describes a proof-of-concept for proxy modalities for tactile crowdsourcing, and identifies challenges throughout the workflow pipeline. We describe and assess two modalities’ development, translation process, validation with a test set translation, and MTurk deployment. Our two modalities are a new technique to graphically visualize high-level traits, and the low-fidelity actuators on users’ own commodity smartphones. Our test material is a set of 10 VT stimuli designed for a high-fidelity tactile display suitable for wearables (referred to as “high fidelity vibrations”), and perceptually well understood as presented by that type of display (Figure 6.7). We conducted two coupled studies, first validating proxy expressive-

ness in lab, then establishing correspondence of results in remote deployment. Our contributions are:

- A way to crowdsource tactile sensations (vibration proxies), with a technical proof-of-concept.
- A visualization method that communicates high-level affective features more effectively than the current tactile visualization standard (vibration waveforms).
- Evidence that both proxy modalities can represent high-level affective features, with lessons about which features work best with which modalities.
- Evidence that our proxy modalities are consistently rated in-lab and remotely, with initial lessons for compliance.

## 6.3 Related Work

We cover work related to VT icons and evaluation methods for VT effects, the current understanding of affective haptics, and work with Mechanical Turk in other modalities.

### 6.3.1 Existing Evaluation Methods for VT Effects

The haptic community has appropriated or developed many types of user studies to evaluate VT effects and support VT design. These target a variety of objectives:

- 1) *Perceptibility*: Determine the perceptual threshold or Just Noticeable Difference (JND) of VT parameters. Researchers vary the values of a VT parameter (e.g., frequency) to determine the minimum perceptible change [169, 205].
- 2) *Illusions*: Studies investigate effects like masking or apparent motion of VT sensations, useful to expand a haptic designer’s palette [108, 125, 242].
- 3) *Perceptual organization*: Reveal the underlying dimensionality of how humans perceive VT effects (which are generally different than the machine parameters used to generate the stimuli). Multidimensional Scaling (MDS) studies are common, inviting participants compare or group vibrations based on perceived similarity [39, 115, 202, 264, 268].

4) *Encoding abstract information*: Researchers examine salient and memorable VT parameters (e.g. energy, rhythm) as well as the number of VT icons that people can remember and attribute to an information piece [3, 26, 39, 264].

5) *Assign affect*: Studies investigate the link between affective characteristics of vibrations (e.g., pleasantness, urgency) to their engineering parameters (e.g., frequency, waveform) [147, 209, 264, 285]. To achieve this, VT researchers commonly design or collect a set of vibrations and ask participants to rate them on a set of qualitative metrics.

6) *Identify language*: Participants describe or annotate tactile stimuli in natural language [39, 98, 120, 191, 240, 264].

7) *Use case support*: Case studies focus on conveying information with VT icons such as collaboration [39], public transit [27] and direction [7, 27], or timing of a presentation [259]. In other cases, VT effects are designed for user engagement, for example in games and movies, multimodal storytelling, or art installations [128, 288]. Here, the designers use iterative design and user feedback (qualitative and quantitative with user rating) to refine and ensure effective design.

All of the above studies would benefit from the large number of participants and fast data collection on MTurk. In this paper, we chose our methodology so that the results are informative for a broad range of these studies.

### 6.3.2 Affective Haptics

VT designers have the challenge of creating perceptually salient icon sets that convey meaningful content. A full range of expressiveness means manipulating not only a vibration's physical characteristics but also its perceptual and emotional properties, and collecting feedback on this. Here, we refer to all these properties as affective characteristics.

Some foundations for affective VT design are in place. Studies on tactile language and affect are establishing a set of perceptual metrics [191, 240]. Guest *et al* collated a large list of emotion and sensation words describing tactile stimuli; then, based on multidimensional scaling of similarity ratings, proposed comfort or pleasantness and arousal as key dimensions for tactile emotion words, and rough/smooth, cold/warm, and wet/dry for sensation [191]. Even so, there is not

yet agreement on an affective tactile design language [131].

Recently, Seifi *et al* compiled research on tactile language into five taxonomies for describing vibrations [240]. **1) Physical properties** that can be measured: e.g., duration, energy, tempo or speed, rhythm structure; **2) sensory properties**: roughness, and sensory words from Guest *et al*'s touch dictionary [98]; **3) emotional interpretations**: pleasantness, arousal (urgency), dictionary emotion words [98]; **4) metaphors** provide familiar examples resembling the vibration's feel: heartbeat, insects; **5) usage examples** describe events which a vibration fits: an incoming message or alarm.


To evaluate our vibration proxies, we derived six metrics from these taxonomies to capture vibrations' physical, sensory and emotional aspects: 1) duration, 2) energy, 3) speed, 4) roughness, 5) pleasantness, and 6) urgency.

### 6.3.3 Mechanical Turk (MTurk)

MTurk is a platform for receiving feedback from a large number of users, in a short time at a low cost [111, 146]. These large, fast, cheap samples have proved useful for many cases including running perceptual studies [111], developing taxonomies [47], feedback on text [247], graphic design [278], and sonic imitations [36].

Crowdsourced studies have drawbacks. The remote, asynchronous study environment is not controlled; compared to a quiet lab, participants may be subjected to unknown interruptions, and may spend less time on task with more response variability [146]. MTurk is not suitable for getting rich, qualitative feedback or following up on performance or strategy [176]. Best practices – e.g., simplifying tasks to be confined to a singular activity, or using instructions complemented with example responses – are used to reduce task ambiguity and improve response quality [5]. Some participants try to exploit the service for personal profit, exhibiting low task engagement [69], and must be pre- or post-screened.

Studies have examined MTurk result validity in other domains. Most relevantly, Heer *et al* [111] validated MTurk data for graphical perception experiments (spatial encoding and luminance contrast) by replicating previous perceptual studies on MTurk. Similarly, we compare results of our local user study with an MTurk

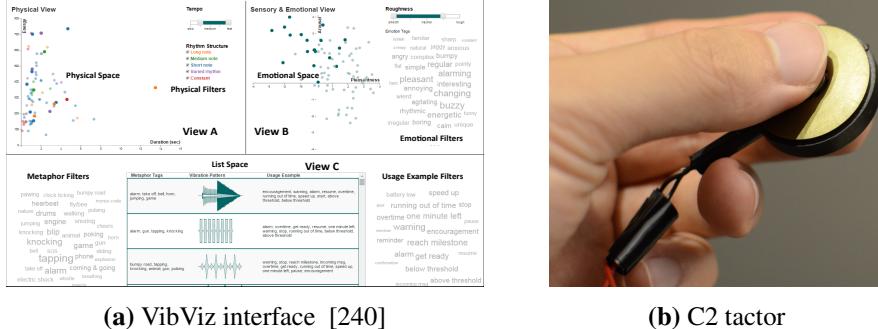


**Figure 6.2:** Source of high-fidelity vibrations and perceptual rating scales.

study to assess viability of running VT studies on MTurk, and collect and examine phone properties in our MTurk deployment.

*Need for HapTurk:* Our present goal is to give the haptic design community access to crowdsourced evaluation so we can establish modality-specific methodological tradeoffs. There is ample need for huge-sample haptic evaluation. User experience of transmitted sensations must be robust to receiving device diversity. Techniques to broadcast haptic effects to video [145, 183], e.g., with YouTube [1] or MPEG7 [70, 71] now require known high-fidelity devices because of remote device uncertainty; the same applies to social protocols developed for remote use of high-quality vibrations, e.g. in collaborative turn taking [39]. Elsewhere, studies of VT use in consumer devices need larger samples: e.g., perceivability [139], encoding of caller parameters [24], including caller emotion and physical presence collected from pressure on another handset [114], and usability of expressive, customizable VT icons in social messaging [129]. To our knowledge, this is the first attempt to run a haptic study on a crowdsource site and characterize its feasibility and challenges for haptics.

## 6.4 Sourcing Reference Vibrations and Qualities

We required a set of exemplar source vibrations on which to base our proxy modalities. This set needed to 1) vary in physical, perceptual, and emotional characteristics, 2) represent the variation in a larger source library, and 3) be small enough

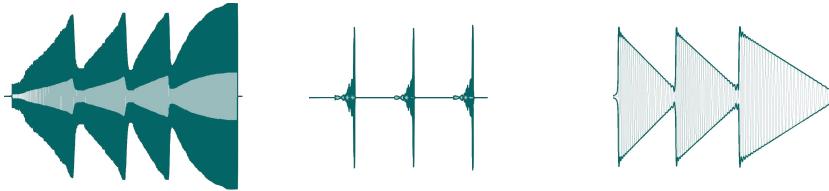

**Figure 6.3:**  $\text{VIS}_{\text{DIR}}$  visualization, based on VibViz

for experimental feasibility.

#### 6.4.1 High-Fidelity Reference Library


We chose 10 vibrations from a large, freely available library of 120 vibrations (VibViz, [240]), browsable through five descriptive taxonomies, and ratings of taxonomic properties. Vibrations were designed for an Engineering Acoustics C2 tacter, a high-fidelity, wearable-suitable voice coil, commonly used in haptic research [240]. We employed VibViz’s filtering tools to sample, ensuring variety and coverage by selecting vibrations at high and low ends of energy / duration dimensions, and filtering by ratings of temporal structure/rhythm, roughness, pleasantness, and urgency. To reduce bias, two researchers independently and iteratively selected a set of 10 items each, which were then merged.

Because VibViz was designed for a C2 tacter, we used a handheld C2 in the present study (Figure 6.2b).

#### 6.4.2 Affective Properties and Rating Scales

To evaluate our proxies, we adapted six rating scales from the tactile literature and new studies. Seifi *et al* [240] proposed five taxonomies for describing vibrations including physical, sensory, emotional, metaphors, and use examples. Three taxonomies comprise quantitative metrics and adjectives; two use descriptive words.

We chose six quantitative metrics from [240] that capture important affective (physical, perceptual, and emotional) VT qualities: 1) *duration* [low-high], 2) *energy* [low-high], 3) *speed* [slow-fast], 4) *roughness* [smooth-rough], 5) *urgency* [relaxed-alarming], and 6) *pleasantness* [unpleasant-pleasant]. A large scale (0-100) allowed us to treat the ratings as continuous variables. To keep trials quick

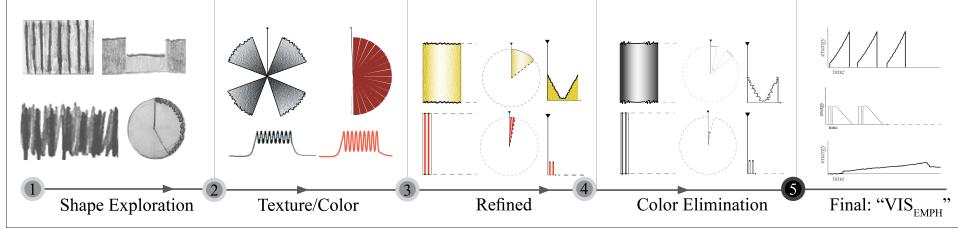

**Figure 6.4:** Visualization design process. Iterative development and piloting results in the  $\text{VIS}_{\text{EMPH}}$  visualization pattern.

and MTurk-suitable, we did not request open-ended responses or tagging.

## 6.5 Proxy Choice and Design



The proxies' purpose was to capture high-level traits of source signals. We investigated two proxy channels and approaches, to efficiently establish viability and search for triangulated perspectives on what will work. The most obvious starting points are to 1) visually augment the current standard of a direct trace of  $amplitude = f(\text{time})$ , and 2) reconstruct vibrations for common-denominator, low-fidelity actuators.

We considered other possibilities (e.g., auditory stimuli, for which MTurk has been used [36], or animations). However, our selected modalities balance a) directness of translation (low fidelity could not be excluded); b) signal control (hard to ensure consistent audio quality/volume/ambient masking); and c) development progression (visualization underlies animation, and is simpler to design, implement, display). We avoided multisensory combinations at this early stage for clarity of results. Once the key modalities are tested, combinations can be investigated in future work.

“REF” denotes high-fidelity source renderings (C2 factor).

**1) Visual proxies:** Norms in published works (e.g. [39]) directed [240] to confirm that users rely on graphical  $f(\text{time})$  plots to skim and choose from large libraries. We tested the direct plot,  $\text{VIS}_{\text{DIR}}$ , as the status quo representation.

However, these unmodified time-series emphasize or mask traits differently than felt vibrations, in particular for higher-level or “meta” responses. We consid-

Example	Roughness	Energy		Duration
	by the line's roughness	by the line's thickness &	by height	by the length of the x-axis
	rough  so-so  smooth 	high  medium  low 	high medium low	longest  short  (compared to the longest)

**Figure 6.5:** Final VIS<sub>EMPH</sub> visualization guide, used by researchers to create VIS<sub>EMPH</sub> proxy vibrations and provided to participants during VIS<sub>EMPH</sub> study conditions.

ered many other means of visualizing vibration characteristics, pruned candidates and refined design via piloting to produce a new scheme which explicitly *emphasizes* affective features, VIS<sub>EMPH</sub>.

**2) Low-fidelity vibration proxy:** Commodity device (e.g. smartphone) actuators usually have low output capability compared to the C2, in terms of frequency response, loudness range, distortion and parameter independence. Encouraged by expressive rendering of VT sensations with commodity actuation (from early constraints [39] to deliberate design-for-lofi [129]), we altered stimuli to convey high-level parameters under these conditions, hereafter referred to as LOFIVIB.

**Translation:** Below, we detail first-pass proxy development. In this feasibility stage, we translated proxy vibrations manually and iteratively, as we sought generalizable mappings of the parametric vibration definition to the perceptual quality we wished to highlight in the proxy. We frequently relied on a cycle of user feedback, e.g., to establish the perceived roughness of the original stimuli and proxy candidate.

Automatic translation is an exciting goal. Without it, HapTurk is still useful for gathering large samples; but automation will enable a very rapid create-test cycle. It should be attainable, bootstrapped by the up-scaling of crowdsourcing itself. With a basic process in place, we can use MTurk studies to identify these mappings relatively quickly.

### **6.5.1 Visualization Design ( $\text{VIS}_{\text{DIR}}$ and $\text{VIS}_{\text{EMPH}}$ )**

$\text{VIS}_{\text{DIR}}$  was based on the original waveform visualization used in VibViz (Figure 6.3). In Matlab, vibration frequency and envelope were encoded to highlight its pattern over time. Since  $\text{VIS}_{\text{DIR}}$  patterns were detailed, technical and often inscrutable for users without an engineering background, we also developed a more interpretive visual representation,  $\text{VIS}_{\text{EMPH}}$ ; and included  $\text{VIS}_{\text{DIR}}$  as a status-quo baseline.

We took many approaches to depicting vibration high-level properties, with visual elements such as line thickness, shape, texture and colour (Figure 6.4). We first focused on line sharpness, colour intensity, length and texture: graphical waveform smoothness and roughness were mapped to perceived roughness; colour intensity highlighted perceived energy. Duration mapped to length of the graphic, while colour and texture encoded the original's invoked emotion.


Four participants were informally interviewed and asked to feel REF vibrations, describe their reactions, and compare them to several visualization candidates. Participants differed in their responses, and had difficulties in understanding VT emotional characteristics from the graphic (i.e. pleasantness, urgency), and in reading the circular patterns. We simplified the designs, eliminating representation of emotional characteristics (color, texture), while retaining more objective mappings for physical and sensory characteristics.

$\text{VIS}_{\text{EMPH}}$  won an informal evaluation of final proxy candidates ( $n=7$ ), and was captured in a translation guideline (Figure 6.5).

### **6.5.2 Low Fidelity Vibration Design**

For our second proxy modality, we translated REF vibrations into LOFIVIB vibrations. We used a smartphone platform for their built-in commodity-level VT displays, their ubiquity amongst users, and low security concerns for vibration imports to personal devices [79]. To distribute vibrations remotely, we used HTML5 Vibration API, implemented on Android phones running compatible web browsers (Google Chrome or Mozilla Firefox).


As with  $\text{VIS}_{\text{EMPH}}$ , we focused on physical properties when developing LOFIVIB (our single low-fi proxy exemplar). We emphasized rhythm structure, an important

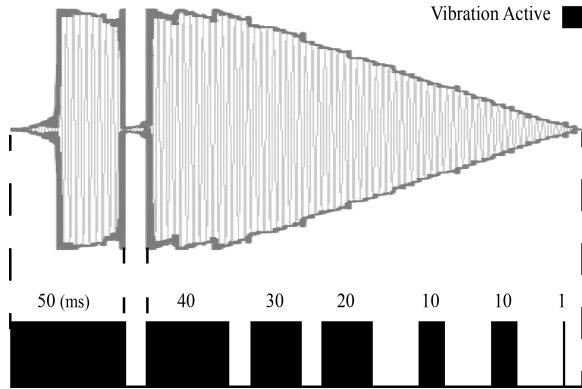

**Figure 6.6:** Example of LOFIVIB proxy design. Pulse duration was hand-tuned to represent length and intensity, using duty cycle to express dynamics such as ramps and oscillations.

design parameter [264] and the only direct control parameter of the HTML5 API, which issues vibrations using a series of on/off durations. Simultaneously, we manipulated perceived energy level by adjusting the actuator pulse train on/off ratio, up to the point where the rhythm presentation was compromised. Shorter durations represented a weak-feeling hi-fi signal, while longer durations conveyed intensity in the original. This was most challenging for dynamic intensities or frequencies, such as increasing or decreasing ramps, and long, low-intensity sensations. Here we used a duty-cycle inspired technique, similar to [129], illustrated in Figure 6.6.

To mitigate the effect of different actuators found in smartphones, we limited our investigation to Android OS. While this restricted our participant pool, there was nevertheless no difficulty in quickly collecting data for either study. We designed for two phones representing the largest classes of smartphone actuators: Samsung Galaxy Nexus, which contains a coin-style actuator, and a Sony Xperia Z3 Compact, which uses a pager motor resulting in more subdued, smooth sensations. Though perceptually different, control of both actuator styles are limited to on/off durations. As with  $\text{VIS}_{\text{EMPH}}$ , we developed LOFIVIB vibrations iteratively, first with team feedback, then informal interviews ( $n=6$ ).

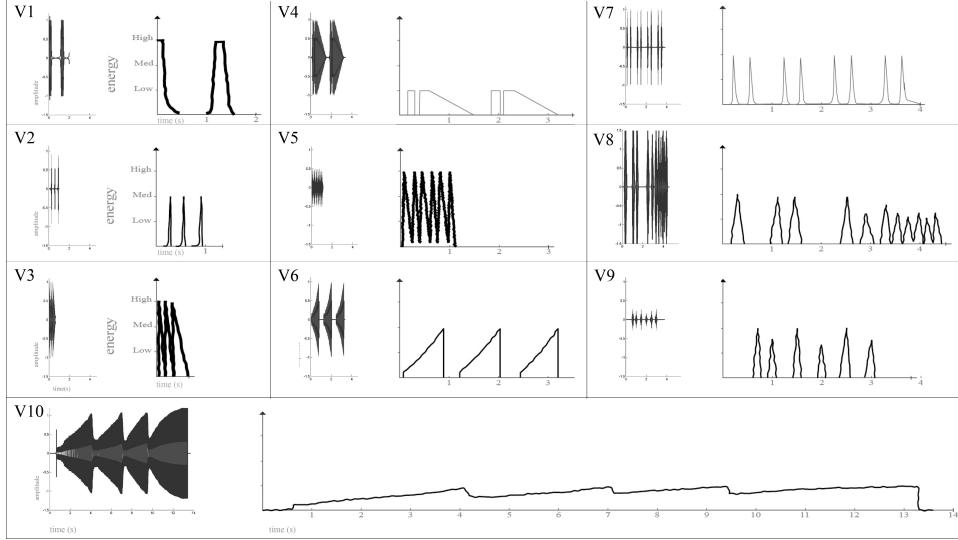

**Figure 6.7:** Vibrations visualized as both  $\text{VIS}_{\text{DIR}}$  (left) and  $\text{VIS}_{\text{EMPH}}$ .

## 6.6 Study 1: In-lab Proxy Vibration Validation (G1)

We obtained user ratings for the hi-fi source vibrations REF and three proxies ( $\text{VIS}_{\text{DIR}}$ ,  $\text{VIS}_{\text{EMPH}}$ , and  $\text{LOFIVIB}$ ). An in-lab format avoided confounds and unknowns due to remote MTurk deployment, addressed in Study 2. Study 1 had two versions: in one, participants rated visual proxies  $\text{VIS}_{\text{DIR}}$  and  $\text{VIS}_{\text{EMPH}}$  next to REF; and in the other,  $\text{LOFIVIB}$  next to REF.  $\text{REF}_{\text{VIS}}$  and  $\text{REF}_{\text{LOFIVIB}}$  denote these two references, each compared with its respective proxy(ies) and thus with its own data. In each substudy, participants rated each REF vibration on 6 scales [0-100] in a computer survey, and again for the proxies. Participants in the visual substudy did this for both  $\text{VIS}_{\text{DIR}}$  and  $\text{VIS}_{\text{EMPH}}$ , then indicated preference for one. Participants in the lo-fi study completed the  $\text{LOFIVIB}$  survey on a phone, which also played vibrations using Javascript and HTML5; other survey elements employed a laptop. 40 participants aged 18-50 were recruited via university undergraduate mailing lists. 20 (8F) participated in the visual substudy, and a different 20 (10F) in the low-fi vibration substudy.

Reference and proxies were presented in different random orders. Pilots confirmed that participants did not notice proxy/target linkages, and thus were unlikely

to consciously match their ratings between pair elements. REF/proxy presentation order was counterbalanced, as was  $\text{VIS}_{\text{DIR}}/\text{VIS}_{\text{EMPH}}$ .

### 6.6.1 Comparison Metric: Equivalence Threshold

To assess whether a proxy modalities were rated similarly to their targets, we employed *equivalence testing*, which tests the hypothesis that sample means are within a threshold  $\delta$ , against the null of being outside it [236]. This tests if two samples are equivalent with a known error bound; it corresponds to creating confidence intervals of means, and examining whether they lie entirely within the range  $(-\delta, \delta)$ .


We first computed least-squares means for the 6 rating scales for each proxy modality and vibration. 95% confidence intervals (CI) for REF rating means ranged from 14.23 points (Duration ratings) to 20.33 (Speed). Because estimates of the REF “gold standard” mean could not be more precise than these bounds, we set equivalence thresholds for each rating equal to CI width. For example, given the CI for Duration of 14.23, we considered proxy Duration ratings equivalent if the CI for a difference fell completely in the range  $(-14.23, 14.23)$ . With pooled standard error, this corresponded to the case where two CIs overlap by more than 50%. We also report when a *difference* was detected, through typical hypothesis testing (i.e., where CIs do not overlap).

Thus, each rating set pair could be *equivalent*, *uncertain*, or *different*. Figure 6.9 offers insight into how these levels are reflected in the data given the high rating variance. This approach gives a useful error bound, quantifying the precision tradeoff in using vibration proxies to crowdsource feedback.

### 6.6.2 Proxy Validation (Study 1) Results and Discussion

#### Overview of Results

Study 1 results appear graphically in Figure 6.8. To interpret this plot, look for (1) equivalence indicated by bar color, and CI size by bar height (dark green/small are good); (2) rating richness: how much spread, vibration to vibration, within a cell indicates how well that parameter captures the differences users perceived;

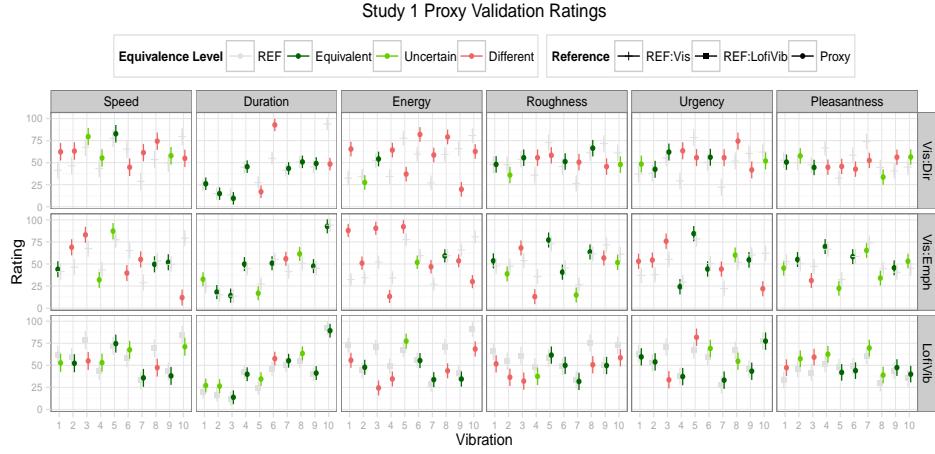


**Figure 6.8:** 95% confidence intervals and equivalence test results for Study 1 - Proxy Validation. Grey represents REF ratings. Dark green maps equivalence within our defined threshold, and red a statistical difference indicating an introduced bias; light green results are inconclusive. Within each cell, variation of REF ratings means vibrations were rated differently compared to each other, suggesting they have different perceptual features and represent a varied set of source stimuli.

(3) modality consistency: the degree to which the bars' up/down pattern translates vertically across rows. When similar (and not flat), the proxy translations are being interpreted by users in the same way, providing another level of validation. We structure our discussion around how the three modalities represent the different rating scales. We refer to the number of *equivalents* and *differents* in a given cell as  $[x:z]$ , with  $y = \text{number of } \textit{uncertains}$ , and  $x + y + z = 10$ .

### Duration and Pleasantness were translatable

Duration was comparably translatable for LOFIVIB [5:1] and VIS<sub>EMPH</sub> [6:1]; VIS<sub>DIR</sub> was less consistent [7:3] (two differences very large). Between the three modalities, 9/10 vibrations achieved equivalence with at least one modality. For Duration, this is unsurprising. It is a physical property that is controllable through the Android vibration API, and both visualization methods explicitly present Duration as their *x*-axis. This information was apparently not lost in translation.

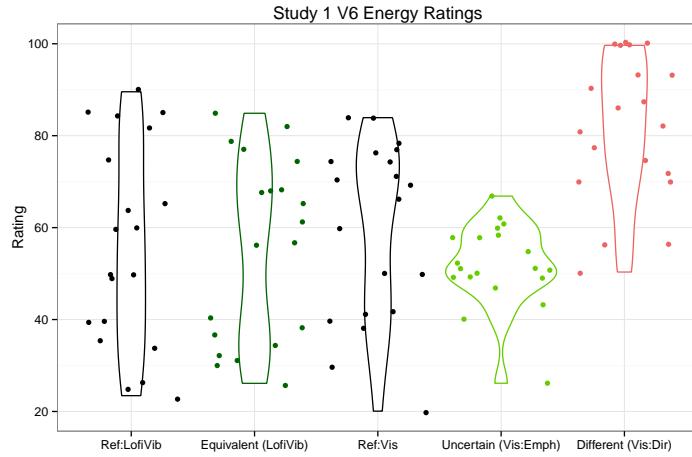

**Figure 6.9:** Rating distributions from Study 1, using V6 Energy as an example. These violin plots illustrate 1) the large variance in participant ratings, and 2) how equivalence thresholds reflect the data. When equivalent, proxy ratings are visibly similar to REF. When uncertain, ratings follow a distribution with unclear differences. When different, there is a clear shift.

More surprisingly, Pleasantness fared only slightly worse for LOFIVIB [4:2] and  $\text{VIS}_{\text{EMPH}}$  [4:1]; 8 / 10 vibrations had at least one modality that provided equivalence. Pleasantness is a higher-level affective feature than Duration. Although not an absolute victory, this result gives evidence that, with improvement, crowdsourcing may be a viable method of feedback for at least one affective parameter.

### Speed and Urgency translated better with LOFIVIB

LOFIVIB was effective at representing Urgency [6:2];  $\text{VIS}_{\text{EMPH}}$  attained only [4:5], and  $\text{VIS}_{\text{DIR}}$  [3:5]. Speed was less translatable. LOFIVIB did best at [4:2];  $\text{VIS}_{\text{DIR}}$  reached only [1:6], and  $\text{VIS}_{\text{EMPH}}$  [3:5]. However, the modalities again complemented each other. Of the three, 9/10 vibrations were equivalent at least once for Urgency (V8 was not). Speed had less coverage: 6/10 had equivalencies (V3,4,6,10 did not).

### **Roughness had mixed results; best with $\text{VIS}_{\text{EMPH}}$**

Roughness ratings varied heavily by vibration. 7 vibrations had at least one equivalence (V2,4,10 did not). All modalities had 4 equivalencies each:  $\text{VIS}_{\text{EMPH}}$  [4:3],  $\text{VIS}_{\text{DIR}}$  [4:4], and  $\text{LOFIVIB}$  [4:5].

### **Energy was most challenging**

Like Roughness, 7 vibrations had at least one equivalence between modalities (V1,4,10 did not).  $\text{LOFIVIB}$  [4:5] did best with Energy;  $\text{VIS}_{\text{EMPH}}$  and  $\text{VIS}_{\text{DIR}}$  struggled at [1:8].


### **Emphasized visualization outperformed direct plot**

Though it depended on the vibration,  $\text{VIS}_{\text{EMPH}}$  outperformed  $\text{VIS}_{\text{DIR}}$  for most metrics, having the same or better equivalencies/differences for Speed, Energy, Roughness, Urgency, and Pleasantness. Duration was the only mixed result, as  $\text{VIS}_{\text{DIR}}$  had both more equivalencies and more differences [7:3] versus [6:1]. In addition, 16/20 participants (80%) preferred  $\text{VIS}_{\text{EMPH}}$  to  $\text{VIS}_{\text{DIR}}$ . Although not always clear-cut, these comparisons overall indicate that our  $\text{VIS}_{\text{EMPH}}$  visualization method communicated these affective qualities more effectively than the status quo. This supports our approach to emphasized visualization, and motivates the future pursuit of other visualizations.

### **V4,V10 difficult, V9 easy to translate**

While most vibrations had at least one equivalence for 5 rating scales, V4 and V10 only had 3. V4 and V10 had no equivalences at all for Speed, Roughness, and Energy, making them some of the most difficult vibrations to translate. V4's visualization had very straight lines, perhaps downplaying its texture. V10 was by far the longest vibration, at 13.5s (next longest was V8 with 4.4s). Its length may have similarly masked textural features.

V8 was not found to be equivalent for Urgency and Pleasantness. V8 is an extremely irregular vibration, with a varied rhythm and amplitude, and the second longest. This may have made it difficult to glean more intentional qualities like Urgency and Pleasantness. However, it was only found to be different for

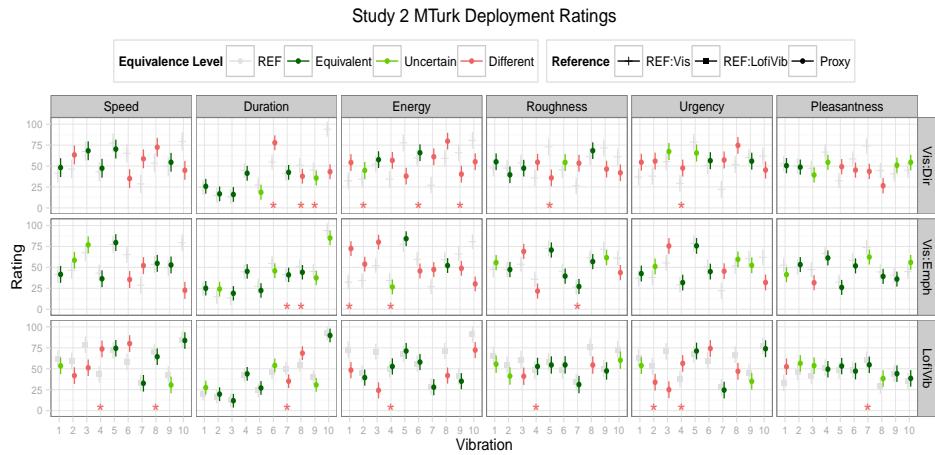

**Figure 6.10:** 95% Confidence Intervals and Equivalence Test Results for Study 2 - MTurk Deployment Validation. Equivalence is indicated with dark green, difference is indicated with red, and uncertainty with light green. Red star indicates statistically significant difference between remote and local proxy ratings.

$\text{VIS}_{\text{DIR}}$ /Urgency, so we cannot conclude that significant biases exist.

By contrast, V9 was the only vibration that had an equivalency for every rating scale, and in fact could be represented across all ratings with LOFIVIB. V9 was a set of distinct pulses, with no dynamic ramps; it thus may have been well suited to translation to LOFIVIB.

### Summary

In general, these results indicate promise, but also need improvement and combination of proxy modalities. Unsurprisingly, participant ratings varied, reducing confidence and increasing the width of confidence intervals (indeed, this is partial motivation to access larger samples). Even so, both differences and equivalencies were found in every rating/proxy modality pairing. Most vibrations were equivalent with at least one modality, suggesting that we might pick an appropriate proxy modality depending on the vibration; we discuss the idea of triangulation in more detail later. Duration and Pleasantness were fairly well represented, Urgency and Speed were captured best by LOFIVIB, and Roughness was mixed. Energy was

particularly difficult to represent with these modalities. We also find that results varied depending on vibration, meaning that more analysis into what makes vibrations easier or more difficult to represent could be helpful.

Though we were able to represent several features using proxy modalities within a bounded error rate, this alone does not mean they are crowdsource-friendly. All results from Study 1 were gathered in-lab, a more controlled environment than over MTurk. We thus ran a second study to validate our proxy modality ratings when deployed remotely.

## 6.7 Study 2: Deployment Validation with MTurk (G2)

To determine whether rating of a proxy is similar when gathered locally or remotely, we deployed the same computer-run proxy modality surveys on MTurk. We wanted to discover the challenges all through the pipeline for running a VT study on MTurk, including larger variations in phone actuators and experimental conditions (G4). We purposefully did not iterate on our proxy vibrations or survey, despite identifying many ways to improve them, to avoid creating a confound in comparing results of the two studies.

The visualization proxies were run as a single MTurk Human Intelligence Task (HIT), counterbalanced for order; the LOFIVIB survey was deployed as its own HIT. Each HIT was estimated at 30m, for which participants received \$2.25 USD. In comparison, Study 1 participants were estimated to take 1 hour and received \$10 CAD. We anticipated a discrepancy in average task time due to a lack of direct supervision for the MTurk participants, and expected this to lead to less accurate participant responses, prompting the lower payrate. On average, it took 7m for participants to complete the HIT while local study participants took 30m.

We initially accepted participants of any HIT approval rate to maximize recruitment in a short timeframe. Participants were post-screened to prevent participation in both studies. 49 participants were recruited. No post-screening was used for the visual sub-study. For the LOFIVIB proxy survey, we post-screened to verify device used [176]. We asked participants (a) confirm their study completion with an Android device via a survey question (b) detected actual device via FluidSurvey’s OS-check feature, and (c) rejected inconsistent samples (eg. 9 used non-Android

platforms for LOFIVIB). Of the included data, 20 participants participated each in the visual proxy condition (6F) and the LOFIVIB condition (9F).

For both studies, Study 1’s data was used as a “gold standard” that served as a baseline comparison with the more reliable local participant ratings [5]. We compared the remote proxy results (from MTurk) to the REF results gathered in Study 1, using the same analysis methods.

### 6.7.1 Results

Study 2 results appear in Figure 6.10, which compares remotely collected ratings with locally collected ratings for the respective reference (the same reference as for Figure 6.8). It can be read the same way, but adds information. Based an analysis of a different comparison, a red star indicates a statistically significant difference between remote proxy ratings and corresponding local *proxy* ratings. This analysis revealed that ratings for the same proxy gathered remotely and locally disagreed 21 times (stars) out of 180 rating/modality/vibration combination; i.e., relatively infrequently.

Overall, we found similar results and patterns in Study 2 as for Study 1. The two figures show similar up/down rating patterns; the occasional exceptions correspond to red-starred items. Specific results varied, possibly due to statistical noise and rating variance. We draw similar conclusions: that proxy modalities can still be viable when deployed on MTurk, but require further development to be reliable in some cases.

## 6.8 Discussion

Here we discuss high level implications from our findings and relate them to our study goals (G1-G4 in Introduction).

### 6.8.1 Proxy Modalities are Viable for Crowdsourcing (G1,G2: Feasibility)

Our studies showed that proxy modalities can represent affective qualities of vibrations within reasonably chosen error bounds, depending on the vibration. These results largely translate to deployment on MTurk. Together, these two steps indicate

that proxy modalities are be a viable approach to crowdsourcing VT sensations, and can reach a usable state with a bounded design iteration (as outlined in the following sections). This evidence also suggests that we may be able to deploy directly to MTurk for future validation. Our two-step validation was important as a first look at whether ratings shift dramatically; and we saw no indications of bias or overall shift between locally running proxy modalities and remotely deploying them.

### **6.8.2 Triangulation (G3: Promising Directions/Proxies)**

Most vibrations received equivalent ratings for most scales in at least one proxy modality. Using proxy modalities in tandem might help improve response accuracy. For example, V6 could be rendered with LOFIVIB for a pleasantness rating, then as  $\text{VIS}_{\text{EMPH}}$  for Urgency. Alternatively, we might develop an improved proxy vibration by combining modalities - a visualization with an accompanying low-fidelity vibration.

### **6.8.3 Animate Visualizations (G3: Promising Directions)**

Speed and Urgency were not as effectively transmitted with our visualizations as with our vibration. Nor was Duration well portrayed with  $\text{VIS}_{\text{DIR}}$ , which had a shorter time axis than the exaggerated  $\text{VIS}_{\text{EMPH}}$ . It may be more difficult for visual representations to portray time effectively: perhaps it is hard for users to distinguish Speed/Urgency, or the time axis is not at an effective granularity. Animations (e.g., adding a moving line to help indicate speed and urgency), might help to decouple these features. As with triangulation, this might also be accomplished through multimodal proxies which augment a visualization with a time-varying sense using sounds or vibration. Note, however, that Duration was more accurately portrayed by  $\text{VIS}_{\text{EMPH}}$ , suggesting that direct representation of physical features *can* be translated.

#### **6.8.4 Sound Could Represent Energy (G3: Promising Directions)**

Our high-fidelity reference is a voice-coil actuator, also used in audio applications. Indeed, in initial pilots we played vibration sound files through speakers. Sound is the closest to vibration in the literature, and a vibration signal's sound output is correlated with the vibration energy and sensation.

However, in our pilots, sometimes the vibration sound did not match the sensation; was not audible (low frequency vibrations); or the C2 could only play part of the sound (i.e, the sound was louder than the sensation).

Thus, while the raw sound files are not directly translatable, a sound proxy definitely has potential. It could, for example, supplement where the  $\text{VIS}_{\text{DIR}}$  waveform failed to perform well on any metric (aside from Duration) but a more expressive visual proxy ( $\text{VIS}_{\text{EMPH}}$ ) performed better.

#### **6.8.5 Device Dependency and Need for Energy Model for Vibrations (G4: Challenges)**

Energy did not translate well. This could be a linguistic confusion, but also a failure to translate this feature. For the visualization proxies, it may be a matter of finding the right representation, which we continue to work on.

However, with LOFIVIB, this represents a more fundamental tradeoff due to characteristics of phone actuators, which have less control over energy output than we do with a dedicated and more powerful C2 tacter. The highest vibration energy available in phones is lower than for the C2; this additional power obviously extends expressive range. Furthermore, vibration energy and time are coupled in phone actuators: the less time the actuator is on, the lower the vibration energy. As a result, it is difficult to have a very short pulses with very high energy (V1,V3,V8). The C2's voice coil technology does not have this duty-cycle derived coupling. Finally, the granularity of the energy dimension is coarser for phone actuators. This results in a tradeoff for designing (for example) a ramp sensation: if you aim for accurate timing, the resulting vibration would have a lower energy (V10). If you match the energy, the vibration will be longer.

Knowing these tradeoffs, designers and researchers can adjust their designs to obtain more accurate results on their intended metric. Perhaps multiple LOFIVIB

translations can be developed which maintain different qualities (one optimized on timing and rhythm, the other on energy). In both these cases, accurate models for rendering these features will be essential.

#### **6.8.6 VT Affective Ratings are Generally Noisy (G4: Challenges)**

Taken as a group, participants were not highly consistent among one another when rating these affective studies, whether local or remote. This is in line with previous work [240], and highlights a need to further develop rating scales for affective touch. Larger sample sizes, perhaps gathered through crowdsourcing, may help reduce or characterize this error. Alternatively, it gives support to the need to develop mechanisms for individual customization. If there are “types” of users who do share preferences and interpretations, crowdsourcing can help with this as well.

#### **6.8.7 Response & Data Quality for MTurk LOFIVIB Vibrations (G4: Challenges)**

When deploying vibrations over MTurk, 8/29 participants (approximately 31%) completed the survey using non-Android based OSes (Mac OS X, Windows 7,8,1, NT) despite these requirements being listed in the HIT and the survey. One participant reported not being able to feel the vibrations despite using an Android phone. This suggests that enforcing a remote survey to be taken on the phone is challenging, and that additional screens are needed to identify participants not on a particular platform. Future work might investigate additional diagnostic tools to ensure that vibrations are being generated, through programmatic screening of platforms, well-worded questions and instructions, and (possibly) ways of detecting vibrations actually being played, perhaps through the microphone or accelerometer).

#### **6.8.8 Automatic Translation (G4: Challenges)**

Our proxy vibrations were developed by hand, to focus on the feasibility of crowdsourcing. However, this additional effort poses a barrier for designers that might negate the benefits of using a platform of MTurk. As this approach becomes better defined, we anticipate automatic translation heuristics for proxy vibrations using validated algorithms. Although these might be challenging to develop for emo-

tional features, physical properties like amplitude, frequency, or measures of energy and roughness would be a suitable first step. Indeed, crowdsourcing itself could be used to create these algorithms, as several candidates could be developed, their proxy vibrations deployed on MTurk, and the most promising algorithms later validated in lab.

### 6.8.9 Limitations

A potential confound was introduced by  $\text{VIS}_{\text{EMPH}}$  having a longer time axis than  $\text{VIS}_{\text{DIR}}$ : some of  $\text{VIS}_{\text{EMPH}}$ 's improvements could be due to seeing temporal features in higher resolution. This is exacerbated by V10 being notably longer than the next longest vibration, V8 (13.5s vs. 4.4s), further reducing temporal resolution vibrations other than V10.

We presented ratings to participants by-vibration rather than by-rating. Because participants generated all ratings for a single vibration at the same time, it is possible there are correlations between the different metrics. We chose this arrangement because piloting suggested it was less cognitively demanding than presenting metrics separately for each vibration. Future work can help decide whether correlations exist between metrics, and whether these are an artifact of stimulus presentation or an underlying aspect of the touch aesthetic.

Despite MTurk's ability to recruit more participants, we used the same sample size of 40 across both studies. While our proxies seemed viable for remote deployment, there were many unknown factors in MTurk user behaviour at the time of deployment. We could not justify more effort without experiencing these factors firsthand. Thus, we decided to use a minimal sample size for the MTurk study that was statistically comparable to the local studies. In order to justify a larger remote sample size in the future, we believe it is best to iterate the rating scales and to test different sets of candidate modalities.

As discussed, we investigated two proxy modalities in this first examination but look forward to examining others (sound, text, or video) alone or in combination.

## **6.9 Conclusion**

In this paper, we crowdsourced high-level parameter feedback on VT sensations using a new method of *proxy vibrations*. We translated our initial set of high-fidelity vibrations, suitable for wearables or other haptic interactions, into two proxy modalities: a new VT visualization method, and low-fidelity vibrations on phones.

We established the most high-risk aspects of VT proxies, namely feasibility in conveying affective properties, and consistent local and remote deployment with two user studies. Finally, we highlighted promising directions and challenges of VT proxies, to guide future tactile crowdsourcing developments, targeted to empower VT designers with the benefits crowdsourcing brings.

## **6.10 Acknowledgments**

We are grateful for participant feedback, reviewer suggestions, and extra tactors shared by Hong Tan. Research was funded by NSERC and conducted under UBC BREB H13-01646.

## Chapter 7

# Breadth: Focused Design Projects

In Chapter 7, we complement the vibrotactile tools and techniques in Chapters 3-6, broadening our scope to include application areas like gaming and education, non-vibrotactile haptic devices, and other design concerns like customization. We adopt a haptic designer’s role to gain first-hand knowledge into HaXD in a more natural design setting than our one-session lab-based evaluations.

These focused design projects contributed to our inquiry by in three ways: individually informing our in-depth case studies with practical findings about implementation, implicitly enriching our final conclusions (Chapter 9) with reflection in our design process, and collectively suggesting concrete conclusions about the diversity of haptic experiences (Section 9.2.2) and conceptually framing haptic designs (Section 9.2.3).

We include five design projects:

**7.1 FeelCraft: Sharing Customized Effects for Games**<sup>12</sup>, a plug-in architecture for distributing customizable feel effects, implemented with the game Minecraft. **FeelCraft informed how designed sensations from Tactile Animation (Chapter 4)** could feel when put in context.

---

<sup>1</sup>Schneider, Zhao, and Israr. (2015) *FeelCraft: User-Crafted Tactile Content*. Lecture Notes in Electrical Engineering 277: Haptic Interaction.

<sup>2</sup>Zhao, Schneider, Klatzky, Lehman, and Israr. (2014) *FeelCraft: Crafting Tactile Experiences for Media using a Feel Effect Library*. UIST ’14 Demos.

**7.2 Feel Messenger: Expressive Effects with Commodity Systems**<sup>34</sup>, a design project creating expressive shareable VT icons on commodity smart phones. With Feel Messenger, we pushed the limits of existing hardware to create engaging vibrotactile feedback, and understood how to create effective phone vibrations for HapTurk (Chapter 6).

**7.3 RoughSketch: Designing for an Alternative Modality**, a drawing application using programmable friction with the TPad phone. With RoughSketch, we learned how to work with tactile sensations for active touch; friction feedback requires users to move their fingers.

**7.4 HandsOn: Designing Force-Feedback for Education**<sup>5</sup>, a conceptual model for DIY force-feedback haptics in education. By designing active-learning lessons, we worked towards a concrete goal within diverse constraints: multiple stakeholders (teachers, students), low-cost device capabilities, and how to fit haptics into a lesson plan.

**7.5 CuddleBit Design Tools: Sketching and Refining Affective Robot Behaviours**<sup>6</sup>, Voodle and MacaronBit are design tools for CuddleBits, simple affective robots. Voodle and MacaronBit were developed to explore explicitly supporting *sketching* and *refining* supported in a suite of tools.

Most of this chapter (Sections 7.1-7.3 and 7.5) were primarily presented as demos with associated papers. As such, we present this chapter's work in a summary format rather than full reproduction, and exclude prefaces.

---

<sup>3</sup>Israr, Zhao, and Schneider. (2015) *Exploring Embedded Haptics for Social Networking and Interactions*. CHI EA '15.

<sup>4</sup>Schneider, Zhao, and Israr. (2015) *Feel Messenger: Embedded Haptics for Social Networking*. World Haptics '15 Demos.

<sup>5</sup>Minaker, Schneider, Davis, and MacLean. (2016) *HandsOn: Enabling Embodied, Creative STEM e-learning with Programming-Free Force Feedback*. Haptics: Perception, Devices, Control, and Applications: 10th International Conference, EuroHaptics 2016, London, UK, July 4-7, 2016, Proceedings, Part II.

<sup>6</sup>Bucci, Cang, Chun, Marino, Schneider, Seifi, and MacLean. (2016) *CuddleBits: an iterative prototyping platform for complex haptic display*. EuroHaptics '16 Demos.

## 7.1 FeelCraft: Sharing Customized Effects for Games


As shown in prior work [238, 239], and as we will discuss in Chapter 8, customization is an important feature for haptic experiences. In addition, haptic media must be built around existing infrastructure, as it is not directly supported by most media types. FeelCraft is a media plugin architecture that monitors events and activities in the media, and associates them to user-defined haptic content in a seamless, structured way. The FeelCraft plugin allows novice users to generate, recall, save, and share haptic content, and play and broadcast them to other users to feel the same haptic experience, without requiring any skill in haptic content generation. In this chapter, we describe the plug-in architecture, envisioned applications, and our implementation for VT grid arrays displaying Feel Effects (FEs) [128] for a popular video game, Minecraft. Our implementations uses the Marvel Avengers Vybe Haptic Gaming Pad by Comfort Research (<http://comfortresearch.com>), a chair-shaped pad with 12 actuators (6 voice coils and 6 rumble motors). We designed effects that leveraged this display, *e.g.*, voice coils simulating rain on the user’s back when there is rain in-game, and rumble motors creating a galloping sensation on the chair’s seat when the user rides an virtual horse.

### 7.1.1 FeelCraft Plugin and Architecture

A FeelCraft plugin maps media to haptic sensations in a modular fashion, supporting arbitrary media types and output devices. By using a FeelCraft plugin, users can link existing and new media to the haptic feedback technology, use an FE library to find appropriate semantically defined effects, author, customize, and share a common, evolving repository of FEs, and play and broadcast haptic experiences to one or more user(s). A pictorial description of the FeelCraft architecture is shown in Fig. 1 architecture.

The conceptual framework of FeelCraft revolves around the FE library introduced in [128]. The FE library provides a structured and semantically correct association of media events with haptic feedback. By using the authoring interface to tailor FE parameters, a repository of FEs can remain general while being used for unique, engaging, and suitable sensations for different media. The playback system, authoring and control interface, Event2Haptic mappings, and media plugin

support seamless flow of the media content to the haptic feedback hardware.

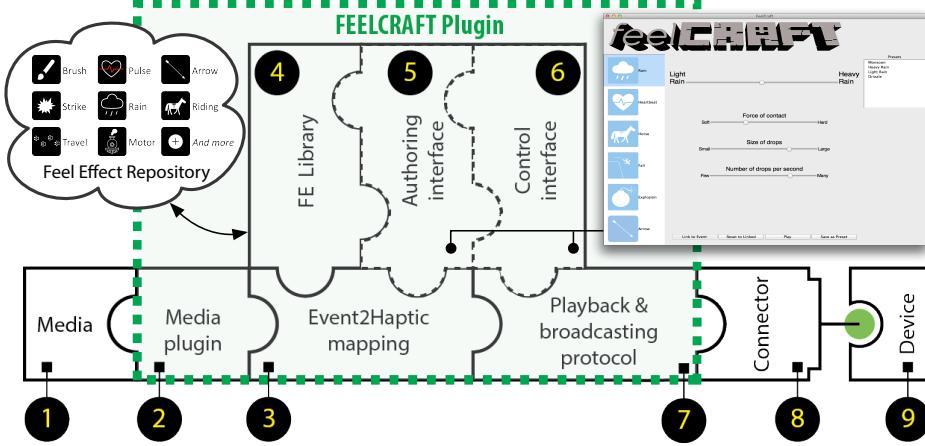

**Figure 7.1:** FeelCraft architecture. The FeelCraft plugin is highlighted in green. The FE library can connect to shared feel effect repositories to download or upload new FEs. A screenshot of our combined authoring and control interface is on the right.

**Media (1)** can be entertaining, such as video games, movies, and music, or social and educational. The media can also be general user activity or embedded events in applications. In our implementation (Figure 7.3), we use the popular sandbox indie game Minecraft (<https://minecraft.net>).

**Media Plugin (2)** is a software plugin that communicates with the media and outputs events and activities. This plugin can be as simple as receiving messages from the media or as complicated as extracting events and activities from a sound stream. With existing media, common plugin systems are automatic capture of semantic content from video frames [189], camera angles [63], or sounds [40, 156], or the interception of input devices (such as game controllers or keyboard events). We use a CraftBukkit Minecraft server modification to capture in-game events.


**Event2Haptic (3)** mappings associate events to FEs, which are designed, tuned, and approved by users using the FE library. This critical component links the media plugin's output to the haptic playback system. Currently, six FEs are

triggered by six recurring in-game events: the presence of rain, low player health, movement on horse, strike from a projectile, in-game explosions, and player falls. Our implementation provides the option to store this mapping directly in the source code, or in a text-based JavaScript Object Notation (JSON) file

**FE Library (4)** is a collection of FEs. A key feature of an FE is that it correlates the semantic interpretation of an event with the parametric composition of the sensation in terms of physical variables, such as intensity, duration, and temporal onsets [128]. Each FE is associated with a family, and semantically, similar FEs are associated with the same family. For example, the Rain family contains FEs of light rain and heavy rain; as well that of sprinkle, drizzle, downpour, and rain. In our implementation, each FE family is represented as a Python source file that defines parametric composition of the FE and playback sequences for the FeelCraft Playback system, and each FE is coded as preset parameters in a JSON file. FE family files are necessary to play corresponding FEs in the family, and new FE families can be developed or downloaded through the shared FE repository. The FE can also be created, stored, and shared. FE family and FE files are stored in a local directory of the plugin and loaded into FeelCraft on startup.


**Authoring and Control Interfaces (5, 6)** allow users to create and save new FEs and tune, edit, and play back existing FEs. Users modify an FE by varying sliders labeled as common language phrases instead of parameters such as duration and intensity (Fig. 1). Therefore, users can design and alter FEs by only using the semantic logic defining the event. The interface also allows users to map game events to new FEs and broadcast to other users, supporting a What-You-Feel- Is-What-I-Feel (WYFIWIF) interface [228].

**Playback and Communication Protocols (7)** render FEs using the structure defined in FE family files and outputs them through a communication method (8) to one or more devices (9). Our implementation includes an API controlling the commercially available Vybe Haptic Gaming Pad via USB.

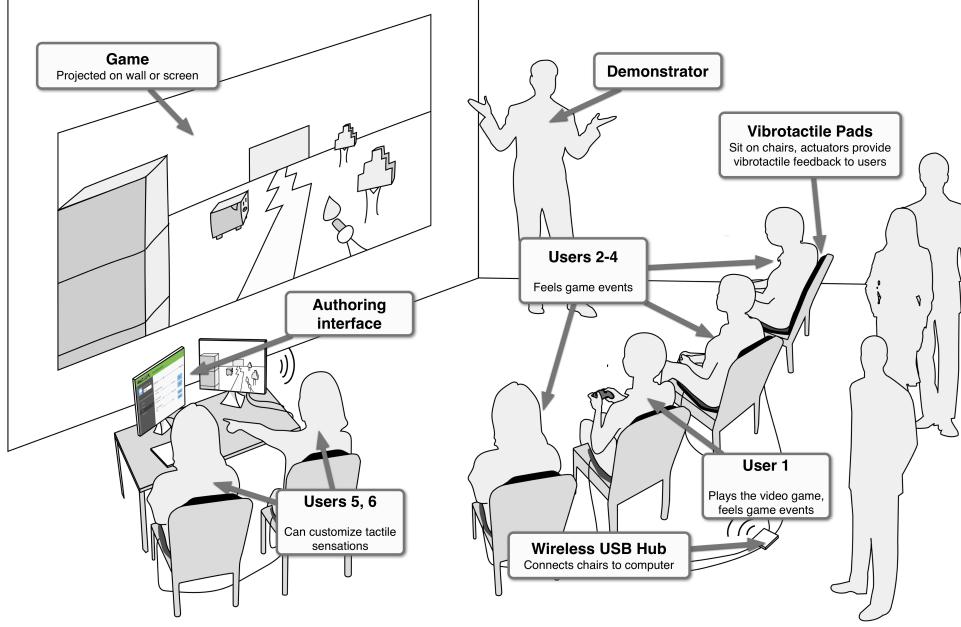

**Figure 7.2:** Mockup for FeelCraft demo system.


### 7.1.2 Application Ecosystem

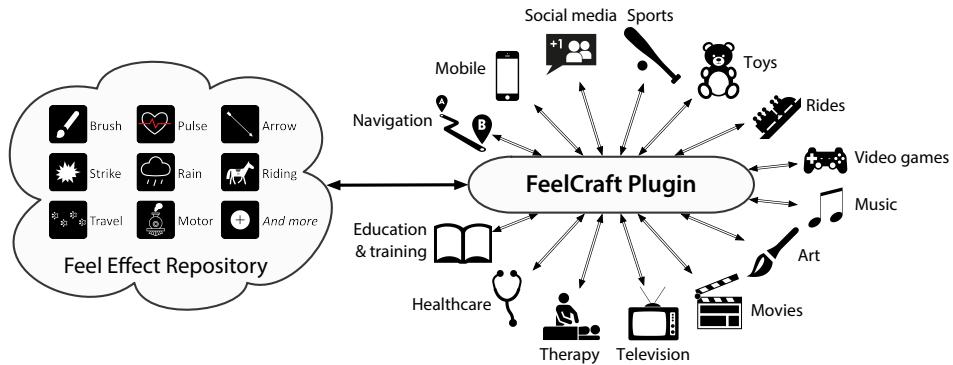

**Figure 7.3:** Application ecosystem for FeelCraft and an FE repository

FeelCraft plugins are designed to make haptics accessible to end users using existing media and technology. For example, a user may want to assign a custom vibration to a friend's phone number, or add haptics to a game. In this case, a user would download a FeelCraft plugin for their device, browse FEs on an online feel

repository, and download FE families they prefer. Once downloaded, the FeelCraft authoring interface allows for customization, as a rain FE for one video game may not quite suit another game. The user could create a new FE for their specific application, and once they were happy with it, upload their custom FE for others to use. If the user wanted to show a friend their FE, they could use the playback system to drive output to multiple devices, or export the FE to a file and send it to them later. Figure 2 illustrates this ecosystem with application areas. Just like the Noun Project for visual icons (<http://thenounproject.com>) and downloadable sound effect libraries, we envision online repositories of FEs that can be continually expanded with new FEs by users. Our current FERepository includes six original families described in [128] and an additional four new families: Ride, Explosion, Fall, and Arrow.

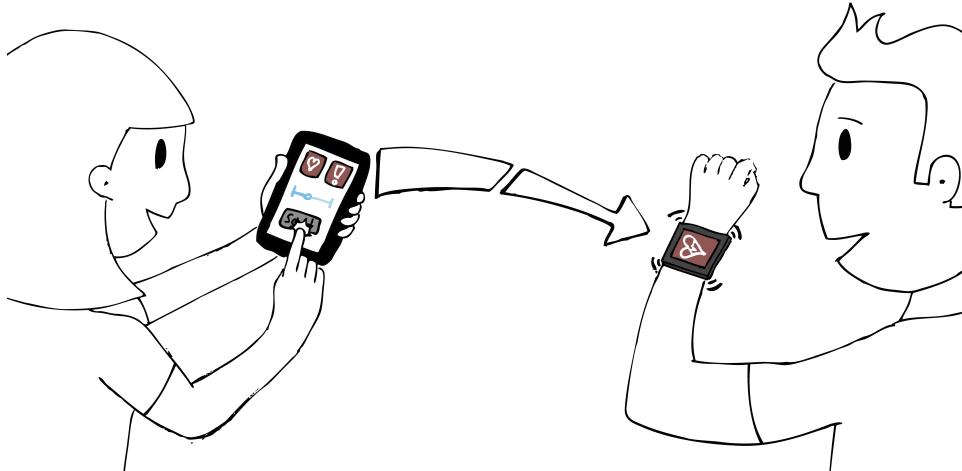

**Figure 7.4:** Users exchanging expressive haptic messages on consumer embedded devices.

## 7.2 Feel Messenger: Expressive Effects with Commodity Systems

In Section 7.1, we designed expressive spatial VT Feel Effects using existing infrastructure, using a plugin architecture to link desktop applications to new VT hardware. In Section 7.2, we look at the expressiveness of existing infrastructure

and actuation methods with Android smartphones for customizable VT effects by implementing customizable VT emojis in a chat program, Feel Messenger. As illustrated previously by Figure 6.6 in Chapter 6, APIs for vibrotactile feedback are currently limited to a series of pulses. With Feel Messenger, we were able to produce expressive VT icons for emojis using the built-in Android API, including customizable effects like a heartbeat that varies in both rate and intensity. We found VT icons were effective when they had an engaging visual icon to frame the vibration, *e.g.*, a cat emoji helped the user understand purring vibration was a purr. Figure 7.4 presents a concept sketch.

### 7.2.1 Feel Messenger Application

In this section, we present the architecture (backend) and user interface (frontend) of a messenger application that allows users to create and share haptic content through a network connection. The critical components of the application are shown in Figure 2.

**Architecture** – To account for the limited computation, storage and communication capabilities of a simple microcontroller unit, we introduce feelbits and feelgits. Feelgits (short from “feel widgets”) are installed piece of software that define parametric compositions of a set of haptic patterns (called a family). Feelbits are parametric settings of a feelgit to produce a particular haptic pattern (called a feel effect [128]). For example, the feelgit of pulse is defined as two successive onsets of vibration, separated by a timing parameter. The feelbits are timing and intensity of onset parameters. Therefore, by varying feelbits, a user can personalize the haptic effect to be calm (low intensity, long temporal separation) or racing (high intensity, short temporal separation) heartbeat.

A library of haptic patterns is stored as parametric models (feelgits) with preset parameters (feelbits). New feelgits and feelbits can be downloaded, personalized and saved. The haptic engine idly waits for incoming haptic messages and renders haptic patterns on demand. Once the message is received, the corresponding feelgit is executed with parameters defined as feelbits. Once the pattern is completely rendered, the engine waits idly for the next message.

Additionally, the response characteristics of the VT motor are also stored in

the memory. These characteristics are generally represented by simple first-order functions relating the digital value (such as data byte) to the perceived intensity judged by users [136], which could be used to maintain the quality of experience across wide variety of mobile phones and hardware technologies.

Finally, we introduce a communication protocol that shares feelgits and feelbits along with text messages. For example, the frontend application sends a function `playpattern("pulse", p1, p2)` to play the feelgit pulse with parameters defined as feelbits p1 and p2; or `playpulse("soft")` plays a predefine soft pulse. Note that in order for the device to play a haptic pattern, the corresponding feelgit must be stored in the device; the communication packet includes feelbits and the name or id of the corresponding feelgit.

***Predefined Patterns*** – The predefined patterns allow users to quickly attach a haptic pattern to the IM. These patterns can be stored from incoming messages or created by using stored haptic families. Each pattern is defined by a set of feelbits that plays when the corresponding feelgit is executed. These presets can be shown as text, images or emotion icons.


***Authoring interface*** – The Feel Editor displays available FE families (feelgits) and allows users to personalize, play, save and share haptic patterns. By clicking a FE icon, sliders corresponding to parameters (feelbits) are enabled. These sliders may have labels corresponding to physical parameters, such as amplitude or duration of vibration; however, we have used semantic labeling that may correspond to single or multiple parameters. Once the sliders are adjusted, the user can play, save or attach the haptic pattern to the IM.

### 7.2.2 Haptic Vocabulary


The vocabulary of haptic effect is critical for expressive and precise communication between users. In this preliminary implementation, we explore three types of haptic vocabularies. Type 1 is adapted from feel effects defined in [128], where haptic patterns are semantically characterize by a phrase. Type 2 is change in physical parameters as in [20, 166] but can also be simultaneously played with feel effects. Type 3 predefined coded patterns. Figure 7.5 shows the icons for haptic language. Note, that the two feel effects cannot be simultaneously played. This will result in

overflow of the user's bandwidth, especially with a low-fidelity VT actuator.

i. Feel Effects



ii. Physical Effects



iii. Symbolic Effects



**Figure 7.5:** Graphical representation of haptic vocabularies and icons.


**Type 1: Feel Effects** – A set of feel effects is defined that delivers emotional, attentional and contextual effects. They are:

**Pulse:** Two successive onsets of vibration; speed (slow/fast) and intensity (weak/strong).  
Used as pulsation and heartbeat (calm/racing).

**Motor:** A 4-second modulated vibration; intensity (soft/loud) and speed (slow-/fast) are parameters. Used as snoring, breathing, purring, engine rumble, etc.

**Strike:** A single onset of vibration; duration (short/long) and intensity of vibration are parameters. Used for tap, poke, jab and punch.

**Urgency:** a burst of vibrations; intensity (weak/strong) and temporal separation between pulses (low/high urgency) are parameters. Used for alerting users and expressing urgency.

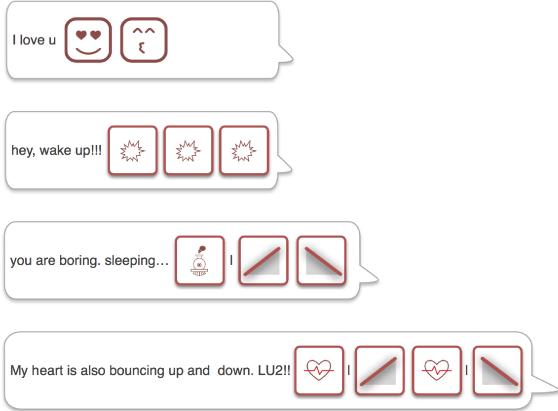

**Figure 7.6:** Some examples of expressive haptic messages embedded with normal text messages.

**Type 2: Physical Effects** – These effects are associated with direct variation in tactile patterns. Previous studies (*e.g.*, [20, 166]) have used variation in amplitude, duration as typical variation. Our library includes:


**Ramp-up:** gradual increase in intensity; parameters are peak intensity and the rate of increase.

**Ramp-down:** gradual decrease in intensity; parameters are peak intensity and the rate of decrease.

**Spacer:** keeps steady intensity; parameters are intensity and duration. This can be used for putting a delay (or spaces) between two haptic effects.

These effects create new haptic effects and can also be combined with feel effects. Such as the message Ramp-up — Motor followed by Ramp-down creates a new pattern that gradually increases the rumbling and then decays linearly as shown in Figure 7.6.

**Type 3: Coded Effects** – This type demonstrates symbolic vocabularies, such as one adapted from International Morse Code that consists of pre-stored pulses of dots and dashes. Other examples can be vibratese language [262], emoticon, and input from peripheral sensors.

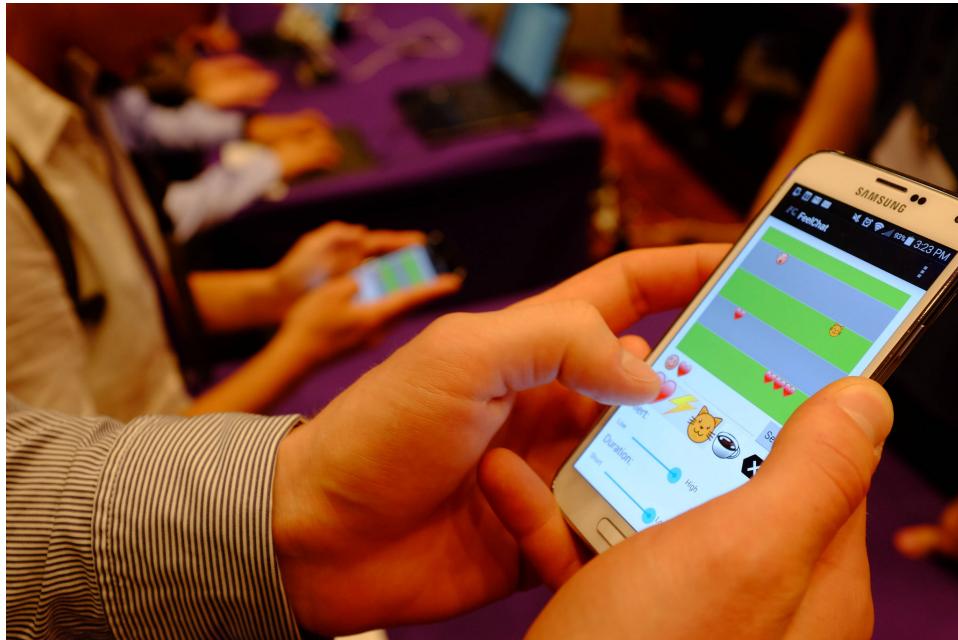

**Figure 7.7:** Implemented Feel Messenger demo at World Haptics 2015.

### 7.2.3 Demo

We developed an Android application on two Samsung S5 smartphones running Android 4.4.2. The Android API allows ON/OFF control of the embedded VT motor. A rough relationship between duty cycle and perceived intensity was determined to create effects.

In this prototype, we explored both predefined effects and Type 1 icons (Feel Effects). Our predefined effects were designed with 6 emoji. Our four Type 1 FEs were: Heartbeat (Pulse FE), Lightning (Strike FE), Cat Purr (Motor FE), and Coffee (Urgency FE). These VT emoji could be embedded in chat messages, sent between two Android phones using UDP. VT effects are felt when editing, when received, and when the user taps a message. All effects were implemented using built-in Android APIs.

### 7.3 RoughSketch: Designing for an Alternative Modality

FeelCraft (Section 7.1) and Feel Messenger (Section 7.2) used existing infrastructure to conduct VT design, but how do other types of feedback vary? In Sections 7.3 to 7.5, we investigate other modalities in other applications: programmable friction for touchscreen drawing, force-feedback for education, and affective robots for emotional expression. Here, in Section 7.3, we describe RoughSketch, a drawing application for the TPad Phone.

The TPad Phone ([www.thetpadphone.com](http://www.thetpadphone.com)) is a programmable friction display mounted on an Android phone. It uses piezo-actuated mechanical vibration to create a cushion of air, reducing friction [276]. As part of the World Haptics 2015 Student Innovation Challenge, we built RoughSketch, a mobile drawing application to explore friction displays for digital mark-making. We looked at several mark-making interaction techniques including:

- *Paintbrush*, where you feel paint leaving your finger,
- *Pen and eraser*, based on real-world writing utensils,
- *Spray paint*, where you feel the roughness of paint on the screen as you spray,
- *Pinch/zoom*, inspired by compressing and stretching rubber, and
- *Feel finger*, the ability to feel your drawing on the paper.

To implement RoughSketch, we adapted an open-source Android drawing application, Markers (<https://github.com/dsandler/markers>) and used the TPad Phone API to control friction using two methods: static textures defined by bitmaps, and temporal envelopes that programmatically adapt friction based on input values or time. We used a variety of real-world metaphors to inspire our designs; these are illustrated in Figure 7.8. While designing and developing RoughSketch, we exposed a design space, finding conflicts for our metaphors, specifically, should TPad sensations feel like their real-world equivalent, or are they unique to the TPad; and should rendered textures represent the drawing process, or the finished product?

Our findings are outlined in Figure 7.9. In addition to developing different effects, we informally compared haptic feedback to non haptic feedback by including

The RoughSketch handout is a grid-based chart comparing six different interaction techniques and their resulting textures. The columns represent the tools: Eraser, Pen, Airbrush, Pan/Zoom, Touchfinger, and Paint. The rows provide detailed information about each tool's behavior and its visual representation.

TOOL	ERASER	PEN	AIRBRUSH	PAN/ZOOM	TOUCHFINGER	PAINT
INSPIRATION						
TEXTURE						
×						
=						
DESCRIPTION	The eraser mimics real life, like bits rubbing off as you use it.	The pen texture is constant but slightly grainy, as if it's rolling across paper.	The airbrush feels like the mark it is making.	The zoom tool uses a 'pinching rubber' metaphor; pan is like moving a page.	The touchfinger renders the current canvas image as a friction map.	The paintbrush starts slippery and gains texture as you 'lose' paint.

**Figure 7.8:** RoughSketch handout, illustrating interaction techniques and textures.

a toggle to friction feedback. Although some effects were subtle, once disabled, users immediately noticed the difference and preferred to have haptic feedback. We also explored stylus use, finding that a rubber tip would barely transmit any sensation, while a more rigid tip would propagate the (dampened) effect.

## 7.4 HandsOn: Designing Force-Feedback for Education

In Section 7.4, we investigate creative control of 1-degree of freedom (DOF) force-feedback display for education. Force-feedback is interactive, with output dependent on input, but also controllable when the user holds their hand stationary, unlike programmable friction feedback explored in Section 7.3. The application area, science education, offers important design constraints: feedback must enhance learning without distraction, and in this project, enable creative exploration for students.



# RoughSketch

Putting the feeling into drawing on a phone



Paul Bucci, Brenna Li, Gordon Minaker, Oliver Schneider, supervised by Karon MacLean  
The University of British Columbia

**Introduction**

You're an artist painting on a canvas—you can feel the stroke of the brush, the texture changing as the paint fades. This feedback guides your stroke, giving you immediate, precise control.

It's difficult to replicate this experience on a touchscreen device. We used the TPad Phone's variable friction display to enhance these experiences on a touchscreen for digital artists, writers, notetakers, and painters alike. We've explored what mark-making tools should feel like through the lens of a drawing application: Roughsketch.

**Should the feeling reflect real life, or be unique to the TPad?**

Many of our tools were inspired by reality, but realism isn't always possible. For example, the pen tool reflects the feeling of writing on paper, but we couldn't identify a tangible 'pan/zoom' tool in real life.

**Should feeling represent the drawing process, or the product?**

Some tools felt right when we captured the experience of making the mark: while painting, friction increases as your brush deposits paint, which we can directly represent. Others felt right when you felt the mark you made: the airbrush's character is in its paint splatter, represented by a bumpy, grainy texture.

**Possible Applications**

Annotating      Painting      Writing      Drawing

The zoom tool uses a 'pinching rubber' metaphor; pan is like moving a page.


The eraser mimics real life, little bits rubbing off as you use it.

The pen texture is constant but slightly grainy, as if rolling across paper.

The paintbrush starts slippery and gains texture as you 'lose paint'.

The airbrush feels like the mark it is making.

**Figure 7.9:** RoughSketch poster, describing interaction techniques and high-level findings.

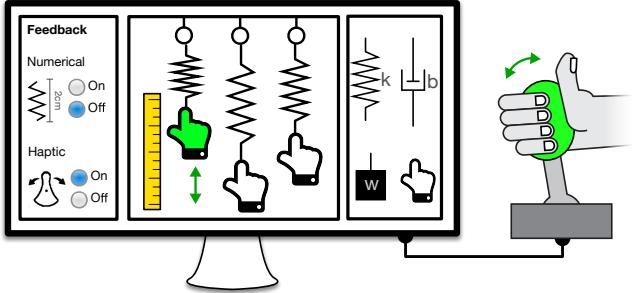

**Figure 7.10:** Students, teachers, and researchers can explore science, technology, engineering, and math (STEM) abstractions through low-fidelity haptics, incorporating elements into system designs.

We thus both design haptic feedback and enable students to design while they learn. To manage this, we model feedback as a system of springs, easy to adjust and design, but scalable to more complex tasks by combining multiple springs in series or parallel.

#### 7.4.1 Introduction

Recognition of the value of a hands-on, embodied approach to learning dates to 1907, when Maria Montessori opened a school where she used *manipulatives* to teach a wide array of concepts ranging from mathematics to reading, e.g., by introducing the alphabet through children tracing their finger along large, cut-out letters [184]. Constructivist learning theories posit that well-designed manipulatives can assist understanding by grounding abstract concepts in concrete representations [200, 203], and are an accepted core principle in early math and science education, confirmed empirically [34]. More recently, digital technologies are radically altering learning environments. Massive Open Online Courses (MOOCs) expand access, games motivate, and with graphical simulations (e.g., PhET [273]), students can interact with abstractions to develop their understanding. However, these experiences are disembodied. Indirect contact via keyboard, mouse and screen introduces a barrier of abstraction that undermines the connection and path to understanding.

Haptic (touch-based) technology should bring benefits of physicality and em-

bodied learning [66] to interactive virtual environments. It adds a sensory channel as another route to understanding [31]; when deployed appropriately, active exploration can improve understanding [175] and memory [95] of new concepts. Haptic tools have already shown promising results in many specializations, demographics and age groups, both to enhance lesson fidelity and to increase engagement and motivation through tangibility and interactivity; e.g., with devices like Geomagic Touch<sup>7</sup> [274] and SPIDAR-G [222].

Unfortunately, existing approaches have both hardware and software limitations. Actuated learning tools introduce physical issues of cost, storage, and breakage; devices are too bulky, complex, or expensive for schools or self-learners. For software, it is hard for users to construct and explore their own haptic environments. Typically, users load a virtual system to interact with it haptically. This sidelines the rich learning potential of involving users with model construction [200]. We address hardware with the HapKit [198], a \$50, simple, low-fidelity device constructed from 3d printed materials.

Our focus here is on software, with a new learning environment that lets users both construct and explore haptic systems. Until now, the only way for a user to construct a haptic system was by programming it herself. Our approach, inspired by Logo [200] and Scratch [173], is to ultimately provide much of the power of a programming language while hiding distracting complexity.

### **Approach and Present Objectives:**

To study *how* to unlock the potential of hapticized virtual environments in STEM education, we need a viable front-end. To this end, we first established a *conceptual model (HandsOn)*: central interface concepts, supported operations and language [133] that can be employed in a broad range of lessons involving physical exploration and design.

Next, we implemented the *HandsOn* conceptual model (CM) in *SpringSim*, a first-generation learning interface prototype narrowly focused in a module on mechanical springs and targeted at high school physics students. To render forces we used the HapKit, a simple device with a 3D-printable handle providing affordable,

---

<sup>7</sup>Prev. Sensable Phantom [www.geomagic.com/en/products/phantom-omni/overview](http://www.geomagic.com/en/products/phantom-omni/overview)

self-assembled 1 DOF force-feedback for about \$50 USD. As an evaluation instrument, this single-lesson implementation allows us to (a) measure a given hardware platform’s fidelity for a representative perceptual task; (b) attain insight into the kinds of lessons such a system can leverage; and (c) assess its learning-outcome efficacy relative to conventional methods. With these answers, we will be able to design a more powerful tool.

We report results from two user studies: (1) the HapKit’s ability to display differentiable springs with and without graphical reinforcement, and (2) a qualitative evaluation of *SpringSim* for a carefully designed set of educational tasks. We confirm that the *SpringSim* interface and its conceptual model *HandsOn* are understandable and usable, describe the role of haptics compared to mouse input, and provide recommendations for future evaluation, lesson and tool design.

#### 7.4.2 Tool Development: Conceptual Model and Interface

Our goal was to find a software model to use and evaluate low-cost force feedback in an educational setting. We began by choosing a device, establishing requirements, and exploring capabilities through use cases and prototypes. From this, we defined *HandsOn*. We then implemented essential features in a medium-fidelity prototype, *SpringSim*, for our user studies.

##### Initial design (requirements):


We established six guiding requirements. First, we developed initial prototypes with HapKit 2.0 through two pilot studies with middle school students (described in [198]). These highlighted two aspects of a practical, accessible approach for junior students: 1) no programming; instead 2) a graphical implementation of an exploratory interface within a lesson plan. We also needed to build on known benefits of traditional classroom practices, and enable learning-outcome comparison. We must 3) support the same *types* of traditional education tasks, e.g., let students compare and assemble spring networks as easily as in a hands-on physics lab; but also 4) *extend* them, to leverage the flexibility offered by a manipulative that is also virtual. Similarly, to support future formal comparisons, our model needs to 5) support both haptic and non-haptic (mouse) inputs. Finally, to ensure general-

ity we also needed to 6) support diverse STEM topics, like physics, biology, and mathematics. Further design yielded a model that addressed these requirements: *HandsOn*.


### Conceptual Model:

*HandsOn* is a programming-free (R1) graphical interface supporting learner exploration (R2), with a number of key concepts: *Interactive Playground*, *Hands*, *Design Palette*, *Objects*, *Properties*, *Haptic* and *Visual Controls*. Exploration is supported at various levels (Figure 7.11).

The *Interactive Playground* provides a virtual sandbox where users can interact with virtual environments (VE). *Hands* allow users to select, move, and manipulate components in the Interactive Playground. Control occurs with either the mouse or a haptic device to receive force-feedback (Figure 7.11A) (R5). In the design and modification phase, users can add or remove *objects* like springs, masses, gears, or electrons by dragging them to and from a *Design Palette* (R3). Once added to the scene, users can modify their physical properties (e.g., a spring constant  $k$ ) and make changes to the VE (Figure 7.11B). After construction, the user can customize their interaction with their VE by adjusting *Visual Controls* and *Haptic Controls* options that extend interactions in new ways afforded by haptics (R4) (Figure 7.11C). Because of the flexibility afforded by having multiple *objects* in the playground with multiple *Hands* for interaction points, and customization of interaction and feedback, *HandsOn* can support different STEM topics (R6), from biology to mathematics. To confirm the viability of this approach, we built an

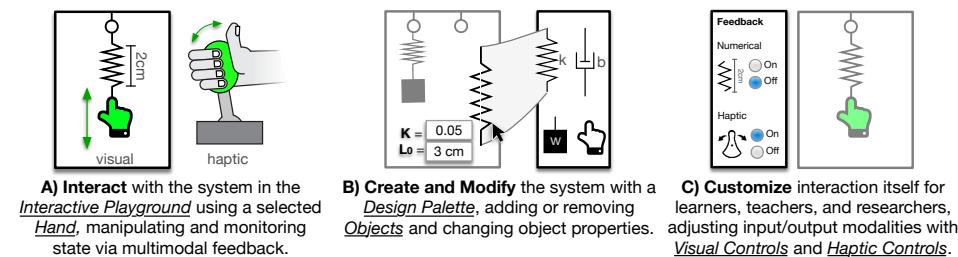

**Figure 7.11:** The *HandsOn* CM enables three kinds of exploration based on requirements.

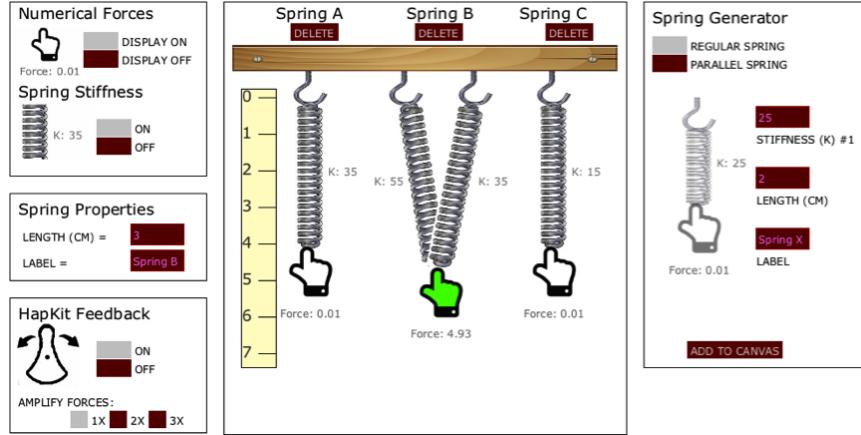

**Figure 7.12:** *SpringSim* interface, a *HandsOn* sandbox for a single lesson module on springs.

initial prototype with essential features: *SpringSim*.

#### Implemented Prototype:

Our first *HandsOn* interface is *SpringSim* (Figure 7.12), which supports a spring lesson – spring systems are natural as a virtual environment of easily-controlled complexity. In *SpringSim*, objects include single springs and parallel spring systems, with properties spring rest length (cm), stiffness (N/m) and label. The *Design Palette* includes the *Spring Properties* and *Spring Generator* UI components. Implemented *Visual Controls* are toggling numerical displays of spring stiffness and force; *Haptic Controls* toggle HapKit feedback and output amplification. The open-source repository for SpringSim is available at <https://github.com/gminaker/SpringSim>.

#### 7.4.3 Study 1: Perceptual Transparency

Before evaluating *SpringSim*, we needed to confirm that the HapKit could render spring values sufficiently for our qualitative analysis.

### **Methods:**

14 non-STEM undergraduate students (8 females) participated in a two-alternative, forced choice test with two counterbalanced within-subject conditions: *HapKit + Dynamic Graphics*, and *HapKit + Static Graphics* (Figure 7.13). Three spring pairs (15/35, 35/55 and 55/75 N/m) were each presented five times per condition, in random order. For each pair, participants indicated which spring felt more stiff, and rated task difficulty on a 20-point scale. Following each condition, participants rated overall condition difficulty, mental demand, effort, and frustration on 20-point scales derived from the NASA TLX [105]. Following the completion of both conditions, a semi-structured interview was conducted to address any critical incidents. Each session lasted 20-30 minutes.

### **Results:**

All tests used a 5% level of significance and passed test assumptions.


*Accuracy:* A logistical regression model was trained on task accuracy with spring-pair and condition as factors. No interaction was detected; spring-pair was the only significant factor. Post-hoc analysis revealed that spring-pair #1 (15/35 N/m) was significantly less accurate than spring-pair #2 (35/55;  $p=0.0467$ ). Performance averaged 88.57% (15/35), 96.49% (35/55), and 94.45% (55/75).

*Time:* Task time ranged from 3-160s (median 117s, mean 96.41s, sd 47.57s). In a 3-way ANOVA (participant, spring-pair, and visualization condition) only participant was significant ( $F(13, 336) = 4.17 p = 1.947e - 06$ ).

*Difficulty rating:* A 3-way ANOVA (factors: participant, spring-pair, and visualization condition) detected one two-way interaction between participant and spring pair ( $F(26, 336) = 2.10, p = 0.00165$ ).

### **Discussion:**

Study 1 revealed that (a) for stiffness intervals 15/35/55/75 N/m, the HapKit provides distinguishability equivalent to dynamic graphics. Individual differences

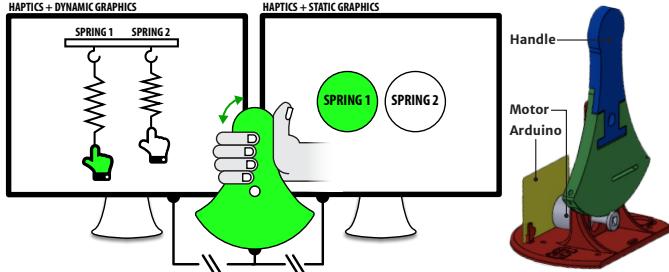

**Figure 7.13:** In the *Hapkit+Dynamic Graphics* condition, graphical springs responded to input (left); static images were rendered in the *Hapkit+Static Graphics* condition (right); in both, HapKit 3.0 [198] was used as an input/force-feedback device (far right).

influenced difficulty and speed, suggesting that learning interfaces may need to accommodate this variability. (b) Accuracy was not dependent on individual differences, suggesting that learning interfaces can consider task time and perceived difficulty separately from accuracy when using the HapKit (at least, for these force ranges). (c) Performance was mostly above 90%, and confidence intervals for our small sample size estimate no lower than 82% accuracy at the lowest (15/35). We speculate that the HapKit’s natural dynamics are more pronounced at lower rendered forces, and may interfere with perceptibility.

#### 7.4.4 Study 2: Tool Usability and Educational Insights

##### Methods:

10 non-STEM participants (1st and 2nd year university undergrads with up to first year physics training, 6 female, 17-20 years) volunteered for 45-60 minute sessions. After an introductory survey, participants were randomly assigned to one of two conditions, *Mouse* (4 participants, M1-4) or *Hapkit* (H1-6). HapKit 3.0 was calibrated for force consistency between participants. After allowing participants to freely explore *SpringSim*, a survey assessed understanding and usability of various *SpringSim* interface components; misunderstood components were clarified. Three exit surveys elicited value of *SpringSim* components on 7-point Likert scales, cognitive load [137], understanding, and curiosity on 20-point scales, and

Task	Bloom	Description
1	Understand (2)	Rank three springs in order from least to most stiff
2	Understand (2)	Plot the relationship between displacement and force for two springs.
3	Apply (3)	Estimate the stiffness of an unknown spring, given two reference springs with known stiffness value
4	Analyze (4)	Predict the behaviour of springs in parallel.
5	Create (6)	Design a parallel spring system that uses two springs to behave like an individual spring of stiffness 55 N/m.
6	Apply (3)	Predict the behaviour of springs in series.
7	Evaluate (5)	Describe any relationships you have noticed between spring force, displacement, and stiffness.

**Table 7.1:** Learning tasks used with *SpringSim* in Study 2. *Bloom* level is a measure of learning goal sophistication [15]

preferred learning modality [83], respectively.

#### **Learning Tasks:**

We iteratively designed and piloted a task battery of escalating learning-goal sophistication [15] to expose strategies for force feedback use and general problem-solving (Table 7.1). Tasks did not require physics knowledge, and were suitable for both mouse and HapKit input.

#### **Analysis:**

We conducted t-tests on self-reported understanding, cognitive load, engagement, understanding, curiosity; and on objective metrics of time-on-task and number of spring interactions. Qualitative analysis of video and interview data used grounded theory methods of memoing and open & closed coding [49]. Together, these yielded insight into the usability of *SpringSim* and the *HandsOn* CM, and several themes describing the role of haptics in our tasks. Two participants were excluded from analysis of Task 1 due to technical failure.

#### **Results - Usability:**

After free exploration of *SpringSim*, participants rated their understanding of CM objects (yes/no) and their ease-of-use [1-7]: *Ruler* (10/10, 7.0), *Numerical Force*

*Display* (10/10, 6.5), *Playground* (10/10, 6.0), *Hand* (9/10, 6.0), *Spring Properties* (9/10, 6.0), *Spring Generator* (**7/10, 5.0**), *HapKit* (6/6, **4.5**), and *Haptic Feedback Controls* (5/6, **4.5**). While generally usability was good, interface clarity needed improvement in highlighted cases. Participants specifically noted confusion on radio button affordances, and *Spring Generator* input fields (due to redundant availability in *Spring properties*).

#### **Results - Task Suitability for Haptic Research:**

Regardless of prior physics knowledge, all participants were able to complete education tasks 1-6 (Table 7.1) in the allotted 60 minutes. We found no evidence that any task favoured one condition over another. When participants in the mouse condition were asked how their workflow would change with physical springs, participants weren't sure: "I don't know if that would've given me more information" (M4).

#### **Results - Haptics & Learning Strategies:**

We observed several themes relating to the influence of force feedback on a student's learning strategy.

*Haptics creates new, dominating strategies.* Learning strategies used by participants in the HapKit condition (H1-6) were more diverse than those in the mouse condition (M1-4). In Task 1, M1-4 all followed the same strategy, displacing all 3 springs the same distance and comparing the numerical force required to displace them. They then correctly inferred that higher forces are associated with stiffer springs (the *displace-and-compare* strategy).

By contrast, all 5 H participants included in analyses (H2 excluded due to technical failure) used force-feedback as part of their approach to Task 1. H1 describes applying the same force to the HapKit across all 3 springs, recording displacement to solve the task, while H5 described looking at the speed at which the HapKit was able to move back-and-forth in making his determination of stiffness, rather than through direct force-feedback of the device. Only H6 indicated that he "looked at the numbers for a sec", but no participant fully used the *displace-and-compare*

strategy we observed for M participants.

While the single-strategy approach worked for easy tasks, it was linked to errors and dead-ends in at least one instance in the mouse condition. In Task 5, M2-4 used *displace-and-compare* to validate their newly designed spring; M1 did not seek verification of his design. In contrast, H1,2,5,6 used haptic feedback to verify their designs. They did this by comparing how stiff their parallel spring system felt to a target reference spring. H4 guessed at an answer without verification. H3 used the *displace-and-compare* strategy, checking that equal forces were required for equal displacement.

*Haptic impressions of springs are enduring and transferrable.* HapKit participants were able to use their previous explorations to solve problems. In Task 3, M1-4 interacted with all three springs to find a ratio between force and stiffness. However, H participants interacted with springs fewer times (mean 1.5, sd 3.21) than M (6, sd 1) ( $p=0.018$ ). H2-4,6 did not interact with any springs, and H1 interacted with only one. This was because they had already interacted with the springs in previous questions: “I remember spring C was less stiff” (H3). Further suggesting the strength of haptic impressions, when H1 designed an inaccurate spring system for Task 5 ( $k=80\text{N/m}$  vs. expected  $k=55\text{N/m}$ ), she described the haptics as overriding the visual feedback: “they just felt similar. Even though the numbers weren’t really relating to what I thought.” Similarly, H2 arrived at an approximate result ( $k=40\text{N/m}$ ), after using force-feedback and acknowledges “... [it’s] slightly less than the reference spring, but it’s closer.”

*Haptics associated with increases in self-reported curiosity and understanding.* Participants’ self-reported curiosity significantly increased over the course of HapKit sessions from a mean of 6.3 (sd 3.83) to 10.8 (sd 3.92) in the Hapkit condition ( $p=0.041$ ). No significant changes in curiosity were detected in the mouse condition. Participants’ self-reported understanding significantly increased over the course of HapKit sessions from a mean of 3.67 (sd 4.03) to 11.83 (sd 3.19) ( $p=0.014$ ). No significant changes in understanding were detected in the mouse condition (before: 9.25, sd 5.32; after: 9.25, sd 5.32;  $p=0.77$ ).

In interviews, participants commonly made references to how the HapKit influenced their understanding: “I can use this thing for help if I really need some physical, real-world stimuli” (H5); “almost all of my thinking was based on how the spring [HapKit] ended up reacting to it” (H6). M2, who had a stronger physics background than others (IB Physics), was the only user to report a drop in curiosity and understanding over the course of the physics tasks, despite initial excitement: “the fun part is messing around with [SpringSim],” he exclaimed near the beginning of the exploratory phase.

#### 7.4.5 Study 2 Discussion

##### Tool and Tasks: Suitability for Learning and as Study Platform

*Adequacy and comprehensibility of underlying model:* Overall, *HandsOn* concepts proved an effective and comprehensible skeleton for *SpringSim*. Specific implementations rather than concepts themselves appeared to be the source of the reported confusions, and we observed that *HandsOn* should be extended with additional measurement tools (e.g., protractors, scales, calculators, etc).

*SpringSim performance:* This *SpringSim* implementation adequately supported most students in finishing learning tasks; extending available objects, properties and tasks will support advanced students as well. Future iterations should more clearly map *Design Palette* elements to the objects they support, increasing rendering fidelity and reconsider colors to avoid straightforward affordance issues. While participants did not heavily use haptic and visual controls, we anticipate these will be important for instructor and researcher use.

*Learning task suitability:* The learning tasks used here were fairly robust to time constraints of user-study conditions, did not require previous physics knowledge, avoided bias from standardized physics lessons, and exposed haptics utilization strategies without penalizing non-haptic controls. Currently, the task set ends by asking students to predict a serial system’s behavior; some students found pre-

dicting new configurations a large jump. Future task-set iterations could support integrative, prediction-type questions with interface elements that are successively exposed to allow prediction testing.

### **Evidence of the Role of Force Feedback in Learning**

*Curiosity and understanding leading to exploration:* Self-reported curiosity and understanding increased when forces were present. While these trends must be verified, curiosity is of interest since it can lead to more meaningful and self-driven interactions. Iterations on both tasks and tool should support this urge with an interface and framing that supports curiosity-driven exploration.

*Alternative strategies enabled by force feedback:* The HapKit's additional feedback modality enabled alternative task workflows, e.g., estimations of force appeared to supplant mathematical strategies for stiffness estimation. While possibly risky as a crutch, force assessments might be a useful step for students not ready for technical approaches (e.g., M3/Task 3 when stalled in attempting cross-multiplication). Future task-set iterations could encourage more *balanced* strategy use, e.g. mathematical *and* perceptual rather than primarily perceptual.

*HapKit salience, resolution & implications:* Overall, HapKit 3.0's fidelity was enough to assist participants verify a correct hypothesis. However, those who started with an *incorrect* hypothesis and used only HapKit to test it generally arrived at solutions that improved but were still inaccurate. Given the confidence that forces instilled, this is an important consideration. A formal device characterization will allow us to keep tasks within viable limits; we can also consider using low-fidelity forces more for reinforcement and exploratory scenarios.

### **Limitations and Next Steps:**

Our studies were small and used non-STEM university students as a proxy for high-school learners. Despite both limitations, they were useful for our current needs (rich, initial feedback establishing suitability and usability for *HandsOn* through

*SpringSim*); but may overestimate general academic ability and maturity. As we move into evaluation of learning outcome impact, larger and more targeted studies are imperative.

Future interfaces can both increase physical model complexity and breadth (e.g., complex mass-spring-damper systems), and extend *HandsOn* for more abstract education topics, such as trigonometry. We also plan to extend the *Playground* to support more engaging, open-ended student design challenges, such as obstacle courses using trigonometry concepts; this in turn requires new measurement tools and tasks that are more exploratory and open-ended.

#### 7.4.6 Conclusions

Haptic feedback's potential in STEM education use can only be accessed with a comprehensible, extendable, and transparent front-end. We present *HandsOn*, a conceptual skeleton for interfaces incorporating virtual forces into learning tasks, and assess its first implementation, *SpringSim* and task set. Our findings (on interface usability, task effectiveness, and impact of haptic feedback on learning strategies, understanding and curiosity) underscore this approach's promise, as we proceed to study haptic influence on learning outcomes themselves.

### 7.5 CuddleBit Design Tools: Sketching and Refining Affective Robot Behaviours

In Section 7.5, we explore a third non-vibrotactile modality - furry, affective, breathing robots called CuddleBits (Figure 7.14). These robots are multimodal: they visibly move, and their breathing can be felt. Their form factor and affordances can vary; for example, they can be flexible (Figure 7.14a) or rigid (Figure 7.14b). We use the CuddleBits as a rich design problem - supporting engaging, emotional, lifelike behaviour design - and as a means to explore the interplay between two design tools, each supporting different activities: *sketching* and *refining*.

As robots begin to take a larger role in our lives, they require natural ways of interacting with people. Notably, they need to communicate affectively with humans, recognizing and expressing emotion, or behaving with a believable personality. This is important for both everyday interactions with robots, and targeted

health applications: robot-based therapy can measurably relax people by breathing [237].




(a) “FlexiBit”, a fluffy, flexible CuddleBit. (b) “RibBit”, a rigid CuddleBit.

**Figure 7.14:** Two examples of CuddleBits, simple DIY haptic robots.


The Haptic Creature project [282, 283] explores the role of touch-based interactions with furry, zoomorphic robots. However, an early prototype of a multi-DoF haptic robot, the CuddleBit, suffers from slow iteration for both hardware form-factor and software behaviours. To explore these concepts more thoroughly, we developed the CuddleBits [33]: simple, affective robot pals built with a rapid prototyping (sketching) ethic. To control CuddleBit behaviour and inform HaXD support tools in this complex domain, we developed two software design tools: Voodle and MacaronBit (Figure 7.15).

Voodle (Figure 7.15a), from “vocal doodling”, is a novel *sketching* interface to easily create 1-DoF behaviours using non-speech voice, in particular, ideophones [65] like “Ooooh” and “Bwooop.” It is inspired by the onomatopoeia descriptions found with our initial exploration (Chapter 3) and previous work [240, 272]. Through a series of user studies, we developed a prioritized set of ideophones and how they mapped to movements of the CuddleBit. At the time of writing, Voodle is in active development; we are using participatory design to further identify critical features, Voodle’s expressive capability, and how it might fit into a design tool suite for the CuddleBit alongside MacaronBit.

MacaronBit (Figure 7.15b) is an adaptation of Macaron (Chapter 5) to control 1-DoF CuddleBit using a familiar track-based metaphor. Instead of two tracks controlling amplitude and frequency, MacaronBit has five: low-frequency amplitude

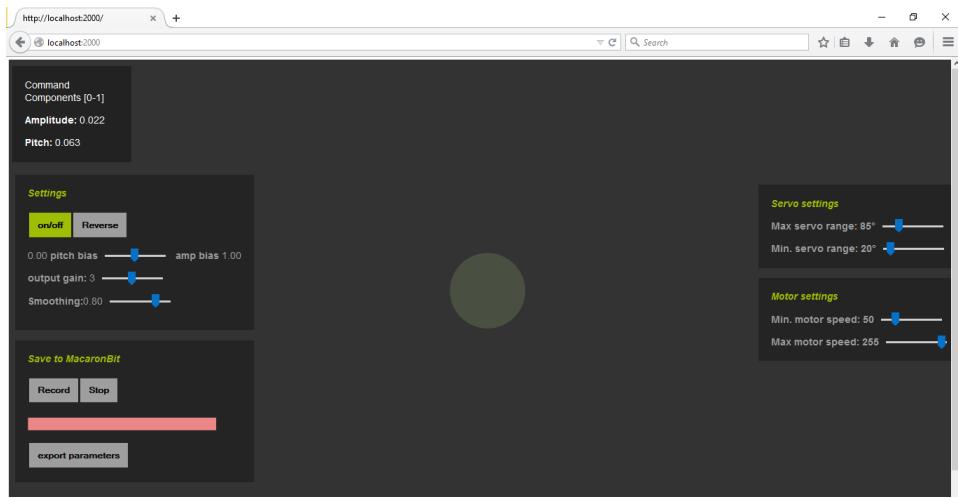

**(a)** Voodle, a vocal doodling interface that uses voice to control the CuddleBit. The circle in the middle visualizes the CuddleBit's movement on-screen, while additional controls adjust algorithms for vocal processing.

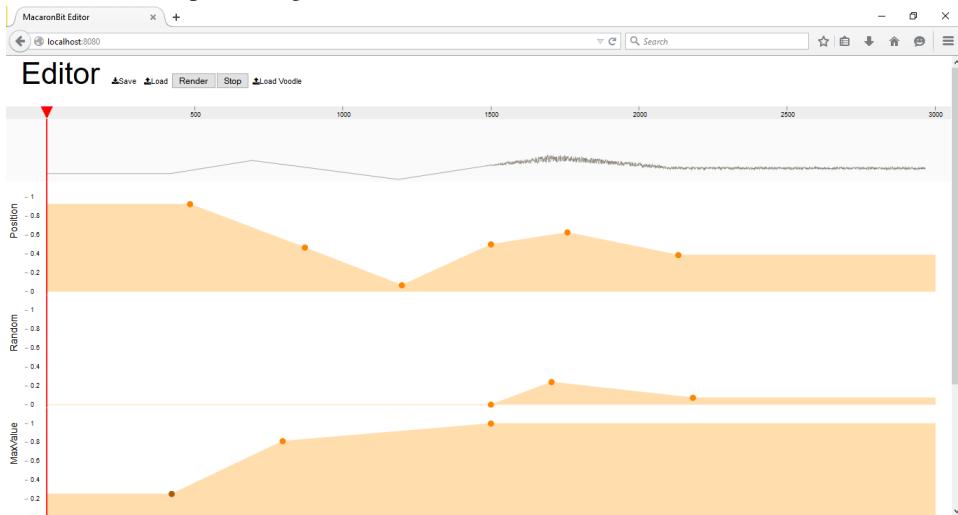

**(b)** MacaronBit, a version of Macaron (Chapter 5) extended to control CuddleBits.

**Figure 7.15:** CuddleBit design tools. Voodle enables initial *sketching* of affective robot behaviours, while MacaronBit enables *refining*.

and frequency (for breathing); high-frequency amplitude and frequency (for “shakiness” or “noise”), and bias (asymmetry in the signal), determined during piloting.

Voodle and MacaronBit are symbiotic. Users can record voodles and export them to MacaronBit; initial result suggest that they each support different goals for users. Together, Voodle and MacaronBit represent *sketching* (Chapter 3) and *refining* (Chapter 4), showing that this dichotomy provides a useful framing when creating HaXD support tools and applies to other display types beyond VT icon design. Research is ongoing in a series of user studies, exploring expressiveness and consistency of designed behaviours, the specific capabilities and roles of the two tools, and important considerations for future development.

## Chapter 8

# Haptic Experience Design

*Preface* – In Chapters 3-7 we take a design perspective, investigating by doing. The VT design tools each enabled short in-lab sessions of design, which we could study directly; however, this approach lacks external validity. Proxy design in Chapter 6 and the focused design projects in Chapter 7 offered ample opportunities to gain implicit knowledge about design; these results are ecologically valid but specific to only one group (our lab). To triangulate both these approaches, we study the wider community: expert haptic designers in the wild. Here, we report findings from six interviews with expert haptic experience designers, augmented by a workshop we coordinated at a major international haptics conference. We found themes at three levels of scope: 1) the holistic nature of haptic experiences, 2) the collaborative ecosystem in which hapticians works, and 3) the broader cultural context of haptics. Chapter 8<sup>1</sup> both grounds our work and serves as a capstone: we define and characterize HaXD as it occurs in practice, codify challenges for HaXD, and develop recommendations to further develop the field that are grounded in this new understanding of designers. We conclude with a vision for how HaXD might manifest in the upcoming years.

---


<sup>1</sup>This work has been prepared as a manuscript and is presented as one.

## 8.1 Overview

From simple vibrations to roles in complex multimodal systems, haptic technology is often a critical, expected component of user experience – one face of the rapid progression towards blended physical-digital interfaces. Haptic experience design is thus now becoming part of many designers’ jobs. We can expect it to present unique challenges, and yet we know almost nothing of what it looks like “in the wild” due to the field’s youth and the difficulty of accessing practitioners in professional and proprietary environments. In this paper, we analyze interviews with six professional haptic designers to document and articulate haptic experience design, observing designers’ goals and processes and finding themes at three levels of scope: the holistic, multimodal nature of haptic experiences, a map of the collaborative ecosystem, and the cultural contexts of haptics. Our findings are augmented by feedback obtained in a recent design workshop at an international haptics conference. We find that haptic designers follow a familiar design process, but face specific challenges when working with haptics. We capture and summarize these challenges, make concrete recommendations to conquer them, and present a vision for the future of haptic experience design.

## 8.2 Introduction

Haptic feedback provides value in several ways, especially accessibility [14], low-attention feedback [170], and motor skill training [181]. Recently, high-fidelity haptic technology has expanded user experience. Emotional therapy [269, 282], education [221], and entertainment [225] are increasingly employing haptic feedback. Technological advances enable more compelling haptic sensations in consumer products by making it possible to render variable friction on direct-touch surfaces [160, 276], and produce forces without needing to ground devices to a table or wall [57, 277]. Even commodity vibrotactile displays are increasing in expressiveness, with high-quality actuation a priority in devices like the Apple Watch ([www.apple.com](http://www.apple.com)) and the Pebble watch ([www.pebble.com](http://www.pebble.com)), although often at the cost of painstaking and costly design effort. Touch is now increasingly studied within market research because it improves the quality of product opinions and encourages consumer purchases [131]. Part of the power of touch is its emotional,

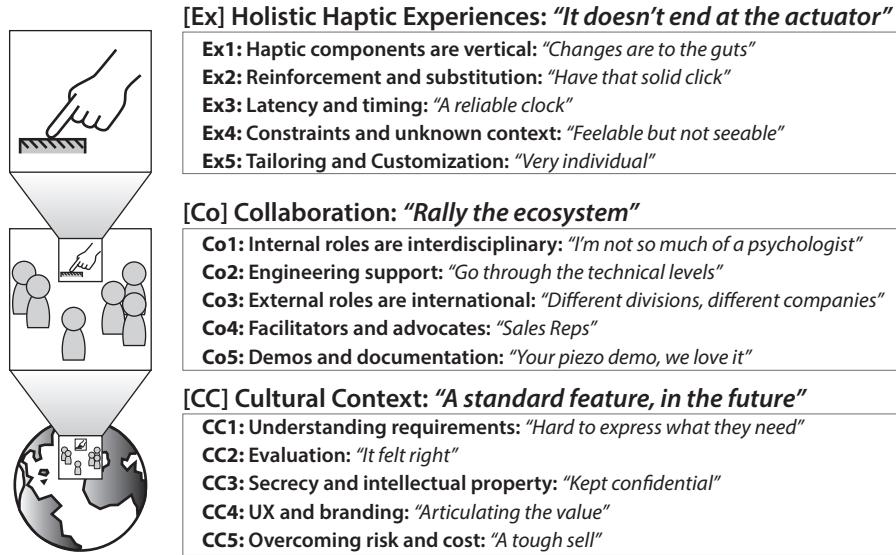

**Figure 8.1:** Our three themes, each exploring different levels of scope through 5 emergent sub-themes.

visceral [190] value with it has within a design, giving haptics a close relationship with user experience.

### 8.2.1 Haptic Experience Design (HaXD)

We define HaXD as:

*The design (planning, development, and evaluation) of user experiences deliberately connecting interactive technology to one or more perceived senses of touch, possibly as part of a multimodal or multi-sensory experience.*

Our focus is on gaining a better understanding of the workflow and processes currently used by *hapticians*, the people who practice HaXD as part of their day-to-day work. We describe a two-part, multi-year study that examines how contemporary hapticians design haptic experience for use in real-world products. We begin by identifying current obstacles to good HaXD and the target audience for our work, then provide a roadmap to the rest of the paper.

### **8.2.2 Obstacles to Design**

The academic literature suggests many challenges to design for haptic experience. Haptic content remains scarce and design knowledge is limited. Some issues are technological, arising in the hardware and software, such as highly variable hardware platforms and communications latency [140]. Other issues are human-centered, arising from individual user characteristics in perception and preferences: low-level perceptual variation [164], responses to programmed [160] and natural [116] textures, sensory declines due to aging [253, 254], and varied interpretation and appreciation of haptic effects and sensations [238, 240] – often because of personal experience [228].

These research findings are reinforced by many interactions the authors have had with practitioners in industry. Suspecting that there are many challenges related to haptics that face industrial designers, but having little direct evidence to back this up and guide our research, and further suspecting that it is somewhat rare for professionals to design haptic experiences explicitly rather than doing so in the course of larger design efforts, we embarked on a multi-year study of the workflows used by designers when they are engaged in HaXD – something that has been largely unexplored in the literature.

**In our study, we take a first in-depth look at haptic designers' experiences to describe HaXD, identify unique challenges, and connect HaXD to other fields of design.** We focus specifically on HaXD instead of the more general notion of “haptic design,” which can also refer to design practices related to haptics not directly involving user experience, *e.g.*, mechanical design of a new actuator or software design of a new control method. Our definition encompasses pseudo-haptics [208] and other illusions that trick a user into thinking haptic feedback is occurring without direct tactile or kinesthetic stimulation. Much of what we discuss can also be gainfully applied to the design of tangibles, even with their lack of actuation, although we leave them out of our scope to focus on actuated interfaces. For brevity we sometimes use “haptic designers” to refer to haptic experience designers, while recognizing that beyond these pages this term may include other aspects of haptic design, including purely hardware and software components. We adopt the term “haptician” as shorthand for a practitioner of HaXD.

### **8.2.3 Target Audience**

We primarily target readers who are one step removed from HaXD, but who have other design, haptics, or business expertise relevant to haptics.

We expect that ***haptic experience design experts*** (hapticians) will be unsurprised by the insights herein. Although they are not our primary audience, we hope that the articulated challenges and recommendations will nevertheless still be useful for their practice because it consolidates their *ad hoc* knowledge into a formal framework.

We expect that ***non-haptic design experts*** will find our discussion of the specific challenges to HaXD informative because it reveals processes of design that are invisible or are taken for granted in other fields. We also hope non-haptic designers might lend their expertise to accelerate the generation of tools and techniques for creatively working with these complex interactive systems.

We expect that ***non-design haptic experts*** will develop a further appreciation for how UX design is important for successful haptic technology, and will gain an understanding of how their devices or research findings are applied in practice. The recommendations we provide may also motivate several avenues of either basic and applied haptic research that these experts could pursue.

We expect that ***industry practitioners*** will gain insight into how the business case for haptic technology might be more quickly built. This includes those already involved with haptics or similar technologies such as wearables, as well as those looking to become involved. We believe our findings may help cultivate connections between the diverse stakeholders involved with HaXD, and that the challenges (and thus the opportunities) that we identify will inspire people to work more with this emerging modality.

### **8.2.4 Roadmap for the Reader**

We describe a two-part, multi-year study in which we sought to gain a solid understanding of HaXD as it is currently practiced “in the wild” by actual practitioners (hapticians) in their day-to-day work. After a review of the existing literature in **Section 8.3**, we report on the first part of our study in **Section 8.4**: a grounded theory [49] analysis of intensive interviews with six professional haptic designers.

In our results, we describe observations about haptic designers' process organized in three cross-cutting themes: the complex, holistic nature of the experiences they design; the collaborative ecosystem in which haptic experience designers play multiple roles; and the influences of the cultural contexts in which haptic experiences are used and the value and risk this poses. In **Section 8.5** we describe the second part of our study, conducted in a workshop at a major international haptics conference (World Haptics 2015), where we collected quantitative and qualitative feedback from a broader sector of industry and academic designers regarding tool use, collaboration, evaluation methods, and challenges facing haptic designers. In **Section 8.6**, we summarize and discuss our overall findings in three major areas:

1. A description of current HaXD practice showing how it has already emerged as a distinct field of design.
2. A list of challenges facing haptic experience designers, and some unique considerations HaXD requires compared to other more established fields of design.
3. Recommendations for accelerating the development of HaXD as a full-fledged field of design.

We conclude with a few remarks imagining what a mature discipline of HaXD might look like in the near future.

### 8.3 Related Work

In this section, we discuss key elements of contemporary thinking about user experience design (UX design or XD) and a specific approach known as “design thinking.” We then broadly review haptic technology (hardware and software) and relevant aspects of human perception before providing a critical summary of previous efforts to understand and support HaXD.

#### 8.3.1 Design Thinking as a Unifying Framework

Design thinking is an empowering way to approach technology and user experiences. At the heart of this practice is the rapid generation, evaluation and iteration

of *multiple* ideas at once [30]. There are several general design activities that we observed in our participants that reflect design thinking, most notably, problem preparation, sketching-like iteration, and collaboration.

Many advocates of design thinking refer to an explicit problem preparation step preceding initial design [235, 244, 271], which involves “getting a handle on the problem” and drawing inspiration from previous work. Designers find value in this stage because creative acts can be accurately seen as recombination of existing ideas, with a twist of novelty or spark of innovation by the individual creator [271]. This stage draws from the designer’s experience, including their understanding of the *domain* (symbolic language of the field) [54], and the ability to *frame* a design problem to match it to their repertoire, their collected professional (and personal) experience [235]. External examples are especially useful for inspiration and aiding initial design [30, 113]. Early and repeated exposure can increase creativity, although late exposure carries a risk of conformity [149].

Later in this paper, we describe the evidence we found in our study that haptic designers’ work naturally includes a dedicated problem preparation step, *e.g.*, by employing collections of examples in a number of ways.

*Sketching* is another critical design activity. It supports ideation, iteration, and evaluation. Here, more generally than pen and paper, we refer to general techniques to suggest, explore, propose, and question [30], including physical ideation [185]. Some researchers declare sketching to be the fundamental language of design, much like mathematics is considered the language of scientific thinking [51]. Sketching is rapid and exploits ambiguity, allowing partial views of a proposed design or problem. Detail can be subordinated, allowing a designer to zoom-in, solve a problem, and then abstract it away when returning to a high-level view. It can also support multiple, parallel designs, delaying commitment to a single design [106, 211]. The fluidity and *ad hoc* nature of sketching extends to software tools: designers must be able to rapidly undo, copy and paste, and see a history of progress [211].

We discuss techniques for haptic sketching in prior work to support HaXD, and find major barriers to achieving fluidity that were identified by participants in our study.

*Collaboration* improves design. Involving more people increases the potential

for generating more varied ideas [271], and is recognized as being important for creativity support tools [211, 244]. Although group dynamics can influence the design process negatively, proper group management and sharing of multiple ideas quite often results in more creativity and better designs [113], and can even influence the work of crowds [68]. Collaboration can be categorized by intent, such as informal conversations with colleagues or widespread dissemination [244], or by physical and temporal context: collocated (collaborators in the same location) or distributed (in different locations), and synchronous (simultaneous) or asynchronous (at different times) [75].

We find these categorizations useful to identify where collaboration can break down for haptic design, especially remotely, asynchronously, and with limitations on informal or widespread sharing. In Section 8.4.2 we present the first data-informed description of collaboration in HaXD.

### 8.3.2 Haptic Perception and Technology

Haptic technology is typically separated into two broad classes based on the complementary human sense modalities: *tactile* sensations, perceived through the skin, and *proprioception*, or the sense of body location and forces; the latter includes *kinaesthetic* senses of force and motion. On the human side these are further subdivided into different perceptual mechanisms, each targeted with different actuation techniques. We overview the complexity of the different senses that make up touch, then describe common actuation technologies for these senses, focusing on those mentioned by participants in our study. Finally, we review major application areas that use haptics for both utility and emotional value.

Human perception of touch is synthesized from the tactile and proprioceptive senses, and is influenced by vision and hearing. Tactile sensations rely on multiple sensory organs in the skin, each of which detect different properties, *e.g.*, Merkel disks detect pressure or fine details, Meissner corpuscles detect fast, light sensations (flutter), Ruffini endings detect stretch, and Pacinian corpuscles detect vibration [48]. Proprioception, the sense of force and position, is synthesized from multiple sensors as well: the muscle spindle (embedded in muscles), golgi-tendon organ (GTO) in tendons, and tactile and visual cues [141]. Humans use these senses

together to learn about the world, *e.g.*, stroking, bending, poking, and weighing objects in active exploration [151]. Haptic perception is also heavily influenced by other senses. In the classic size-weight illusion [44], when two weights have the same mass but different sizes, the smaller is perceived to be heavier, whether size is seen or felt [109]; similarly, sound can affect how a texture feels [109]. Interactive systems can exploit cross-modal perception to reinforce or improve haptic sensations. To be effective, these effects need to be temporally synchronized, sometimes as closely as 20-100ms [140]. For more information about haptic perception, we direct the reader to [48, 141, 152].

Haptic technology to produce stimuli for humans to feel is at least as diverse as the human senses that feel it. Today, the most common approach is vibrotactile (VT) feedback, where vibrations stimulate Pacinian corpuscles in the skin, *e.g.*, smartphone vibrations. VT actuators can take many forms. Eccentric mass motors (sometimes “rumble motors”) are found in many mobile devices and game controllers, and are affordable but inexpressive. More expressive mechanisms such as voice coils offer independent control of two degrees of freedom, frequency and amplitude. Piezo actuation is a very responsive technique that is typically more expensive than other vibrotactile technology. Linear resonant actuators (LRAs) shake a mass back and forth to vibrate a handset in an expressive way; a common research example is the Haptuator [279]. Currently, LRAs are increasingly deployed in mobile contexts (*e.g.*, the Apple Watch Taptic engine). Our participants also employ force-feedback, which engages proprioception. Common force-feedback devices include Geomagic Touch (previously the Sensable PHANTOM) and Falcon devices, offering three degrees-of-freedom: force in three directions. At other times, entire screens might push back on the user in a single degree-of-freedom. These are only the most common feedback methods discussed by our participants. Many other types of feedback can be used, *e.g.*, temperature displays [138] or programmable friction display on touch screens [160, 276].

### 8.3.3 Efforts to Establish HaXD as a Distinct Field of Design

Researchers have developed several approaches to support HaXD. Some have directly applied design metaphors from other fields to haptics. Others have built col-

lections of haptic sensations and toolkits that facilitate programming. A number of haptic editors, analogous to graphical editors like Adobe Illustrator, have emerged to support specific haptic modalities through parameterized models or other abstractions. These approaches have developed focused understandings of particular aspects of HaXD, but they do not adequately describe the process as it is actually practiced.

There are many examples of designers drawing from other fields to frame the practice of haptic design. Haptic Cinematography [63] uses a film-making metaphor, discussing physical effects using cinematographic concepts and establishing principles for editing based on cinematic editing [99]. Similarly, Tactile Movies [145] and Tactile Animation [233] draw from other audio-visual experiences, and Cutaneous Grooves [102] draws from music to explore “haptic concerts” and composition as metaphors. Academic courses on haptics are taught with a variety of foci, including perception, control, and design that provide students with an initial repertoire of pre-existing skills drawn from other disciplines [134, 196]. These and other ways of framing HaXD have been incorporated into rapid prototyping techniques that allow for faster, easier iteration of haptic designs. Simple Haptics, epitomized by *haptic sketching*, emphasizes rapid, hands-on exploration of a creative space [185, 186]. Hardware platforms such as Arduino ([arduino.cc](http://arduino.cc)) and Phidgets ([phidgets.com](http://phidgets.com)) [96], as well as the recent trend of DIY haptic devices [85, 89, 198], encourage hackers and makers to include haptics in their designs.

The language associated with tactile perception (terms related to haptic sensation and how they are used), especially affective (emotional) terms, is another way of framing haptic design. Many psychophysical studies have been conducted to determine the main tactile dimensions with both synthetic haptics and real-world materials [76, 193]. Language is a promising way of capturing user experience [191], and can reveal useful parameters, *e.g.*, how pressure influences affect [289]. Tools for customization by end-users, rather than by expert designers, are another place that efforts have been made to understand perceptual dimensions using a language-based approach [239, 240]. However, this work is far from complete; touch is difficult to describe, and some researchers even question the existence of a tactile language [131].

Meanwhile, software developers who want to incorporate haptics into their systems are supported by large collections of haptic sensations and programming toolkits. Sensation collections most commonly support VT stimuli. The UPenn Texture Toolkit contains 100 texture models created from recorded data, rendered through VT actuators and impedance-type force feedback devices [56]. The Feel Effect library [128], implemented in FeelCraft [225], lets programmers control sensations using semantic parameters, *e.g.*, “heartbeat intensity.” Immersion’s Haptic SDK ([immersion.com](http://immersion.com)) connects to mobile applications, augmenting Android’s native vibration library with both a library of presets, and on some mobile devices, low-level drivers for effects like fade-ins. VibViz [240] is a free on-line tool with 120 vibrations organized around five different perceptual facets. Force-feedback environments tend to be supported through programming toolkits. CHAI3D ([chai3d.org](http://chai3d.org)), H3D ([h3dapi.org](http://h3dapi.org)), and OpenHaptics ([geomagic.com](http://geomagic.com)) are major efforts to simplify force-rendering. Table-top haptic pucks can use the HapticTouch Toolkit [153], which includes parametric adjustment (*e.g.*, “softness”) and programming support.

Finally, several software-based editing tools support haptic design for different devices. These tend to focus on VT stimuli or simple 1-degree-of-freedom force feedback. Many editors [76, 180, 219, 231, 257, 258] use graphical mathematical representations to edit either waveforms or profiles of dynamic parameters (torque, frequency, friction) over time. Of these, Vivitouch Studio [258] offers the most integration with other modalities in games, and Macaron [231] is the most available tool (online and web-based). The Vibrotactile Score [157] uses a musical metaphor, shown to be preferable to a programming metaphor as long as the designer has musical experience [155]. Mobile “sketching” tools like the Demonstration-Based Editor [117] and mHIVE, a Haptic Instrument [228] are useful for exploration, but not refinement. Since iOS 5 (2011), Apple has let end-users create on/off vibrations as custom vibration ringtones. Immersion’s Touch Effects Studio lets users enhance a video from a library of tactile icons supplied on a mobile platform. Actuator sequencing [199], movie editing [145], and animation [233] metaphors enable multi-actuator, spatio-temporal VT editing.

Some of these tools are founded in an understanding of haptic designers’ needs [233, 258] and begin to capture a slice of the HaXD process [231], but they do not

fully capture the context and activities of contemporary haptic design.

## 8.4 Part I: Interviews with Hapticians about HaXD in the Wild

In this section, we present findings from the first part of our study, a qualitative analysis of interviews with six professional haptic designers who we refer to as “hapticians.”

### 8.4.1 Method

One researcher (the first author) analyzed the interview transcripts through grounded theory [49] influenced by phenomenology [187] and thematic analysis [218]. The analyzing author, who was trained in qualitative methods, first transcribed interviews and then examined every participant statement, tagging each with relevant and recurring concepts and keeping written notes for reflection and constant comparison. Emergent sub-themes (sub-categories) [218] were discovered using qualitative techniques of memoing, iterative coding [49], clustering and affinity diagrams [187]. Statements were later grouped according to tags, organized using affinity diagrams and clustering, and iteratively developed with further writing and reflection. The 15 sub-themes clustered into three themes (categories) [49, 218]. We describe the themes in Section 8.4.2 after an introduction to the designers themselves and the procedure that was followed for the interviews. We delay a detailed discussion of the results until Section 8.6 so we can include the findings of the second part of the study, presented in Section 8.5.

### Participants

Six participants were recruited, 5 male and 1 female. Initial contact was by email from a list of potential interviewees developed by the researchers. We describe each in terms of experience and training, area of focus within HaXD, types of projects, and constraints or other factors that might situate or provide insight into the interview. Experience and position are reported as of the interview year (2012).

**P1** (M, over 15 years of human factors experience, PhD) held a design and human factors position at major healthcare company. He worked with auditory

alarms, signals, and emotional experience. Despite a focus on audio, he frequently related his work to haptics and works with physical controls, designing characteristics like force profiles and detents, and described the haptic and audio processes as being the same. Working in health care means there are tight regulations that need to be followed, and a noisy, diverse environment. P1 used a number of psychology and human factors techniques, such as semantic differential scales, factor analysis, and capturing meaning.

**P2** (M, 5-6 years in haptics, PhD) described two projects: his experience adding mechanical feedback to touch screens at a major automotive company, and his PhD work on remote tactile feedback, where feedback was displayed on one hand while the other interacted with a touch screen. P2's main concern is "rich feedback", communicating information like affordances to the user. This is both pragmatic, such as "consequences" of the button, and affective, aiming to have sensations "feel right." P2 focused on button presses on a touchscreen, rather than exploring "roughness" of a touchscreen or other surface.

**P3** (M, 10 years leadership experience with actuation, sensing, and multimedia, M.Eng.) worked at a company that sells actuators used to add haptics to technology (like a tablet computer, game controller, or mobile phone). P3 had 20-30 projects going on at any time, each with their own level of size, goals, constraints, and other contexts. His main goal was to sell a developed actuator (with several variants).

**P4** (M, 11 years of design, development, and analysis/simulation experience, PhD) also puts actuators into new form factors (*e.g.*, touch screens in cars). When he worked, he had limited time and resources, so there is not much time to change things.

**P5** (M, 12 years of haptics UX experience, M.Sc.) held a user experience leadership position at major haptics company that sells haptic control technology and content; he described mostly software solutions. His company worked with different domains, but most examples are from mobile phones (handhelds), with a brief mention of automotive haptic feedback. They worked with extremely high-end piezo vibration actuators with high bandwidth (frequency and mechanical), and delivered software solutions for Android to their customers: OEMs (original equipment manufacturers). He described handheld feedback as two different classes: confirmation haptics, like a vibration to indicate a widget has been used,

and animations/gestural feedback, which is more complicated.

**P6** (F, 5-6 years in haptics, PhD) worked at a major car manufacturer. She primarily designed “feel” properties such as friction, inertia, and detents of physical controls inside automobiles. P6 also works on active haptic controls. Design aspects include measuring force vs displacement profiles and maintenance of a large scale haptic design specification repository that spans user and technical requirements. This haptic specification repository is used by many engineering and business stakeholders across many sites in different countries.

### **Procedure**

One co-author interviewed the 6 participants in April-May 2012 using Skype. Each interview lasted 30-60 minutes and consisted of initial ice-breaker and general open-ended questions, then increasingly detailed questions about participants’ processes. Interviews followed a semi-formal, structured qualitative inquiry process that allowed for followup. Interviews with P2-P5 were fully recorded and transcribed. Interviews with P1 and P6 were collected only as interviewer notes. In the presentation of our findings, double quotation marks (“...”) denote direct transcription quotes for P2-P5 while single quotation marks (‘...’) denote interviewer notes for P1 and P6.

### **8.4.2 Results**

Most of the emergent themes that we identified persist throughout the design process (Figure 8.1). We found participants generally followed a process typical of experience design (UX) [30] in which they first tried to gain an understanding of the design problem, then iteratively developed ideas and evaluated them. We first outline these confirmatory observations on process, then go on to report on the themes, our main findings. Throughout, we cross-reference themes by section number and theme label (*e.g.*, 8.4.2/Co5).

#### **Observations on Design Process**

Participants described the initial stages of a project as a time to establish and understand requirements, gather initial design concepts, and define or negotiate project

parameters. Designers often collected examples of haptics, such as mechanical buttons and knobs, for inspiration (8.4.2/Co5), and they gathered requirements – both direct requirements for haptic designs (8.4.2/CC1), and project parameters around the value, cost, and risk of haptic technology (8.4.2/CC4,CC5).

P2-P6 explicitly referred to an iterative process. They all found different ways to fit it into their collaborative ecosystem and constraints. As we elaborate below, prototyping and assessment in the physical medium of haptics has many challenges that set it apart from graphical or auditory domains even as designers navigate very common-place objectives. For example, initial requirements were often not actually what clients wanted, and our designers would have to iterate (8.4.2/CC1). P5's teams explicitly follow a conventional user-centered design process, iterating simultaneously on prototypes and their understanding of customer needs. P3 sometimes has to ship mockups and devices back and forth with their customers (8.4.2/Co5). Each design problem faced by our participants had to be treated as a unique problem, with designers fine-tuning their design to fit the problem (8.4.2/Ex5). Our designers used a variety of evaluation techniques to choose their final designs (8.4.2/CC2).

We now proceed with our cross-cutting themes, organized by scope (Figure 8.1): the haptic experience and its implementation (Section 8.4.2), the designers' collaborative ecosystem (Section 8.4.2), and implications from the wider cultural context of haptic technology and business requirements (Section 8.4.2).

#### **[Theme Ex] Holistic Haptic Experiences: “It doesn’t end at the actuator”**

Context is crucial to experience at multiple levels, but is difficult for a designer to foresee or control. Aspects of context range from immediate, very local electromechanical environment (material properties, casing resonance, computational latencies), through the user’s manner of touching the haptic element (grip, forces, longevity of contact), to the user’s momentary environment, attention, and goals.

At the local end, the complexity of the haptic sense itself is a major factor in expanding the haptic experience design space substantially beyond what are usually its initial requirements – for example, for the changing feel of a modal physical control in an automobile cockpit. As we’ve discussed, the haptic sense is really a

collection of subsenses [48, 141], working together to construct an overall percept, *e.g.*, material properties deduced from stroking, tapping, or flexing a surface or object [151]. Grip, materials, dynamics as well as visual and audio aspects all play a part in the result.

*“The problem is it doesn’t end at the actuator, there’s a lot to do with the case of the device, the mass of the device, the mechanical coupling between the device and the hand...this all comes into play because it’s a tangible experience, and so if there’s mechanical resonances that get stimulated by the actuator that make it sound noisy, then it becomes a cheap experience, even if it has a piezo actuator.”* (P5)

Thus, designers both face multifaceted constraints and have opportunities to circumvent those constraints. We begin by discussing implications for implementation, wherein haptic components are directly related to the internal mechanics – the “guts” – of the system (Sub-theme Ex1). Then, we move on to opportunities for improving design: strategies like reinforcement and substitution are powerful tools for haptic designers (Ex2). Timing is critical, enabling abovementioned opportunities while imposing constraints: designers must introduce no new delays and carefully synchronize feedback (Ex3). However, the full extent of a sensory context is sometimes uncontrollable or unknown, and at such times prevent designers from using their tricks (Ex4). We finish this section by discussing how haptic experiences are often bespoke, tailored to constraints of known contexts, or customizable to unknown contexts (Ex5).

**Ex1: “Changes are to the guts” – Haptic components are vertical.** Haptic experiences are created when the actuating component physically interacts with other system components. Changing a haptic component can thus affect the entire system’s design, unlike many other upgrades, like improving memory in a mobile phone: *“you get the impression every other month they have a new phone...but the guts of it do not change much”* (P3). New phones often just have a faster CPU or more memory swapped into an essentially unchanged system; but when adding or modifying haptic components, designers must consider the entire system including the physical casing, and possibly modify it as well:

**Table 8.1:** Sub-theme summaries for the Holistic Haptic Experiences (Ex1) theme.

Code	Sub-theme descriptor	Explanation
<b>Ex1</b>	Haptic components are vertical	Changing a haptic component may influence the larger hardware/software system, and vice-versa.
<b>Ex2</b>	Tricks to create great feels	Haptic designers can improve designs and work around constraints through multimodal tricks.
<b>Ex3</b>	Latency and Timing	Without fast feedback and synchronized timing, haptic experiences fall apart.
<b>Ex4</b>	Constraints and unknown context	Other modalities may impose constraints; constraints may not always be knowable.
<b>Ex5</b>	Tailoring and customization	Designers tailor their solutions to each application; end-users benefit from customization.

*“First we had to get the outer dimensions [of the prototype’s case] roughly about right, to get the visual impression close to what it resembles later in the application” (P4).*

This effect is bidirectional. Changing the size or material of the casing can have a profound effect on the sensation; correspondingly, any changes to the haptics will have an effect on the entire structure of the device. Changes to software are also cross-cutting: *“we’re digging into the source code of Android...we need to make sure that we have the right hooks in the right locations...that’s a software architecture issue, right?”* (P5).

#### **Ex2: “Have that solid click” – Tricks to create great feels.**

Haptic designers have an array of techniques to create great experiences, working around constraints and uncertainty. The first step is to have a fast, responsive actuator when possible. Previously, creating good actuators was a goal for our participants: *“[what we] strived in the past significantly to do was to push the market towards high mechanical bandwidth actuators, so actuators that can respond in 15 milliseconds or less”* (P5). Now, high-quality actuators are a main competitive advantage:

*“High-definition feels over a very broad frequency range, with enough strength and small enough, and especially very fast response time, that’s our business”* (P3).

As discussed in Ex1, the actuator does not determine the experience alone, but interacts with physical materials and non-haptic senses. When a haptic device’s ultimate situation is known at design time – like a car dashboard – designers can modify properties of the larger physical system to improve the overall haptic experience: *metal makes unwanted sound, so change it with a plastic* (P6). The designer can also make a sensation more convincing with multimodal reinforcement, e.g., adding visual or audio feedback:

*“Need to have that solid [haptic] click at 150 [Hz] plus some audio at 300 or 400 Hz, which is going to give you that sense of quality, and, consistency across the whole dashboard”* (P5).

When a known physical context has constraints, designers also use substitution to enable or improve the haptic interaction. P2 describes two such occasions, one for sensing input and one for displaying output. Because P2 could not sense input pressure, he instead used how long the user was pressing the screen (“dwell time”): *“we were substituting the forces that are needed on the actual buttons with dynamic dwell times”* (P2). This was only possible because P2 had knowledge of *how* the user would be touching the control, and thus could deduce that dwell time was a reasonable proxy for pressure. In another case, P2 could not actuate a touch screen, so he used tactile feedback on the other hand – again, requiring knowledge of and considerable design access to the device’s and user’s larger situation; here, the steering wheel.

### **Ex3: “A reliable clock” – Latency and Timing.**

One underlying requirement for great haptic experiences is responsive timing. Feedback must be fast; modalities must be synchronized. Effective reinforcement requires simultaneity and hence tight (millisecond) control over timing. This is well established in the literature [140, 161] and known to our designers: *“I think, audio feedback and tactile feedback and visual feedback has to happen at a certain time to have a real effect”* (P2).

Latency accumulates throughout the computational pipeline, with actuator responsiveness the very last stage and rarely the most impactful. Designers must minimize computational delays wherever possible. P2 describes unintentionally adding latency to one project: “*we had this Python program and Arduino and all this communication going on*” and how he “*threw out some of the serial communication which [had] made the whole thing a little slow*”, and thus, the “*latency again felt right*”. Timing problems between components can happen at any time: “*we've gotten in situations before where we've been very near to completion in design projects, and for whatever reason we can't get a reliable clock, from the CPU, then the whole thing falls apart*” (P5).

When adequate simultaneity constraints are met, the user perceptually *fuses* these non-collated events (activating a graphical element on a screen, and feeling a tick on the steering wheel) into a single percept: “*somewhat you connect these two things, the action with the dominant hand and the reaction that is happening somewhere else*” (P2). Haptic designers thus need access to the computational pipeline to circumvent physical constraints with multimodal tricks.

**Ex4: “Feelable but not seeable” – Unknown user constraints and context.** Haptic designers sometimes contend with unavoidable constraints emerging from physical context or application space. Some constraints not only limit multimodal synergies, but go on to actively limit haptic display. For example, eyes-free interaction in cars means that visual reinforcement is unavailable; indeed, visual movement may have to be avoided altogether for safety reasons. P4 is tasked with creating a “*feelable but not seeable*” sensation to “*avoid having to use visual feedback*”, as “*driver distraction is always a big topic*” (P4). This means P4 has limited control over his designed haptic sensation, as it cannot visibly move, but P4 can use audio reinforcement or substitution to handle constraints.

Perhaps even more difficult is when the experience’s context is unknown. This can derive from at least two sources: protection of intellectual property (IP) through secrecy, and unconstrained end-user situation. Stakeholders often keep key contextual information such as the visual interface secret from third party designers (e.g., OEMs [original equipment manufacturers] or consulting): “*we can suggest components, and suggest characteristics of the HMI [human-machine interface]*

*system, but the exact visual design of the HMI system is the OEM's knowledge*" (P4). P3 has an *evaluation kit* to send to potential customers when customers' IP is a concern:

*"[An evaluation kit is] basically a little box that consists of our actuator and some electronics, and that box is connected and driven through the USB port of a computer, and you can then mechanically integrate the box in your own way, so we don't need to know what their design looks like"* (P3).

We discuss IP and secrecy more in Section 8.4.2/CC3. Meanwhile, designers must deal with sometimes unknowable end-user context, especially with mobile scenarios. A high quality LRA-type actuator on a metal table can sound cheap, while an affordable eccentric mass actuator can sound like purring if it's on rubber, and "*there's not much you can do from a haptic perspective, other than allow the user to turn it up or down*" (P5).

**Ex5: "Very individual" – Tailoring and customization.** Because the context of haptic technology can vary so much, haptic designs need to be tailored for each client's problem and are often made customizable for end-users. For the former, several participants' business models are directly based on tailoring. P4's group makes a small set of actuators, adapting them to each specific request. This is exacerbated because it is "*hard for [customers] to really express what they need*" (P4) (discussed more in Section 8.4.2/CC1) so designers must rapidly and collaboratively fine-tune their solutions.

Even if customer goals are clear, tailoring is necessary because of requirements (e.g., branding or "*trademark*" (P2), 8.4.2/CC4) and hardware setup: "*it's important to tune the experience depending on whatever kind of motor they decide to put in*" (P5).

*"Depending on the outer design, what's given to us by the customer, we have to choose the direction of movement. For some applications, for some ideas, it's possible to move the surface directly perpendicular, away from the user, and other applications, you have to move the*

**Table 8.2:** Sub-theme summaries for the Collaboration (Co) theme.

Code	Sub-theme descriptor	Explanation
Co1	Internal roles are interdisciplinary	It takes a multidisciplinary team to create a haptic design.
Co2	Engineering support	Prototyping is necessary and often delegated to engineers.
Co3	External roles are international	Haptic design teams work with other stakeholders around the world.
Co4	Facilitators and advocates	Sales reps handle demos and fight for a deal.
Co5	Demos and documentation	Designers often show instead of telling.

*surface perpendicular towards the user, so the same actuation module could feel completely different” (P4).*

Meanwhile, individual differences of end-users further complicate matters: “*feeling right is...something that is very individual*” (P2). As P5 mentioned, volume controls can help end-users and adapt to unknowable context.

### [Theme Co] Collaboration: “Rally the ecosystem”

In this section, we describe the collaborative ecosystem. First, we provide an overview of group structure and interdisciplinary roles found in our participants’ groups (Sub-theme Co1), including a focus on the role of engineering (Co2). We then discuss the dispersion of stakeholders internationally and in different organizations (Co3), including a focus on the connecting role of sales representatives, and the use of demos and documentation (Co5). We distinguish the Collaboration theme (Section 8.4.2) from the Cultural Context theme (Section 8.4.2) by focusing on specific communication methods and roles rather than underlying values and widespread public consciousness.

All six participants indicated collaboration was an important part of their work and design process. Haptic designers are part of interdisciplinary, international teams, and do not make haptic experiences alone:

*“We basically have to rally the ecosystem...we have to go and find, y’know, somebody to supply the amplifier part, somebody to make the*

**Table 8.3:** Internal roles, the various descriptors used to label them, and descriptions. Roles were grouped and named by the authors based on participant-provided descriptors.

Role	Descriptors	Description
UX	User division (P6), User research (P5), Ergonomics (P6), Human factors (P1), Psychologist (P2,6)	The UX team does research: <i>facilitate prototypes, validate, communicate those results</i> (P5). Here we include psychologists and human factors roles because they conduct user research such as evaluation: <i>psychologists there who do usability tests</i> (P6), <i>study how effectively how users interact w/ goals</i> (P1).
Design	Design team (P5)	Related to UX but a separate and in some ways higher-level role. The design group ideates and communicates vision, developing a value proposition. Designers usually have a similar background to the UX group (P5).
Engineering	Tech manager (P3), Engineering (P3,5) Electronics, mechanics, tech team (P6)	Often a separate division, handling prototyping and implementation (P5). They might test components, do physical construction, take requirements from design, ergonomics, electronics, mechanics, etc. and generate required (haptic) feedback (P6). This can involve both hardware and software.

*motor, somebody who knows enough about the Android kernel...we have to be, kind of, renaissance men if you like*” (P5).

**Co1: “I’m not so much of a psychologist” – Internal roles are interdisciplinary.** Haptic design is interdisciplinary; hardware, software, psychology, and business all play a role. P5 describes his company’s job as “*rallying the ecosystem*”, finding diverse expertise and establishing a production chain. P6 describes different roles in her team, who work more closely together at different stages: *user [research], design, ergonomics, haptics, electronics, all come together* (P6). This is reflected by the diverse internal roles (Table 8.3), but also in the diverse work in single projects and individuals:

*“We do some mechanical integration work, we help [our international customers] with designing the electronics, we have reference designs there, we have a couple of reference effects, and then we ship the part back and they go on with further doing the software integration and designing the haptic effects.”* (P3)

Our participants worked in groups of various sizes. P2 worked with a student in a team of 2, while P5 describes several teams: design, UX, engineering, each with different responsibilities. This collaboration can be collocated or remote: P6 describes the different divisions in her company as being physically close together, while P3 has sales representatives (“*reps*”) overseas to help with external collaboration.

Especially in smaller groups, team members fill multiple roles. Sometimes this falls naturally into their background: “*I guess [phone vibrations are] similar to mechanical control design, except that it’s all virtual*” (P5). Otherwise, this lack of expertise leads reduces confidence: “*I don’t know, I’m not so much of a psychologist to really, to dare to say I can evaluate subjective responses to tactile feedback*” (P2).

**Co2: “Go through the technical levels” – Engineering support.** Larger groups are able to have more specialized individuals. Especially common was a dedicated engineering or technical support team, tasked with implementing prototypes for design and user research teams.

“*In our design research team we don’t do any internal prototyping, we rely on engineering resources to do all our prototyping*” (P5).

P5’s group says that neither the design team nor the UX team build prototypes, though the UX team facilitates and evaluates them. P1’s team is similar: *give qualitative feedback and ranges to the technicians* (P1). Engineering departments are sometimes *physically very close to other departments* (P6), presumably to interact with different divisions and groups. However, separating expertise can cause gulfs of collaboration, *e.g.*, when P3 tries to propose a deal:

“*If you try to go through the technical levels from a technology scout to a technical manager and then maybe to a senior manager, you usually get blocked with something, because nobody wants to take the risk or the blame*” (P3).

Those in engineering roles are risk-adverse: “[it’s] risky to suggest changes to their component” (P3). P3 says that to pitch to other companies, you need to reach

*“C-level people” like the CEO, or other business or manager types: “engineers look at it from a perspective well I’m going to take a risk if I change something in my design, and if it doesn’t work everybody’s going to blame me” (P3), technicians won’t give pushback if there is a problem (P1).*

**Co3: “Different divisions, different companies” – External roles are international.** Haptic designers also worked closely with external stakeholders like potential customers and manufacturers. Our designers have diverse suppliers, especially hardware suppliers, and often sell to manufacturers who then sell their own product to the end-user. Table 8.4 provides details on these external-facing roles.

*“Automotive is very much a tiered and compartmentalized manufacturing business, and so the person who makes the control surface is different than the person who makes the mounting for it...and those people often never talk to each other, and so for us it’s even worse than different divisions in a company, it’s different companies” (P5).*

Often these groups are distributed internationally. P5’s group, based in North America, received international demographics to research: *“here’s phone X from OEM Y and it’s targeted at Asian ladies from 15 to 30 years old”* (P5). P3, who has a headquarters in the North America and clients in Asia, describes *sales reps* as critical team members who can bridge language and cultural barriers.

**Co4: “Sales reps” – Facilitators and advocates.** P3 describes sales reps in-depth as key team members. Sales reps are trained locally at headquarters in North America, then are sent to the customers’ area, often in countries like Korea, Japan, China, and Taiwan which have large consumer electronics and gaming markets. It is important that they speak the local language and understand the local culture; they also facilitate demos and persuade customers to pursue business with the designer’s team. If a demo is sent to a company without a sales rep, customers may respond by shipping the device back and requesting assistance, but often don’t respond at all:

*“If we try to just ship them a part...in the best case they come back and say well it doesn’t work as we thought, can you help us?...in the*

**Table 8.4:** External roles, the various descriptors used to label them, and descriptions.

Role	Descriptors	Description
Connections	Sales rep, technology scout (P3)	Sales reps from haptic companies handle local expertise (language and culture), haptics expertise (they run demos), and can be advocates for products. Technology scouts from large companies talk to haptics companies to learn their technology.
Business	Business dev people, C-level people (P3)	Internal business development people are “ <i>here [in HQ]</i> ” (P3), while external business people make decisions; they’re who you need to persuade, rather than technology-focused roles.
Supply chain	Vendor, developer, manufacturer, OEM (P5), supplier (P4,6), content provider (P3)	Haptic designers are heavily embedded in a supply chain involving hardware and software manufacturers. Some manufacturers provide hardware (e.g., actuators) and software (e.g., Android API) to the haptician, others are the intended customer (phone or car manufacturers, software developers). It is unclear who creates haptic content in this ecosystem.

*worst case they don’t even contact us back and we never learn why they didn’t pursue an idea or an opportunity. It’s still a complicated setup to make haptics work, there’s lots of aspects that you have to take into account, and if you don’t do it properly, you’re going to be most likely very disappointed about what the outcome is” (P3).*

Big tech companies sometimes invert this from a push model (where the haptics company uses a sales rep) to a pull model with tech scouts (who reach out to haptics companies). Sometimes, companies fill this role without dedicated sales reps: P4 goes to customers regularly in confidential meetings, receiving specifications and working collocated with the customer to get their product to feel “*just right*”:

*“There is always [the] option, as we did with one of our customers, that we simply went into the lab for a day or two, and just worked on simulated button feel, together with the customer, to get the feel just right” (P4)*

In all cases, content can fall through the cracks. P3’s company provides tech-

nology, but “*the issue that we are having with uh, the content providers that need to get interested and believe in it...creating the haptic effects is something that we haven’t been involved in in a lot of detail in the past*” (P3). P5’s company does have a set of 150 effects, from which they select themes. The other participants all mention technology they develop, with content directly related to their hardware solution.

**Co5: “Your piezo demo, we love it” – Demos and documentation.** Demos are essential to showing both the value of a haptic experience and enabling two-way communication with the customer. They can clarify requirements and grab attention from clients: “*we’ll often get the OEMs who will say, well you showed us your piezo demo, and we love it, it feels great*” (P5). Demos can be conducted in-person (synchronously) at events like tech-days or one-on-one meetings: “*the customer either comes directly to us, we go towards our customers regularly, have our tech days, similar to automotive clinics*” (P4), or asynchronously, remotely shipped.

However, demos are complicated and need an experienced handler like a sales rep. Once set up, demos are often adjusted, but this is easier than the setup: “*From the moment the actuation module was working...it was just cranking up the maximum current or reducing the maximum current*” (P4).

Demos are often collected into groups. P5 describes downloading apps that use his technology and “*sticking those in [their] demo suite*”. P1 and P2 talk about collecting examples for inspiration and guidance early in design: it’s *quicker to go out and buy examples, like 15 or 16 appliances that had notably different feelings* (P1). P2 instructed his student to “*collect physical push buttons just to get in contact with all the diversity of stuff*”, and ended up with a “*button board*” to guide design. He also talks about company guidelines:

*“When I was at [a major automotive company] 3 years ago...they had this guideline book...they had guidelines on the design of physical widgets like sliders, physical sliders, push buttons, rotary things...they defined thresholds basically where these forces have certain thresholds and if you get over the threshold something is happening”* (P2).

Demo setups can thus be stored long term for internal documentation (button

board, guideline book), but they can also be ephemeral (tech days). In both cases, they can help to articulate the value, especially valuable when most people do not yet understand haptic technology.

#### **[Theme CC] Cultural Context: “A standard feature, in the future”**

Haptic technology has yet to fully penetrate the public consciousness. Participants reported major difficulty when working with both customers and users, including a limited understanding of what haptic technology is and how to work with it.

**Table 8.5:** Sub-theme summaries for the Cultural Context (CC) theme.

<b>Code</b>	<b>Sub-theme descriptor</b>	<b>Explanation</b>
<b>CC1</b>	Understanding requirements	Customers and designers have trouble articulating and understanding goals.
<b>CC2</b>	Evaluation	Getting experiences to feel right, usually with acceptance testing and deployment.
<b>CC3</b>	Secrecy and intellectual property	Haptic technology and sourced components are often cutting edge and secret.
<b>CC4</b>	UX and branding	Tactile experiences provide intangible benefits.
<b>CC5</b>	Overcoming risk and cost	Haptics are risky and expensive to include in a product.

*“People really don’t know what to do with [haptics] and I think within the haptics community we need to...continue to push it into the market, but once it’s there I think it’s going to add to the user experience and will be a standard feature in the future” (P3).*

Specifically mentioned were the difficulty in understanding customer requirements (CC1), and knowing how to appropriately evaluate haptic experiences (CC2). As a technological field, secrecy and intellectual property are important concerns for both designers and customers (CC3). Designers had ways to pitch the value proposition of haptics, often tied to UX and branding (CC4), but risk and cost of adopting the technology often make it a hard sell (CC5).

**CC1: “Hard to express what they need” – Understanding requirements.** Customers found it difficult to both understand and request their needs. Our participants focused on the end result because it gives them and their colleagues the ability to solve problems: *Don’t specify elements. Only give end product. Don’t tell how to restrict; can give hints* (P6). However, requested end-results are often vague or confusing, like “*good variable feel*” (P4):

*“The customer only came with a question, yeah, how [can the design] feel variable? Here it did not really describe how it should feel variable”* (P4).

To make these impressions concrete, customers initially give engineering parameters as their best guess. P4 in particular talks about his customers, who might point to a “*reference button which is available directly on the market, from companies like [company 1] or [company 2], and they say it has to feel exactly like this button*”, or request “*a surface acceleration of 10 to 20 G perpendicular and a travelling distance of .2-.3 mm*” (P4). This might have little relation to the final result, after the designers iterate with the customer: “*we ended with an acceleration of 2G and a travelling distance of .4 of a mm, so, due to the size of the module, simply the high accelerations were too high for a good variable feel*” (P4). The goal function of good variable feel was achieved, but the initial engineering-level specification was completely off.

Other participants showed this duality between high-level affective goals and low-level guesses. P1 especially used affective and psychological terms when considering design, such as semantic differential scales: *good/bad; gender (robust/delicate; size); intensity (sharp/dull; bright/dim, fast/slow); novelty* (P1). Haptic designers often connected low-level/high-level terms through iteration, or with their own way of representing features like quality: “[*audio click gives] quality, and, consistency across the whole dashboard*” (P5), *mass is big for quality..for the haptics, nice feedback w/ good snap gives a sense of quality* (P6).

**CC2: “It feels right” – Evaluation.** Our designers all evaluated their designs but demonstrated different methods of evaluation, consistent with our workshop survey (Section 8.5). P2 explicitly evaluates both low-level, pragmatic concerns (e.g.,

task accuracy and speed) and high-level affective concerns like feeling personally involved (with the AttrakDiff questionnaire [107], <http://attrakdiff.de>). P5’s user experience team conducts validation (but was unable to share details). Small-scale acceptance testing was employed by both P2 and P4: when iterating in-person with the customer, P4 kept iterating until the customer said it “*felt right*”; P2 only had himself and his student evaluate their designs in an academic context, despite indicating a desire to do a more thorough evaluation. P3’s group doesn’t create content, but indicated a desire to look into that and investigate it with studies.

Our participants expressed a clear desire for stronger evaluation, but reported mostly lightweight, *ad-hoc* acceptance testing. This is consistent with our workshop findings, which suggest little real-world or *in situ* evaluation. One reason may be that evaluation tools need to be adapted. P2 describes having to “*throw out*” terms on the AttrakDiff questionnaire that did not fit, and iterate on the questionnaire. However, deployment seems to be a natural way to see if the design is good enough, as the ultimate acceptance test. P5 described the most memorable moment of his software project being when his product had been deployed and used by a software development team. Seeing a haptic-enabled app available for download, and feeling it in context, was impressive:

*“I think the most memorable day was when we started downloading apps, and realized that, yes, in fact this does work, and not only does it work but it works pretty well for a variety of apps... we ended up just sticking those in our demo suite even though we had no relationship whatsoever to the developer. So, their app just worked, and it worked really well” (P5)*

**CC3: “Kept confidential” – Secrecy and intellectual property.** Sometimes the customer does not know what they want, but in other cases, they have important information they need to withhold. As mentioned in Section 8.4.2/Ex4, secrecy in haptics has major implications that inhibit design, especially given the verticality of haptic technology:

*“Somebody wants to design a completely new gaming controller for a gaming console, so they might just have some CAD drawings or they*

*might have something they don't want to share with us, so in that case we provide them an evaluation kit...we don't need to know what their design looks like, they can really work on it internally" (P3)*

P3's clients are able to receive an *evaluation kit* and create content with audio editors. P4 describes meetings with customers that preserve confidentiality: “*on these tech days it's usually only one customer and not that many suppliers at the same time, sometimes only the customer and us, to make sure our development is kept confidential*” (P4). Once technology of P4’s company is on the market, it is no longer secret - rivals can copy or reverse-engineer the devices, so there are many demonstrations to customers before release of the tech. P4 wants to show their technology to potential buyers, not competitors.

Secrecy can cause delays for software too. P5 delivers a modified Android kernel to his customers, who are software developers. However, they aren’t given an early release, and thus they “*always lag the market by two months at least, to get an update [for Android]...it's annoying because, you know, as soon as the OEMs get the source code they want to put it in their product right away*” (P5).

**CC4: “Articulating the value” – UX and branding.** Our participants were all passionate about haptic technology and its benefits. The value of haptics can be connected to better performance on various tasks: P2 tried to “*support people interacting bimanually to find out if they are more accurate in drag and drop tasks, [or] faster*”, but also whether they would “*feel more personally involved in the interaction somehow*” (P2). This latter goal, of user experience or rich feedback, was the primary value for haptics:

*“It's like having a touchscreen now on smartphones which nobody expects any other way anymore...sometimes pull out my old, uh, tom-tom navigation device in my car, and that one didn't have a touch screen back then (P3 laughs) so I tap on that one [expecting it to respond to touch input], and so it's the same thing with haptics, at some point it's just going to expect that you get some nice haptic feedback, but getting there is still a couple of years out” (P3)*

Of course, “*a couple years out*” has gone by as of the time of this writing; and indeed, haptic feedback is now normal and expected in many touchscreen products, although quality and range continue to be challenging.

As mentioned in Table 8.4.2, tailoring and customization are important for each implementation. This is also true for value: differentiable sensations are important to help distinguish overall user experience and provide branding. *look for alarms that were different; branding effective, but different.* (P1). Companies and products need to have both a cohesive and differentiable feel. P2’s company “*guideline book*”, which defined force profiles for buttons, was helpful to “*coin a trademark*” (P2).

*“[We] provide differentiated tactile experiences to our customers, who are major mobile phone manufacturers. Since Android is pretty generic across the board, um, they like to have custom themes, which are sets of these 150 effects”* (P5).

With software libraries, themes are essential to the haptic design process. This desire for consistent output has a tension with customization and fine-tuning: “*it’s also important to tune the experience depending on whatever kind of motor they decide to put in*” (P5). This is part of the the persuasive capability of touch: *improve comfort and differentiate based on branding* (P6).

**CC5: “A tough sell” – Overcoming risk and cost.** Despite its value, haptic technology is a risky, costly feature to add. Providing improved user experience requires “*high-definition haptics*”, not “*some rumble feedback that has been around a long time*” (P3). This often means “*going up in fidelity*” from a “*cheap, poor quality motor*” (P5). P5’s company argues that “*the end-user is going to prefer this quality of experience*” with improved hardware, like a piezo actuator.

*“[If we were to perform this project again,] I think we would spend a bit more time up front articulating the value, the specific value prop, of individual features”* (P5).

P5 notes the challenge of convincing non-end-users to buy or deploy their technology: “[our company] has the unique challenge that our customers are not the

*people who use our products*" (P5). Since the main benefit is to the end-user's experience, it is challenging to connect to the bottom line, especially compared to other haptics components. According to P3, designers need to

*"...get up to the decision-making level and more on the business side...[business roles] know nothing about technology, I mean, they don't care, but we are trying to demo parts to them, present business cases to them, and show them what they can do in order to gain market share, or increase their retail price when they add our technology"* (P3).

P3 further commented on lack of knowledge among decision makers about haptics compared to other technologies.

*"Let's assume we were to work on a completely different product like memory chips, so everybody understands what this is for, what it can do, and you probably have a memory chip that is faster or, whatever, smaller. Now for haptics, this approach is kind of difficult because the technology scouts themselves they kind of understand what this is for, but how it's going to add value to their device, and how much they can increase the retail price, or if they can increase it at all, or gain market share, that's completely open"* (P3).

Newer technologies are hard to explain: "[*Gesture-based haptic feedback is*] a much more complex task to design, and also to explain, to the OEM" (P5). It can also make persuading a customer difficult. P3 finds that "*there's always discussions on the cost*", and proposes "*alternative business models*" to no avail. Cost concerns are perfectly captured by P5:

*"[The customer says,] 'we love [the piezo demo], it feels great, we're building this phone that has a 10 cent eccentric mass motor in it, can you make it feel the same?' The answer of course is no"* (P5).

P5 notes that "*cost pressures are pretty extreme*". Mobile phones in the US cost "\$199 on contract, that's sort of a fixed price and you can add more features to the phone, but that just reduces the profit margin, right?", so "*the addition of haptic*

*feedback technology...can be a tough sell*” (P5). Haptic technology is especially risky because of previously discussed challenges: it involves separate risk-adverse engineering divisions, and changes to the “*guts*” of a product. Designers need to set up complicated demos to persuade decision makers of the value of improved user experience: *if only compete on cost; then this is tough* (P1). Of course, “*it's hard to get through to the right level*”, like “*C-level kind of persons, so, talking to the CTO of Sony, those kinds of people*” (P3). The combination of high-risk, increased cost, and indirect connection to the bottom line make haptics a very tough sell indeed.

## **8.5 Part II: Validating the Findings in a Follow-Up Workshop**

The second part of our study was conducted during a workshop on haptic experience design at World Haptics 2015, the largest academic haptics conference, held that year in Chicago, IL, USA (<http://haptics2015.org>).


### **8.5.1 Method**

The workshop was organized by two of the authors to initiate a conversation between researchers and industry practitioners about HaXD status and needs, and elicit feedback on our findings in the interviews conducted in the first part of the study.

### **Participants**

Over thirty people participated in the workshop brainstorm session and the panel discussion. Sixteen workshop participants responded to a questionnaire at the close of the workshop, which requested details about the respondents’ roles, tools, and techniques.

Of 16 questionnaire respondents, 5 self-reported as working in industry, and the other 11 as members of academia (one reported also working at “other: research institute”). For roles, 4 reported as graduate students, 4 as developers, 2 as designers, 2 as a combination of designer and developer, 2 as researchers, 1 as a business person (“product integration/commercialisation”), and 1 did not report.

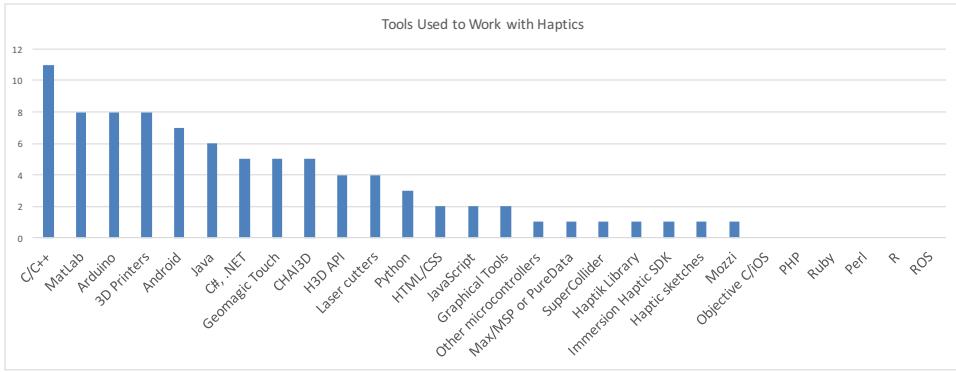

**Figure 8.2:** Responses for tools used in haptic design (N=16, “*check all that apply*”).

### Procedure

Four leading haptic design experts – two from industry, one academic and one with a foot in both worlds – gave short *presentations* on topics concerning both engineering and UX. These presentations set the stage for a hands-on *brainstorming session*, culminating in an audience-participation *panel discussion* about challenges and ideas for HaXD.

Brainstorming occurred in 6 groups of approximately 6-7 members. Each group was asked to identify challenges faced by their members and then brainstorm solutions. Brainstormed ideas informed the panel discussion, which was led by the four haptic design experts but included all workshop participants. A questionnaire was distributed to all participants at the end of the workshop. The questionnaire was supplemented with researcher notes written during and after the workshop, and the participant’s sheets used for brainstorming, which were collected afterwards.

### 8.5.2 Results

In the following, we report results from the questionnaire’s quantitative and qualitative (open-ended) questions, along with findings from notes and brainstorming sheets.

### **Quantitative Data (survey): Tools, Background, Groupwork**


Respondents reported a wide variety of hardware and software tools used to work with haptics (Figure 8.2). Most used were popular general or technical programming languages like C/C++, Matlab, Java, and hardware hacking tools like Arduino and 3D printers. Force-feedback APIs for consumer hardware (Geomagic Touch CHAI3D, H3D) were moderately used. Very few respondents reported using scripting or web tools, like Python, HTML/CSS, JavaScript, or more specialized tools. This combination suggests needs for performance, technical or scientific software libraries, and an ability to access and control prototyping hardware at a fine-grained level; in contrast to many other media design domains, web tools use is notably low. The latter is not particularly surprising for design that is, by itself, not primarily visual, and often comes with tight timing requirements.

Evaluation techniques were also varied (Figure 8.3); many respondents listed several. Most common were methods deployed in-lab or in-house (piloting, laboratory studies). Less common but still used were more externally valid evaluations (*in situ* studies and real-world deployment). Quantitative and qualitative methods were reported with equal frequency: 8 respondents reported using both, *i.e.*, a mixed-methods approach, and 4 respondents did not report either, but did report conducting in-lab, *in situ*, or real-world evaluation.


Group size reports suggested that hapticians work in groups with varying sizes (Figure 8.4). Few work in large groups; just one person (the designer / developer for a research institution) reported a group size of 21-50. No one reported a group of size 11-20, and most reported working with 3-5 others. Five participants reported varying group sizes (combinations of 1, 2, and 3-5 people). Because our question did not precisely define the meaning of a “group,” we note the possibility of interpreting it with differing degrees of collaborative closeness, but assume that it was generally regarded as meaning the sharing community within one’s organization.

### **Qualitative Data (survey & brainstorming): Consistency, Quality, Value**

Qualitative responses from the survey’s first open-ended question, which asked for the largest challenges participants faced in haptic experience design, highlighted

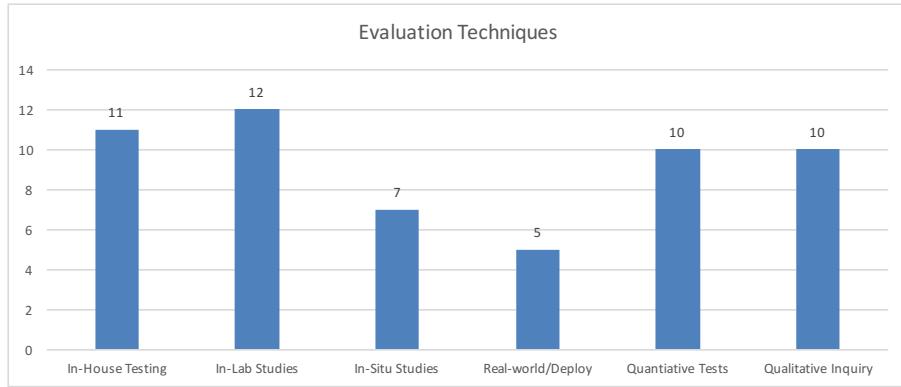

**Figure 8.3:** Responses for evaluation techniques used (N=16, “check all that apply”).

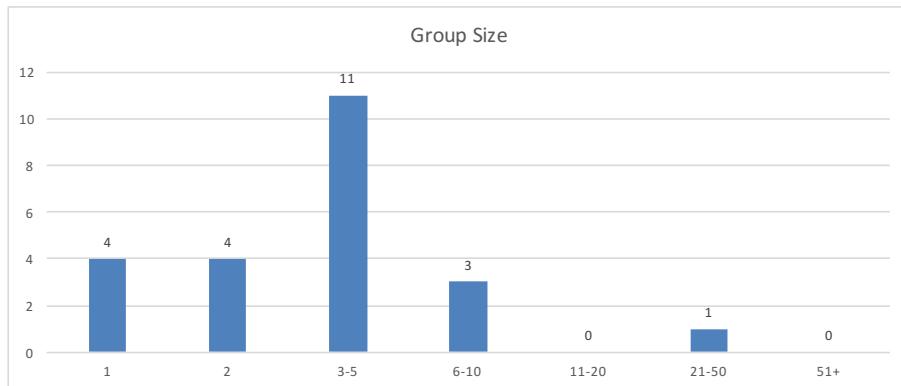

**Figure 8.4:** Reported group size for projects (N=16, “check all that apply”).

three themes. Each is a challenge for haptic design:

1. **Universal design:** “universal experience”, “adopting wide spectrum of users”, “optimal and consistent delivery of haptic cues to large number of people”, “users variations in terms of subjective analysis”, “common haptic experiences, any person/any device”, “the spectrum of perception”.
2. **Evaluating quality:** “what is ‘good enough’?”, “modeling haptic quality of experience”, “appropriate fidelity force feedback”, “optimal and consistent delivery of haptic cues...”.

3. **Value:** “*getting people to realise the benefits of good haptics. Finding new ways to use hi-fidelity (wide bandwidth) haptic feedback to enhance UX*”, “*Bringing haptics to mainstream/consumer electronics*”, “*merging the technologies, make safety and pleasure experiences*”, “*convincing it’s useful*”.

Other responses include emotion (“*transfer emotion through haptics*”) and language (“*haptic language; no simplicity in generating new sensations*”). In the second open-ended question, which asked what participants would like to see in a design tool to overcome these challenges, respondents suggested ways of handling variability or definability, such as automatic configuration:

“*mapping*”, “*automatic evaluation of systems and actuators*”, “*qualification [sic] of haptic perception*”, “*autoconfiguration, calibration and prediction of results with the users*”, “*accessible to all, supported by standards*”, “*autoconfigure depends that perception [sic]*”, “*bigger testing pool*”.

Many of the challenges identified during brainstorming mirrored questionnaire results. Three groups (G1,2,6) focused on the *value* of haptics: what is the point or benefit in certain situations; as well as how to market that advantage to either a client or end-user. One group (G3) tackled the problem of *examples of good design*, including hardware and software architecture, suggesting a repository like GitHub or software engineering patterns. Three groups (G4-6) talked about *meaning* – and subjectivity therein, including the possibility of a shared or useful language.

The follow-up discussion developed these challenges further. Emergent themes were that haptics is not well marketed and that touch is taken for granted. The word “haptic” might be too jargony or poorly understood; perhaps other terms like “tactile effect” or “physical effect” could be more useful. Curated examples and an on-line repository were offered as valuable goals.

## 8.6 Discussion

As a first step in further exploring the findings from our two-part study, we examine in more detail the critical activities practiced by haptic designers. This inventory confirms that HaXD is a field of design with familiar processes, but also one that

is developing its own identity distinct from general UX design. We then identify major challenges encountered in HaXD that are unique to or exaggerated when the experiences being designed are haptic. We conclude with several concrete recommendations to support HaXD in the future and a vision for what this might look like.

We note that our interview results were generally applicable to professional haptic design in 2012. Based on recent interactions with designers in comparable roles (including those in the workshop), we believe our findings continue to hold at the time of writing (2016) with three caveats: (1) hardware has improved and become more diverse, (2) haptic feedback is more prevalent and more expected in the consumer culture, and (3) in a limited number of sub-disciplines, such as gaming environments and movie special effects editing, specialized tools have begun to appear to solve very specific designer problems where the cost/benefit equation merits their use. However, the design pressures shaping practices and tools themselves have changed little over that time, as confirmed by our findings from the more recent workshop (2015, Section 8.5).

### 8.6.1 Activities of Haptic Design

Based on our observations, we report the following activities that haptic designers conduct, all familiar to designers in other fields.

**Develop and communicate vision.** Designers must articulate the value that their designs can bring to both end-users and customers. They must communicate value to their team and others and, crucially, they must *persuade external stakeholders* that their product will contribute to the bottom line. To do this, they must *collect, run, and tune demos*, a critical part of the communicative toolkit for haptic designers.

**Prepare for design.** Designers need to *divine requirements* from customers, which customers often do not understand themselves. Designers also *gather examples*, both to provide inspiration and facilitate communication. Designers need ways to capture, modify, manage, find, use, and share examples and ideas, both ones they develop themselves and ones they seek out for inspiration.

**Iteratively develop, communicate and evaluate multiple concepts.** Our participants needed to iterate, often with their clients' and users' feedback to find the best designs. *Design thinking* and *user-centered design* are both important to apply to haptics, especially because requirements are difficult to communicate and understand. Additionally, designers must either *communicate with engineering*, articulating requirements to receive new physical prototypes, or *have engineering skills* to create demos and prototypes themselves. During iteration, hapticians must also *evaluate designs and collect feedback*, both with informal feedback from colleagues, and formal studies, typically run by a UX/research division. However, this practice is currently constrained both by industrial concerns (confidentiality, cost, end-user access) and the hard-to-share nature of haptic technology itself.

**Interface with research.** Hapticians need to *hand off* prototypes or stimuli to their UX or research division, and communicate study goals. They must also *monitor the academic research* in this rapidly changing field, interpreting data emanating from multiple sources: marketing research, psychophysics studies on hardware and stimuli, and interaction design of applications. Alternatively, as with engineering, they might *plan, run, and analyze studies* directly.

**Manage IP.** Designers must be sensitive about intellectual property, both that of their company's technology, and of the many companies and divisions they interact with. This can involve deliberately *exploiting or avoiding particular design approaches*; and has heavy implications for *confidentiality and privacy* of their overall process.

### 8.6.2 Challenges for Haptic Experience Design

From our interview and the subsequent workshop findings, we identify several challenges facing designers that are unique to HaXD or are exacerbated when working with haptics compared to non-haptic UX design.

### **Context is largely unknowable**

Haptic experiences are multimodal and holistic, interacting closely with physical hardware, grip, and orientation. When our participants knew the haptic experience’s physical context, like the dashboard of a car, they were able to use tricks to improve designs and circumvent constraints. However, when context is unknown, *e.g.*, due to confidentiality, diverse environments, applications and means of handling an interface, hapticians can be quite hampered in their attempts to create consistent experiences.

### **Applications and individuals vary a lot**

There is no “one size fits all” in haptic experience design. Each customer’s design challenge has new properties. Hapticians must continually adapt their practice to changing conditions [235], and cannot simply design once and deploy. Companies use haptic sensations to brand their products, and individuals might want to customize effects for their preferences: users perceive, understand, and respond affectively in different ways to a haptic experience.

### **Demos are complex, costly, and crucial**

Essential in eliciting requirements, communicating vision, and persuading customers, demos are hard to manage. With many moving parts and ways to fail, demos often require a dedicated assistant; latency is a special challenge for early prototypes, and can defeat carefully synchronized multimodal effects. Because HaXD takes place over global distances, and across organizations and disciplinary boundaries, it is often difficult to have a handler onsite, send proprietary hardware, or divulge enough detail for clients to run them on their own.

### **Iteration is painful**

Every change to a haptic experience results in a change to the “guts”, including reinforcing modalities and physical setup; technical constraints are tight and unyielding. Hence, even early ‘sketching’ iterations to understand requirements can be slow and difficult, limiting playful exploration of a design space and disrupting communication with customers and users.

### **Barriers to interdisciplinary collaboration are significant**

Hapticians either need to fill many roles or work in groups that include hardware, software, design, business, and psychology. Furthermore, haptic design teams must interact with many external stakeholders stratified across different international companies, encouraging remote, asynchronous collaboration with physical, synchronous designs.

### **Cost/benefit ratio is not obvious or easily quantifiable**

The benefits of haptic technology are often intangible: better user experience, usability, branding, and sense of quality. Product manufacturers (phones, cars) must be convinced of the contribution to the bottom line, and are all too aware that improving haptics comes with increased cost and risk. Haptic design teams reaching out to customers through risk-adverse engineering avenues face additional push-back.

### **Evaluation methods are limited and often not practical**

Quality of experience, usability, and branding are difficult to study with physical systems. Although many of our participants mentioned evaluation methods as important, time and cost constraints limited it in practice; acceptance testing seemed to be the primary tool. Hapticians use both qualitative and quantitative methods, but *in-situ* evaluations are difficult to come by, suggesting that haptic designers primarily conduct evaluations in-lab and do practical deployments.

### **8.6.3 Recommendations for Haptic Experience Design**

From these challenges, we identified three main directions for development which could lead to better haptic design in the future.

#### **Develop adaptable haptic interfaces**

Many of the challenges facing haptic designers are a result of uncertainty or variability in physical context. One solution is to let physical haptic interfaces adapt their context, either automatically or with help from a designer, customer, or end-user.

One automatic approach to mitigate variable physical context is to employ *closed loop control*: adapt actuator output to desired levels with sensors. For example, a microphone could sense the external vibrations of a VT actuator, whose output can then be modified to overcome the effect of external factors like material, orientation, and grip and achieve a specified frequency, amplitude and responsiveness. This might be deployed in products during use, or once during manufacturing as quality assurance to adapt for different product materials.

Another approach is to let the customer or user adapt the experience through *customization*; this can handle both physical context and individual differences in perception and preference. This might be a simple volume control, or a powerful menu of settings. Customizable infrastructures that support fine-tuning can also help speed iteration once demos or even fully-fledged applications are set up, letting designers and customers try variations of a haptic experience easily.

Finally, *efficient calibration* of demos, using either sensors or a person's input, could improve collaboration with easier demo or product setup. Devices that are self-assembled or operable by non-experts require an easy way to troubleshoot and ensure correct rendering. This could engage the DIY community to explore haptic technology, and improve efficacy of sending evaluation kits to potential customers.

### **Exploit virtualization**

The unique problems of haptic design stem from the combination of physicality and the software engineering necessary to integrate the hardware into a solution. Some of these challenges may be offloaded through virtualization: certain types of iterations or tests can be done more efficiently with software simulations or crowdsourced evaluation – once this capability exists.

*Proxies* are one way to virtualize complex physical setups, *e.g.*, using low-fidelity feedback like phone vibrations when high-fidelity feedback is unavailable [234]. Low-fidelity previsualization of haptic sensations (or “pre-feels”) [233] can improve iteration speed, by allowing the designer to experience an approximation of an iteration before committing resources to building it, and/or to compare with a reference starting point. Visual or audio proxies can easily exploit existing infrastructure.

*Software simulations* of hardware can explore how different electronic or mechanical components could be rearranged to preserve or enhance dynamics, reducing physical prototyping. Even more advanced might be the use of simulations to develop “perceptually transparent” sensations [220], allowing actuators or other components to be swapped in and out if upgrades or cheaper models are available, while software components are automatically updated to achieve a consistent end result. This virtualization technique dovetails nicely with closed-loop adaptable interfaces by establishing models and correcting for errors.

Software has enabled immediate, efficient deployment of visual and audio stimuli through the Internet. Analogous *infrastructure* could help haptic technology catch up to other modalities more quickly, *e.g.*, developing modular systems, data structures and protocols, and large on-line repositories of examples. *Broadcast* haptics remains an important and unrealized goal, which can help both with potential customers and end-user experiences [183].

### **Establish richer conceptual infrastructure**

Several measures can help to address communication and cultural barriers to haptic design.

*Outreach and education* might be able to improve perceived value of haptics and facilitate interdisciplinary communication. Public haptic portfolios, accessible haptics education [134] like online tutorials, support for DIY and maker cultures, and events like haptic hackathons [172] will help to establish haptics as a known term, spread the word about its value, but more importantly help more people join the conversation in which we will articulate the value in touch-based technology. It will help provide different stakeholders with common reference points, language, and understanding, both lowering the bar to conduct haptic design as a team member, and by providing a voice to external stakeholders.

A *haptic design language* is needed for multidisciplinary team member and client communication (C6). A *design language*, like Google’s Material Design (<https://material.google.com>), is a defined set of aesthetic and interactive rules to ensure a consistent look-and-feel. Much like graphic design, where non-experts might be aware of some concepts (symmetry, contrast, hot/cool colours) while ex-

perts know much more (colour combinations, concept of weighting in a visual design), a shared, objective and teachable language will help teams communicate across divisions and with clients, users, and customers. It remains to be seen whether this will be a formal lexicon of terms, or ideas that emerge organically; either way, we suggest paying careful attention to the language used when doing haptic design, and to share the language alongside the sensations and their components.

Haptic designers have limited access to *evaluation techniques* that are taken for granted in other modalities, especially *in situ* tools. Promising ways of mitigating this handicap is application of remote analytics to haptic design, *e.g.*, logging, machine learning, or qualitative contextual inquiry. This may require development of new batteries of haptics-suitable tests, especially ones which target its less objective benefits (*e.g.*, quality and branding), which might in turn help to study perceived value and risk.

#### 8.6.4 Future of Haptic Design

Hapticians follow an observable, defined process. They collect requirements, develop multiple concepts, and iterate until they arrive at a final experience, which is then evaluated with varying amounts of rigour. We saw evidence of libraries, examples, and our participants' own craft and experience; we also saw a diverse, international, collaborative ecosystem. Some deliberately applied user-centered design techniques.

However, we also see that haptics "*might be 30 years behind graphics*" (P3), or at least "*really new*", *i.e.*, in an early stage of development. We believe that HaXD can draw from both newer fields like experience and interaction design, as well as more established ones like graphic design. How might it look?

Haptic designers might work in teams, interacting with other relevant units. From our research, it is likely that haptic designers will need to communicate with everyone from mechanical engineers and software developers to people conducting business and user research. As with graphic design schools, there may be formal education available for haptic designers. However, as haptic technology needs to be tailored to each specific problem, these will likely be generalized professional

programs that train diverse skills, or will focus on certain sub-categories of haptic technologies, *e.g.*, tactile artists or animators [233], friction designers, or 3DOF force-feedback developers. As hardware becomes more affordable, we also expect the recent Maker movement will encourage hobbyists and artists to explore haptic technology and push its limits.

As with other emerging media, such as the web browser wars of the 90s, standardization of HTML/CSS, and Blu-Ray versus HD DVD, we expect diverse file formats and infrastructures to emerge and then coalesce. Given the diversity of haptic technologies and experiences, we expect these to be centered around *paradigms*, mental models of how to work with a haptic experience. For example, haptic icons [166] are one paradigm: display-only, temporal and meaningful entities rendered on a single body location. These might be designed, distributed, and experienced similarly to audio files. Tactile animations [233] are another: generalized spatio-temporal entities that can be rendered continuously on different grids. Multi-DOF force-feedback displays are often programmed with a third paradigm: a virtual environment and a single manipulator; this is most analogous to 3D virtual worlds. Paradigms can be applied to multiple devices in a class (*e.g.*, tactile animations on grid displays), or multiple paradigms might apply to a single device (a Haptuator [279]) can display a haptic icon (temporal only), or it can produce a directional force [57] (spatio-temporal).

We expect design dimensions to be further developed, and eventually encapsulated into best practices, just as alignment, contrast, and weighting are used for graphic design. Other design languages, like musical notation, will facilitate recording and communication amongst experts. Meanwhile, more developed aesthetic theories, like musical or colour theory, will help guide people to effective, pleasing, differentiable haptic designs. Intellectual property law will need to be adapted – much like a logo can be trademarked, how might a certain button click? Whether a haptic icon set should be protected, and how to set an appropriate level for burden of proof, remain open questions. We hope that these questions and more will be answered during this exciting time for one of our most essential senses.

## **8.7 Conclusion**

In this paper, we provide a first picture of how haptic experience design (HaXD) is being practiced in industry. We report findings from interviews with six haptic experience designers, finding observations about designer process and themes about the holistic nature of haptic experiences and the collaborative ecosystem and cultural context of our participants. We supplement this with broad follow-up data from a recent workshop at a major haptics conference.

We identified the various activities haptic designers practice, similar to other fields of designer. We also note specific challenges facing designers who work with haptics, and recommend both high-level priorities and low-level tactics for conquering those challenges. This contribution is a first step in understanding HaXD outside of the research lab; we look forward to when physical, interactive technology can be designed with creativity, passion, and panache.

## **8.8 Acknowledgements**

We deeply thank our designer participants for their time and dedication, Gordon Minaker for helping with survey distribution and workshop administration, and Hasti Seifi for helping to conduct the workshop brainstorming. More broadly, we thank generations of our own lab’s designers and our collaborators for the foundations they laid under these findings and ideas. This research was supported by the Natural Sciences and Engineering Research Council of Canada (NSERC), the GRAND Network of Centres of Excellence, and the University of British Columbia’s 4YF fellowship program. The user study was conducted under UBC Ethics certificates #B01-0470 and #H13-01620.

# **Chapter 9**

# **Conclusion**

In this dissertation, we explored haptic experience design (HaXD), looking at its process to inform how to design, build, and evaluate HaXD support tools. In this chapter, we summarize our research contributions from the preceding chapters and provide final thoughts about the HaXD process and support tools. In particular, we discuss process, including challenges and strategies haptic designers can use to overcome those challenges, and findings with specific implications for designing and developing software tools to support HaXD. We conclude with directions for future work and final remarks on supporting HaXD.

Only so much can be done in the scope of a PhD dissertation, and so we note that this is not a complete description of HaXD. Our case study approach gave us a balance of depth, breadth, and grounded information; our selections for each information source necessarily shape our findings.

## **9.1 Summary of Research Findings**

We summarize our more specific findings organized by approach: depth, breadth, and grounded capstone.

### **9.1.1 Depth: Vibrotactile Design Tool Case Studies**

Through Chapters 3-5 we designed, built, and studied a trio of HaXD support tools. Each case study investigated a different set of design concepts with varying user

	Create	Create	Create
	Gather	Evaluate	Gather
<b>Who</b>	Haptic Designer-Proxies (researchers with some haptics experience)	Animators (visual designers who would be haptic designers)	End-users (people with and without basic media editor experience)
<b>What</b>	Dual Haptuators	Spatial Vibrotactile Pad	Wrist-worn C2 Actuator
<b>How</b>	Real-time, collaborative parameter control	Direct space/time manipulation of animation object	Example-based interaction techniques, logged user actions
<b>Discovery</b>	Good for ad-hoc exploration, collaboration; bad for refinement	Real-time manipulation valuable; animators drew from examples	Open examples directly facilitate design and indirectly scaffold learning for VT design
<b>Platform</b>	Mobile (Android)	Desktop (Python)	Web (JavaScript)

**Figure 9.1:** Vibrotactile design case studies. Each studied an aspect of vibrotactile design with a varied set of users, devices, platforms, and foci.

populations, VT devices, and design challenges (Figure 9.1). We include HapTurk (Chapter 6), a VT *sharing* technique, in this discussion. We began with an initial hypothesis: that real-time feedback and collaboration could improve the haptic design process. Through our tools, this hypothesis was confirmed, elaborated, and refined.

**Initial Exploration: The Haptic Instrument (Chapter 3)** – In Study 1, the Haptic Instrument, we focus on real-time, rapid design of VT sensations with a first look into themes of real-time design and collaboration. Our implemented haptic instrument, mHIVE, showed us that rapid exploration was possible with real-time feedback, demonstrated value in informal, collocated collaboration, and gave evidence that showing rather than telling about haptic sensations could circumvent an impoverished language (*e.g.*, what do you think of *that*). mHIVE also showed us

that there are distinct roles to be played by different tools: mHIVE was successful for early *sketching*, but did not enable *refining* and had a learning curve.

**Direct Manipulation Pipeline: Tactile Animation (Chapter 4)** – Our second tool, Mango, followed up on these themes with a focus on implementation. We established a rendering pipeline for both design and playback. A direct-manipulation metaphor let participants both *sketch* in real-time and *refine* their designs. In addition, an animation paradigm enabled our visual animators to transfer their skills to tactile animation. Our evaluation study found evidence for reuse: repetition played a large role in tactile animations, and participants again drew inspiration from their experience or external examples (*e.g.*, a YouTube video of a heartbeat) - and noted the engagement of multimodal design, *e.g.*, designing for an audio clip. These both informed Macaron.

**Example Use and Analytics: Macaron (Chapter 5)** – With our third tool, Macaron, we were able to easily implement the system (drawing from Mango’s architecture), allowing us to study our participants’ process more closely. We found a number of concrete recommendations for HaXD tools, and confirmed the value of *browsing* examples: we found different strategies for using examples in the initial design process, and open or visualized examples helped designers learn how to conduct VT design. Macaron also helped us find our more nuanced understanding of our initial hypotheses. Real-time feedback is useful as a preview, to get the right frequency, amplitude, or timing. However, participants would also step back to feel the entire design in its entirety, something that can be done

**Feedback at Scale: HapTurk (Chapter 6)** – While not an iterative design tool study, HapTurk is a focused investigation of a VT design technique for collecting large-scale feedback on VT icons. HapTurk (Chapter 6) allowed us to study a specific piece of collaboration: how to widely transmit designs. We found that VT icons could be *shared* over MTurk to elicit large-scale feedback from remote users. We also found affective qualities of VT icons could be communicated through proxies, suggesting we can express haptic ideas in different modalities.

### 9.1.2 Breadth: Focused Haptic Design Projects

Together, mHIVE, Mango, and Macaron have informed us on both important features and roles for design tools, given us insight into implementation and evaluation, and helped us study HaXD as a process. HapTurk extended this investigation to collaboration. To broaden our understanding of haptic design, we undertook several more focused haptic design projects to look at different activities, application areas, and haptic modalities. In **Chapter 7**, we described several smaller projects that gave opportunities for practicing haptic design and exploring other types of haptic feedback:

***FeelCraft (Section 7.1)*** – a plug-in architecture that augments media with customizable spatial VT effects. FeelCraft explored existing infrastructure for haptic media, and for designing VT effects for a popular video game, MineCraft.

***Feel Messenger (Section 7.2)*** – a chat program augmented with expressive, customizable VT effects using commodity hardware and APIs.

***RoughSketch (Section 7.3)*** – a painting application for the TPad Phone, a variable-friction mobile device, for the World Haptics 2015 Student Innovation Challenge. Variable friction is a significant contrast to VT sensations as it is intrinsically connected to input: no sensation can be felt without active movement by the user.

***HandsOn (Section 7.4)*** – a conceptual model for creative education software using low-cost, DIY haptic hardware, giving us an understanding of how to work with 1-degree of freedom force feedback and an educational context.

***CuddleBit (Section 7.5)*** – a project inspired by the Haptic Creature [42, 282, 283] and CuddleBot project [2]. We use small, breathing robots to explore the display of emotion, and extend our findings from VT design tools into new tools for this modality: Voodle and MacaronBit.

### 9.1.3 Ground: Data from Hapticians

In **Chapter 8**, we complement our design-based inquiry with data from haptic experience designers, or as we suggest calling them, hapticians. Haptic designers are difficult to access as they are both rare and often work in proprietary contexts, with limited ability to speak about their process. To include hapticians' perspectives

without severely hindering our design tool development, we conducted a grounded theory analysis of interviews with six haptic designers. We characterized cross-cutting themes at three levels of scope: 1) the holistic nature of haptic experiences; 2) the collaborative ecosystem of haptic designers and related stakeholders; and 3) the larger cultural context of haptics in the public consciousness. We augmented these interview findings with those from a workshop we organized at a major international haptics conference, World Haptics 2015, which let us connect with designers more widely.

Our findings showed that haptic designers follow a general user-experience design process, but with added challenges because they work with haptics. We articulated these challenges, gave concrete recommendations on how to make progress on them, and finally gave a vision of haptic experience design as it might be practiced in the near future. These results overlap with our findings from our design-based inquiry: some conclusions are confirmed, with similar themes emerging both from expert hapticians and our design studies; others emerged from only one source.

## 9.2 HaXD Process: Requirements for Tools

In this section, we examine our findings about the HaXD process. In Chapter 8, we saw that haptic designers follow a familiar design process. However, we also saw that there are unique challenges that differentiate HaXD from other modalities of design, which are confirmed by our work on HaXD support tools and our focused design projects.

We begin by discussing four design activities that occur generally in design, but need to be explicitly supported for *sketch*, *refine*, HaXD: *browse*, *share*. Then, we comment on some approaches for handling the diverse devices and modalities employed by haptic technology. After, we discuss some techniques to imbue haptic experiences with meaning and realism. Finally, we talk about the importance of customization and how to support it.

### 9.2.1 Contextual Activities of Design: Sketch, Refine, Browse, Share

In our first exploration of HaXD support tools, the Haptic Instrument (Chapter 3), we found evidence that mHIVE was able to support exploration and sketches of haptic ideas, but not refinement into final designs. mHIVE was also able to support collaboration in certain ways. In our followup studies, we explored these activities that draw upon a designer’s context, eventually arriving at four that we found are valuable when thinking about tool design: browsing examples, sketching new ideas, refining existing ideas, and sharing ideas with others (Table 9.1). These activities can occur at any point in the design process, and we do not propose them as an exhaustive list; for example, “framing” [235, 271] could be claimed as an activity for design which may overlap with activities like *browsing* and *sketching*. We focus on their utility in motivating features and specific tools to aid haptic experience designers.

Activity	Important Features to Support for HaXD
Sketch	Abstractability and ambiguity Rapid iteration
Refine	Mature design tools Adaptable interfaces
Browse	Representations of single sensations Overviews, search, and skimming
Share	Capturing ideas Remotely or asynchronously share haptics

**Table 9.1:** Four design activities that are supported in other fields of design, but need explicit support in HaXD.

#### Sketch

Sketching allows people to form abstracted, partial views of a problem or design, iterate very rapidly and explore concepts. The generalized notion of sketching can support other activities: sketches are a notation that can be shared, and provide a vehicle for annotating and iterating on designs. Here, we use *sketch* in contrast with *refine*, to refer to embodied exploration, concept generation, and initial design.

Early in our exploration, we found that our Haptic Instrument, mHIVE, ex-

celled for exploring a design space but faltered for refining sensations. A real-time direct manipulation model in Tactile Animation facilitated both. In Macaron, we observed different levels of exploration and refinement, discovering a pattern of focused adjustment and repeated reflection [235], where the designers stepped back to feel their design in its entirety, and zoomed in to adjust parts in detail. We find this is a repeated pattern, where participants iteratively zoom in and out to different levels. The mixture of focus also depended on the stage of design - early on, exploration and execution take a more prominent role, while later refinement has smaller adjustments and more reflection. We have found this distinction useful when developing suites of tools, most explicitly when supporting design of CuddleBit behaviours: Voodle is a free-form *sketching* tool, which can hand off to MacaronBit for *refinement*. Future work remains to be done to establish whether there are discrete levels of focus, or if they lie along a continuum. In general, we've found two main features important for supporting Sketching: *abstraction and ambiguity*, and *rapid iteration*.

**Abstractability and ambiguity** – Haptics suffers from a dearth of notation. Sketching of physical devices or interfaces is well supported, with paper and pencil and innumerable software assists. Sketching *motion*, and in particular showing what is or might be felt in, say, a vibrotactile experience, is trickier. While we can sketch a visual interface and look at it, it is much harder to sketch a haptic sensation and imagine it without feeling it.

**Rapid Iteration** – Design requires fluid, playful interaction with potential designs and the associated problem space. Haptic design sometimes requires fuzzy goals like feeling “just right”, requiring designers and users to feel design candidates. When iteration is slow, it is painful and distracting.

## Refine

Design requires iteration to *refine* an initial set of ideas into a single well-developed one through concept generation followed by iterative revision, problem-solving and evaluation, until only small tweaks are necessary. Haptic experiences must leverage refinement to be tailored to each application area and support individual differences.

Incorporating haptic technology into a design is an extremely vertical process, dependent on specifics of hardware, firmware, software, application, and multi-modal context. With the complexity of these many components, there can be a significant initial cost to setup a first haptic experience; then, adding this complexity to the time needed to program, recompile, or download to a microcontroller means iteration cycles have the potential to be slow and painful. There are two stand-out features to support refinement: mature, polished tools, and adaptable interfaces.

**Mature design tools** – Implemented design tools require a glut of features, *e.g.*, picture the sheer number of commands, shortcuts, and organizational scaffolding supplied by image editing software like Photoshop. This power and precision can improve refinement, especially when integrated into haptic media pipelines to fluidly move initial ideas to final experiences. We describe the road to mature tools in Section 9.3.2.

**Adaptable interfaces** – Calibration, customization, and sensing were identified in Chapter 8 as one major approach for handling the varied end-user context. These techniques will be essential to ensure consistency and quality of refined sensations, or to let designers and users alike fine-tune their experiences. We describe these in more detail in Section 9.2.2.

## Browse

“Browse” can have specific meanings for interacting with data [188]. Here, we use *browse* to refer more generally to the act of looking at examples, *e.g.*, corkboards of previous designs [30]; drawing from previous personal and professional experiences, *e.g.*, one’s repertoire [235]; or real-life sources to inform a design. We found this emerged in different ways: in Chapter 3, participants used their personal experiences to interpret sensation meaning (*i.e.*, schemas, discussed more later); in Chapter 4, one animator brought up a YouTube video of a heartbeat to ground his animation; in Chapter 8 several participants described collecting examples or using guide books.

We highlight this activity because haptic designers encounter modality-specific barriers when gathering, managing, and searching for examples. Explicitly supporting browsing can make a difference: in Chapter 5, we found visible, incor-

porable examples both eased design and helped scaffold learning for non-experts. We believe scaffolding to be extremely important, as there are few haptic designers practicing today. Browsing is also tightly associated with the ability to *share* designs and collaborate; when one designer shares their designs or ideas, others are able to browse it. We highlight two main challenges to supporting browsing in HaXD: representation and access.

***Representations of single sensations:*** – How do we store, view, and organize haptic experiences? Haptic technologies are often inherently interactive, part of a multimodal experience with visual and audio feedback, and can take a variety of physical forms depending on the output (and input) device.

***Overviews, search, and skimming:*** – Collections of examples, especially visual or physical collections, are often displayed spatially for ambient reference or to enable quick scanning. When you cannot feel multiple things, it can be hard to get the big picture or swiftly peruse a collection. Both designer and end-users have needs for finding similar or different vibrations in a collection.

## Share

Sharing designs is valuable at different stages of the design process [149], whether for informal feedback from friends and colleagues, formal evaluation when refining designs, or distributing to the target audience for use and community for re-use [245]. As haptic experiences must be felt, this process works best when collocated with only a few collaborators, whether by having collaborators work in the same lab, or by showing final experience in physical demos. During ideation, ideas can be generated when collaborating remotely, but physical devices need to be shipped back and forth and it is difficult to troubleshoot and confirm that configuration and physical setup are the exact same. Feedback also typically needs to be collocated, using in-lab studies or feedback, or shipping devices between collaborators. Furthermore, visual and audio design support very easy capture of ideas to share later, through smartphone cameras and microphones, that could later be browsed. We suggest two directions for future work: easy capture of design ideas to share for later, and remote sharing through proxies.

***Capturing ideas*** – Inspiration can strike at any time. In order to *browse* ideas

later, or to snap a haptic picture and *share*, we need advanced haptic cameras [168]. Repositories are only useful when they are populated; easy capturing methods can encourage crowds to upload their own content for later use, perhaps leading to stock haptic experiences (like stock images) and a viable venue for freelance haptic designers.

**Remotely or asynchronously share haptics** – Touch is a proximal sense, and difficult to share asynchronously or over large distances. Techniques like proxy sensations (Chapter 6), easy calibration (Section 9.2.2), and fabricated haptics using, *e.g.*, 3D printers [265] can all help *share* these physical sensations around the world.

### 9.2.2 Generalizing Devices and Sensations

One major challenge facing haptic designers is the variety of haptic devices available. Each device has different physical properties, and may use different actuation principles or sensory modalities to communicate with the user. This might be analogous to how modern web sites employ responsive design, adapting to different screen sizes, albeit more extreme. A screen, at the end of the day, is that plane with a given physical size and pixel size; with haptics, contextual problems like grip can influence feedback, and haptic feedback can vary from single VT actuators to VT grids, programmable friction, skin stretch, or force-feedback devices. We suggest three ways of managing this complexity: Grouping devices and interactions into *paradigms*, considering representational *translations*, and using affordances and closed-loop sensing to create *consistency*. A fourth related strategy, enabling customization, is so important we discuss it later.

**Paradigms** – First captured in Chapter 8, we believe that paradigms are a key concept to designing HaXD tools. We define a “paradigm” as an abstracted model of how to work with a haptic device. Different programming language paradigms, such as functional or object-oriented languages, enable programmers to think in different ways more appropriate to their problem. We believe that different haptic or multimodal paradigms will enable different problem solving techniques for HaXD. In our in-depth studies we present three: an instrument paradigm, an animation paradigm, and a track-based editing paradigm.

There is a many-to-many mapping between paradigms and haptic devices. Tactile animation can be used for multiple spatial grids and track based editors are generalized enough to handle multiple display types. Meanwhile, a multi-VT grid could be controlled by any of these three paradigms. As haptic displays become more diverse, we expect paradigms to play a larger role for organizing design perspectives, and multi-paradigm tools to become successful, just as multi-paradigm programming languages like Python and JavaScript afford flexibility, power, and accessibility - providing increasingly low barriers, wide walls, and high ceilings.

***Consistency through Adaptable Interfaces*** – Variability in and poor designer control over context – user attention and device form factor and manner of connection, as well as use environment – mean that haptic sensations often need to be tuned to both each person and each use case. In Chapter 8, we suggested that adaptable interfaces could help manage changing context and encourage consistency and appropriate feedback.

Our industry haptic designers would talk about working with automotive companies, and how the material in the dashboard could affect the final haptic sensation. By controlling this material and working in a known environment, haptic designers might be able to keep their designs more consistent. Similarly, wearable devices like the wristbands (Pebble, Apple Watch) have a known location on the user; designers can use that knowledge to their advantage. They can also use the materials of their wrist-straps to ensure a reliable tightness or pressure on the skin. Force-feedback devices like haptic knobs might change their handles, using physical affordances to suggest a grip to the user.

Alternatively, closed-loop sensing might be able to standardize sensations. Blum et al. [16] showed that accelerometers can provide insight into perceived loudness of VT stimuli. Techniques like activity classification (*e.g.*, [232]), or even vibration sensing of a VT effect could help reduce noise from physical changes and material properties. This could be done *in-situ*, or during manufacturing for different device materials as a quality assurance step.

End-users might benefit from *customizing* aspects of haptic design elements, whether by choosing pre-formed settings and “skins”, adapting defaults, or wholly designing their own. Possible approaches range from volume-like slider controls, options to select sensations from curated collections, or, at the more complex end,

perceptually-confirmed filters like those found in Instagram or PhotoShop [225, 239, 240].

### 9.2.3 Framing and Meaning

In our focused design projects (Chapter 7), we found that having a cohesive, intentional conceptual framing was critical for compelling haptic experiences. We suggest three ways of designing meaning into haptic experiences: schemas and metaphors, design languages, and reinforcement through narrative context and other modalities.

**Schemas and Metaphors** – Schemas are existing conceptual models used as transitional objects to understanding new concepts [200]. We found this procedure occurred not only in educational contexts, but also in design. In our early Haptic Instrument exploration, we found our participants' prior experience was a lens through which they interpreted haptic sensations. For example, one cat-owning participant interpreted sensations as cat purring, while another drew on their knowledge of engines and cars. Heartbeats and rain [128] are effects that were easily understand by general participants, and verified using perceptual studies. Schemas are useful both for framing user interpretation of haptic experiences, and for designers themselves. Many previous systems have their roots in other, non-haptic concepts, *e.g.* Touch TV [183]. This enables transfer effects; visual animators were able to easily create tactile designs using Tactile Animation (Chapter 4).

**Design Languages** – Another way of framing a haptic experience is to use a *design language* like Google's Material Design (<https://material.google.com>). A design language is a defined set of aesthetic and interactive rules to ensure a consistent look-and-feel. We also believe that Gestalt-like principles will play a role in defining the possible design languages for haptics, much like musical concepts of thematic development, restatement, elaboration, and expectation, or graphical design concepts like contrast, repetition, alignment, and proximity are the tool with which languages can be formed. Previous efforts have identified frequency, amplitude, rhythm, affect, and spatial location as the main design elements for vibrotactile design. We have started to identify similar, middle level concepts - alignment and repetition emerged in the Macaron study.

***Narrative Context and Multimodal Reinforcement*** – The intent of a haptic sensation is not always interpretable from the sensation itself. A great deal of the interpretation of an effect depended on the narrative context. Previous work used linguistic descriptions, such as “light rain” [128]. In our FeelCraft and Feel Messenger studies, we found that linking adaptable sensations to in-game stimuli was effective. With Feel Messenger, we at first attempted feel effects with abstract icons, such as “motor” for a rumble effect. In early piloting, these were not very helpful for understanding. Adding in vibrant cartoon emoji icons, and using a cat’s face (for a purr) rather than a motor image were much more effective in sending haptic icons.

It is also worth mentioning the role of realism in a haptic experience. There are two types of realism, photo-realism (veridicality) and real-seeming (verisimilitude) [178]. For example, cartoons are clearly not depictions of reality (they do not display veridicality), but they can appear life-like (they display verisimilitude). In this dissertation, we focused on verisimillitude rather than veridicality; the latter is often already accommodated by realistic rendering techniques. We believe both require a design process, but more photo-realistic approaches have different challenges than cartoony ones, and may require more of an engineering perspective than a design perspective. That said, sometimes combining the two is helpful: in computer graphics, physical simulation and realistic rendering are augmented by artistic control over certain scenes or effects.

### 9.3 HaXD Tools: Designing and Implementing

In this section, we comment on the specific features and forms HaXD support tools might involve. Because of the diverse activities described in the previous section, we believe there is no silver bullet: haptic design tools are likely to form a suite or ecosystem. Here, we discuss ways to enable creativity through mature tools with “a low barrier, wide walls, and a high ceiling.” We talk about important collaborative techniques and how to deploy implemented tools. We discuss implications for developers and software engineering teams. Finally, we conclude with some comments on our evaluation methodology and how future HaXD tools might be evaluated.

### 9.3.1 Communities and Online Deployment

Unfortunately, haptic technology faces obstacles to *browsing* and *sharing*, especially when under development; this has typically confined distribution and exposure to lab prototypes available only to in-person visitors. Demos are difficult to setup and there is little infrastructure in place for distribution. While synchronous, collocated collaboration is effective with demos, remote or asynchronous collaboration is rife with trouble. Consistency must be maintained, and setup can be painful for those not trained in setting up devices. On top of this, we found a strong tendency to show, not tell sensations, and an impoverished language especially for non-experts. Without a shared reference point of physically feeling the sensation, we believe that design can be easier, especially when a language of design is underdeveloped.

Recently, online interfaces have emerged for sourcing content, distributing content, and distributing media itself. We found that moving to a web-based tool with Macaron greatly facilitated distribution. Online deployment widens exposure and speeds development, making it easier for designers to be inspired by or directly build upon one another's work. The trend will accelerate as the field matures, but there will need to be concurrent development of accessible hardware to connect with software tools.

**Crowdsourcing and broadcasting** – We reviewed some of the substantial challenges and spoke of one type of solution. In HapTurk (Chapter 6), we showed proxies of high quality haptic experiences can communicate key aspects on more shareable media, to gain access to crowdsource evaluation tools like Mechanical Turk. Proxies might be able to generalize in other ways, for example, using video to infer feedback about physically moving objects like the CuddleBits.

Proxies can do more than elicit feedback from crowds. It might also be a viable way to translate sensations between representations, analogous to downsampling high-definition video broadcasts for standard definition televisions. More exotic proxies, like using vibrotactile feedback to represent force or friction, could be considered. Future perceptual studies are needed to accomplish this.

**Open Haptics – design sharing communities** – Other kinds of designer-facing online communities and outreach activities may assist with open haptic media –

making it easier to share design resources, build up a haptics design culture, and, where possible, cooperate on establishing a consistent design language of haptics. For example, online software like VibViz [240] and Macaron (Chapter 5) provide details to designers anywhere, while open hardware projects like HapKit [198] and Haply [89] are available to hackers and students. Conference workshops and hardware kits provide users and designers with additional means to experiment with advanced haptics.

Each of these projects solve different problems and provide independent benefits. Online collaboration, and resources like articles on haptic perception or tutorials on how to effectively create haptics, will connect more designers, artists, developers, students, and hackers and help to build haptics into new user experiences.

**Show, don't tell** – We found that demonstrations were critical for haptic designers in the wild. To help elicit requirements, customers were brought in to try out various demos. To persuade customers, actually feeling the haptics was critical, if not always enough. The Haptic Instrument showed evidence for deictic features (*e.g.*, “what do you think of *this*?”), which facilitated direct demonstration without having to resort to indirect linguistic descriptions. In Macaron, exposing the underlying structure of examples led to improved understanding of how to develop sensations and developed haptic idioms.

### 9.3.2 Towards a Mature HaXD Tool Suite

Given the diverse activities that need to be supported for HaXD, we envision a suite of tools to support haptic designers. Here, we outline important features that we believe will enable such a suite

**Soft Features** – Repeatedly, participants asked for “soft features”, associated with more polished tools. This includes features like copy and paste, undo and redo, saving and loading, grouping, looping, reduced delay, and high-fidelity rendering. We increasingly found, as we iteratively developed HaXD tools, that these features are more important than getting the right paradigm. As long as a designer is able to freely and accurately create, they can work around awkward design metaphors.

***Low barrier, wide walls, high ceiling*** – A major goal of our work was to support creativity with haptic technology, and to support low barriers, wide walls, and a high ceiling [211, 245]. We’ve confirmed that this is critical for HaXD, and found ways of accomplishing it. As we mentioned, our participants found soft features essential, which helped to free them to make mistakes, explore various options, and provide both accessibility (low barriers) and refinement (high ceilings). For example, in Tactile Animation, participants found the animation objects easier for exploration and non-expert designers, while vector sensations offered more fine-tuned control. Similarly, we found the more flexible track-based paradigm used by Macaron to allow for various paths through the interface, and was generalizable to other sensations like simple 1-DOF robots.

***Engineering useful features into mature tools*** – There is value in seamless access to many small but useful features, like direct manipulation, undo and redo, copy and paste, selection and group manipulation, and import and export to various formats. Individually, many of these do not present major research or usability problems, but integrating them is another matter. There are at least two obvious approaches: additive and haptics-specific.

Haptics authoring capability can be added to existing mature platforms focused on another modality – *e.g.*, to Photoshop (for graphics) or Premier (video). Force-feedback is already integrable into certain video game and virtual world environments (*e.g.*, Unity, XNA), but this is only a small subset of possible haptic experiences.

To truly optimize haptics capabilities, it may be worthwhile to invest serious development into a haptics-specific platform; or more likely, many attempts at such a thing focused on different categories of hardware (*e.g.*, tactile wearables versus 3D desktop force feedback environments) or application area, perhaps by extending initial low-level editors already available.

### 9.3.3 Notes on Implementing HaXD Tools

During our in-depth studies, we looked at three different platforms for implementing HaXD support tools: Android on tablet for mHIVE, Python on desktop for Mango, and JavaScript deployed on the web for Macaron. From these three im-

plementations, and from attempting to distribute or deploy them, we have found several lessons for implementing interactive software for HaXD support.

***Observer Pattern*** – Well established as a software engineering design pattern, we found the observer pattern was critical in keeping the complex interfaces of our design tools synchronized. This is especially critical because we need to synchronize haptic, audio, and video playback, and allow implementations through both temporal and spatial means. In Mango, we implemented this pattern ourselves, but in Macaron, we used React to automate this process.

***Components and Track-based Editing*** – Another valuable approach to develop extensible tools was React’s components, interface elements that can be parameterized and reused. This technique, along with a carefully organized architecture and the generic track-based editor control paradigm it very easy to extend Macaron. We were able to build the first version of MacaronBit in a single day.

***Flexible, extensible data structures*** – Because of the complexity and variance of haptic devices, we employed lightweight, extensible data structures: Mango, Macaron, and FeelCraft used JavaScript Object Notation (JSON). JSON which allowed us to specify only the required information needed, whether for device parameters in Mango, or sensations created by both Mango and Macaron. Our tools would check JSON files for designed features - like amplitude tracks in Mango - and accommodated stubs for unsupported features - like frequency tracks. These structures were simple, human-readable, ignored extraneous detail, and could gracefully fail when poorly formatted.

***No Delay*** – In interviews with designers, we found that delay was critical; multimodal sensations had to be tightly synchronized. We found similar problems with our tools. mHIVE had a short delay which was distracting to participants, particularly when they tried to play very short pulses; Macaron’s real-time audio synthesizer sometimes created a “muddy” effect because it had a limited update rate. We found this disappeared after we implemented a .WAV exporting function. Combined with our findings that users would switch between focused, in-depth editing and more reflective experiencing, we suggest (and are working to implement) a pre-feel/render model, like with visual effects tools.

***Distribution requires hardware*** – An obvious, but critical, requirement for HaXD tools is that they require the appropriate hardware. Above we’ve discussed

flexible architectures and data structures to support different hardwares and paradigms of sensations. In addition, potential designers need easy access to hardware, *e.g.*, through self-assembled DIY devices, online distribution methods, or translating to existing platforms like phone vibrations.

**Logging and Analytics** – One important feature for modern software is remote analytics. Various types of metrics and usage statistics help developers prioritize development, fix bugs, and report to investors. Because haptic technology extends into the physical world, one can consider using remote analytics both on software and on physical devices.

#### 9.3.4 Evaluating HaXD Tools

Creativity-support tools do not yet have standardized evaluation methods [245]. During our in-depth studies, we iteratively developed methods from previously established methodologies and techniques.

Post interviews were effective. Early in our investigation, we found that participants found traditional think-aloud protocols challenging. Attention was already split between perceiving sensory input on their hand while simultaneously designing sensations. In response, we adopted unintrusive logging and post-interviews, both of which were effective in capturing aspects of the haptic design process.

Phenomenology and grounded theory methods worked well together. Because of the close connection with participant experience, we adopted techniques from phenomenology, both to capture the sensory experience of haptic sensations, and the experience of design. This perspective was useful for rigorous examination of our participants' interviews and to guide the interview process. In addition, the practical techniques like clustering statements into both in-vivo language and analytical language were a concrete way to manage interview analysis. To better equip ourselves to analyze larger sets of data and develop a broader theory, we also drew upon grounded theory as described by Corbin and Strauss [49]. Especially when analyzing screen-captured video, coding techniques helped identify countable data and added a second layer of data analysis to complement phenomenology.

Later quantitative analysis complemented qualitative results. Qualitative analysis of post-interviews provided valuable insight, but only gave a partial view of HaXD.

Timing analysis and visualized logs captured data that may not have been observed by the researcher or reported by the participant in a post-interview. Analytics also offer a transition into scaling data collection for deployed tools. However, some quantitative scales were most useful because of the discussions they inspired. Rating scales of confidence and difficulty were not trustworthy with the small sample sizes used in our in-depth studies. These ratings provided an elicitation device, inviting participants to verbally comment on the difficulty of or their happiness with their designs. As we scale to more natural settings and higher sample sizes, we hope quantitative findings from rating scales will provide additional insight.

Design tasks needed to be carefully chosen. With the initial Haptic Instrument study, we asked participants to freely explore the interface and attempt to design for affective words like happy or sad. This was challenging for participants. In our Tactile Animation study, we used more defined scenarios - a heartbeat, a directional cue for driving, and a sound-based design task. The first two were effective and descriptive for our participants, but the sound task in particular engaged them; it also gave us controls over theoretical dimensions like complexity or abstractness and was externally valid with the multimodal nature of haptic design. In our final in-depth study, we adopted animations instead of sounds, with similar results.

## 9.4 Future Work

The next steps for this work are to directly follow up on our synthesized recommendations to establish HaXD, continue to expand our tools and evaluation methods, and invert the premise of this thesis: use haptic technology to support design and problem solving.

We are already following up on our synthesized recommendations. Macaron was deployed online, along with a preliminary DIY haptic wristband and amplifier<sup>1</sup> to enable anyone, anywhere to start prototyping vibrotactile icons. We are planning to develop 3D printed models and online distribution methods to further facilitate artists, designers, and makers to work with haptic technology. We are also reaching out to other haptic researchers to find a way to connect their work with end-users

---

<sup>1</sup><http://www.instructables.com/id/MacaronKit-USB-Powered-Mono-Audio-Amplifier>

through tutorials, articles, and other online tools.

Next, we plan to expand our tools to support more paradigms, haptic sensations, and evaluation methods, primarily using Macaron as a development platform. We are actively developing MacaronMix, an extension of Macaron which support interpolation of VT icons using novel algorithms; this new tool paradigm takes two *browsed* examples and directly combines them. We also seek to expand Macaron's output modalities to include directional capabilities, such as that explored by tactile animation, and to further develop the user logs from Chapter 5 into an analytical suite to further capture the haptic design process. More generally, we plan to follow up on our findings on Csikszentmihalyi's theory of flow [54] as a means to evaluate creativity-support tools.

Finally, haptic technology can support design, problem-solving, and sense-making. Learning benefits from physically embodied interactions [200]; meanwhile, professionals like architects, designers, and psychiatrists approach each new problem or patient with fresh eyes, seeking to learn about it [235]. We believe that the link between haptic technology and creativity runs both ways. Possibilities include developing accessible sense-making platforms [255], and exploring creative, haptic therapy to promote mental wellness.

## 9.5 In Closing

Our technology continues to push us toward a mixed reality, where physical objects compute, and people can enter realistic virtual worlds. We strive towards computers that speak on human terms, both in end-user experiences by engaging all of our senses, and by supporting human creativity when designing those experiences. Haptic technology is poised to reach out and connect with our senses of touch. By understanding haptic experience design, and how to support it, we can encourage and enable the advantages offered by this emerging modality.

# Bibliography

- [1] M. Abdur Rahman, A. Alkhaldi, J. Cha, and A. El Saddik. Adding haptic feature to YouTube. In *Proceedings of the international conference on Multimedia - MM '10*, pages 1643–1646, New York, New York, USA, oct 2010. ACM Press. ISBN 9781605589336. doi:10.1145/1873951.1874310. URL <http://dl.acm.org/citation.cfm?id=1873951.1874310>. → pages 3, 24, 95
- [2] J. Allen, L. Cang, M. Phan-Ba, A. Strang, and K. MacLean. Introducing the Cuddlebot: A Robot That Responds to Touch Gestures. In *Proceedings of the Tenth Annual ACM/IEEE International Conference on Human-Robot Interaction Extended Abstracts*, HRI'15 Extended Abstracts, page 295, New York, NY, USA, 2015. ACM. ISBN 978-1-4503-3318-4. doi:10.1145/2701973.2702698. URL <http://doi.acm.org/10.1145/2701973.2702698>. → pages 11, 194
- [3] M. Allen, J. Gluck, K. MacLean, and E. Tang. An initial usability assessment for symbolic haptic rendering of music parameters. In *Proceedings of the 7th international conference on Multimodal interfaces*, pages 244–251. ACM, 2005. → pages 93
- [4] D. Alles. Information Transmission by Phantom Sensations. *IEEE Transactions on Man Machine Systems*, 11(1):85–91, Mar. 1970. ISSN 0536-1540. doi:10.1109/TMMS.1970.299967. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4081935>. → pages 12, 47, 49, 54, 59
- [5] Amazon.com Inc. Amazon Mechanical Turk Requester Best Practices Guide, 2015. Accessed: 2016-01-08. → pages 94, 108
- [6] Android Open Source Project. Android Developers, 2012. URL <http://developer.android.com/index.html>. Accessed: 2012-07-20. → pages 38

- [7] F. Arab, S. Paneels, M. Anastassova, S. Coeugnet, F. Le Morellec, A. Dommes, and A. Chevalier. Haptic patterns and older adults: To repeat or not to repeat? In *2015 IEEE World Haptics Conference (WHC)*, pages 248–253. IEEE, jun 2015. ISBN 978-1-4799-6624-0. doi:10.1109/WHC.2015.7177721. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7177721>. → pages 10, 17, 90, 93
- [8] I. Asimov. *Foundation and Empire*. Gnome Press, 1952. → pages 34
- [9] M. Azmandian, M. Hancock, H. Benko, E. Ofek, and A. D. Wilson. Haptic Retargeting: Dynamic repurposing of passive haptics for enhanced virtual reality experiences. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems - CHI '16*, pages 1968–1979, New York, New York, USA, 2016. ACM Press. ISBN 9781450333627. doi:10.1145/2858036.2858226. URL <http://dl.acm.org/citation.cfm?doid=2858036.2858226>. → pages 12, 15
- [10] P. Bach-y Rita and Kaczmarek. Form perception with a 49-point electrotactile stimulus array on the tongue: A technical note. *Journal of rehabilitation research and development*, 35(4):427, jan 1998. ISSN 0748-7711. → pages 10
- [11] P. Bach-y Rita, C. C. Collins, F. A. Saunders, B. White, and L. Scadden. Vision Substitution by Tactile Image Projection. *Nature*, 221(5184): 963–964, mar 1969. ISSN 0028-0836. doi:10.1038/221963a0. URL <http://dx.doi.org/10.1038/221963a0>. → pages 13
- [12] P. Bach-y Rita, M. E. Tyler, and K. A. Kaczmarek. Seeing with the Brain. *International Journal of Human-Computer Interaction*, 15(2):285–295, apr 2003. ISSN 1044-7318. doi:10.1207/S15327590IJHC1502\_6. → pages 13
- [13] O. Bau, I. Poupyrev, A. Israr, and C. Harrison. TeslaTouch: Electrovibration for Touch Surfaces. In *Proceedings of the 23rd annual ACM symposium on User interface software and technology - UIST '10*, page 283, New York, New York, USA, oct 2010. ACM Press. ISBN 9781450302715. doi:10.1145/1866029.1866074. URL <http://dl.acm.org/citation.cfm?id=1866029.1866074>. → pages 10
- [14] J. Bliss, M. Katcher, C. Rogers, and R. Shepard. Optical-to-Tactile Image Conversion for the Blind. *IEEE Transactions on Man Machine Systems*, 11(1):58–65, mar 1970. ISSN 0536-1540. doi:10.1109/TMMS.1970.299963.

URL

<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4081931>.  
→ pages 10, 13, 146

- [15] B. S. Bloom and M. D. Engelhart. *Taxonomy of Educational Objectives: The Classification of Educational Goals: By a Committee of College and University Examiners: Handbook 1*. David McKay, 1969. → pages xvi, 136
- [16] J. R. Blum, I. Frissen, and J. R. Cooperstock. Improving Haptic Feedback on Wearable Devices through Accelerometer Measurements. In *Proceedings of the 28th Annual ACM Symposium on User Interface Software & Technology - UIST '15*, pages 31–36, New York, New York, USA, nov 2015. ACM Press. ISBN 9781450337793.  
doi:10.1145/2807442.2807474. URL  
<http://dl.acm.org/citation.cfm?id=2807442.2807474>. → pages 13, 201
- [17] R. A. Bolt. Put-that-there: Voice and Gesture at the Graphics Interface. *ACM SIGGRAPH Computer Graphics*, 14(3):262–270, July 1980. ISSN 00978930. doi:10.1145/965105.807503. URL  
<http://dl.acm.org/citation.cfm?id=965105.807503>. → pages 41
- [18] L. Bonanni, C. Vaucelle, J. Lieberman, and O. Zuckerman. TapTap: A Haptic Wearable for Asynchronous Distributed Touch Therapy. In *CHI '06 extended abstracts on Human factors in computing systems - CHI EA '06*, page 580, New York, New York, USA, apr 2006. ACM Press. ISBN 1595932984. doi:10.1145/1125451.1125573. URL  
<http://dl.acm.org/citation.cfm?id=1125451.1125573>. → pages 16
- [19] S. Brave and A. Dahley. inTouch: a medium for haptic interpersonal communication. In *CHI '97 extended abstracts on Human factors in computing systems looking to the future - CHI '97*, pages 363–364, New York, NY, USA, 1997. ACM Press. ISBN 0897919262.  
doi:10.1145/1120212.1120435. URL  
<http://portal.acm.org/citation.cfm?doid=1120212.1120435>. → pages 16
- [20] S. Brewster and L. M. Brown. Tactons: structured tactile messages for non-visual information display. In *AUIC '04*, pages 15–23, Jan. 2004.  
URL <http://dl.acm.org/citation.cfm?id=976310.976313>. → pages 25, 32, 36, 73, 90, 122, 124
- [21] S. Brewster and A. Constantin. Tactile feedback for ambient awareness in mobile interactions. In *BCS '10*, pages 412–417. British Computer Society,

- Sept. 2010. ISBN 978-1-78017-130-2. URL  
<http://dl.acm.org/citation.cfm?id=2146303.2146365>. → pages 17
- [22] S. A. Brewster, P. C. Wright, and A. D. N. Edwards. An evaluation of earcons for use in auditory human-computer interfaces. In *CHI '93*, pages 222–227, New York, USA, May 1993. ACM Press. ISBN 0897915755. doi:10.1145/169059.169179. URL  
<http://dl.acm.org/citation.cfm?id=169059.169179>. → pages 25, 32
  - [23] L. Brown, S. Brewster, and H. Purchase. A First Investigation into the Effectiveness of Tactons. In *World Haptics '05*, pages 167–176. IEEE, 2005. ISBN 0-7695-2310-2. doi:10.1109/WHC.2005.6. URL  
<http://ieeexplore.ieee.org/xpl/articleDetails.jsp?arnumber=1406930>. → pages 25, 32
  - [24] L. M. Brown and T. Kaaresoja. Feel who's talking: Using Tactons for Mobile Phone Alerts. In *CHI '06 extended abstracts on Human factors in computing systems - CHI EA '06*, page 604, New York, New York, USA, apr 2006. ACM Press. ISBN 1595932984. doi:10.1145/1125451.1125577. URL <http://dl.acm.org/citation.cfm?doid=1125451.1125577http://dl.acm.org/citation.cfm?id=1125451.1125577>. → pages 17, 95
  - [25] L. M. Brown, S. A. Brewster, and H. C. Purchase. Tactile crescendos and sforzandos. In *CHI Extended Abstracts '06*, pages 610–615, New York, USA, Apr. 2006. ACM Press. ISBN 1595932984. doi:10.1145/1125451.1125578. URL  
<http://dl.acm.org/citation.cfm?id=1125451.1125578>. → pages 17, 25, 32, 36, 73
  - [26] L. M. Brown, S. A. Brewster, and H. C. Purchase. Multidimensional tactons for non-visual information presentation in mobile devices. In *MobileHCI '06*, pages 231–238, New York, USA, Sept. 2006. ACM Press. ISBN 1595933905. doi:10.1145/1152215.1152265. URL  
<http://dl.acm.org/citation.cfm?id=1152215.1152265>. → pages 25, 32, 36, 90, 93
  - [27] L. Brunet, C. Megard, S. Paneels, G. Changeon, J. Lozada, M. P. Daniel, and F. Darses. Invitation to the voyage: The design of tactile metaphors to fulfill occasional travelers' needs in transportation networks. In *2013 World Haptics Conference (WHC)*, pages 259–264. IEEE, apr 2013. ISBN 978-1-4799-0088-6. doi:10.1109/WHC.2013.6548418. URL

<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6548418>.  
→ pages 17, 90, 93

- [28] P. Bucci, X. L. Cang, M. Chun, D. Marino, O. Schneider, H. Seifi, and K. MacLean. CuddleBits: an iterative prototyping platform for complex haptic display. In *EuroHaptics '16 Demos*, 2016. → pages viii, 115
- [29] P. Buttolo, R. Oboe, and B. Hannaford. Architectures for shared haptic virtual environments. *Computers & Graphics*, 21(4):421–429, jul 1997. ISSN 00978493. doi:10.1016/S0097-8493(97)00019-8. URL [http://dx.doi.org/10.1016/S0097-8493\(97\)00019-8](http://dx.doi.org/10.1016/S0097-8493(97)00019-8). → pages 11
- [30] B. Buxton. *Sketching User Experiences: Getting the Design Right and the Right Design*. Morgan Kaufmann Publishers Inc., 2007. → pages xviii, 3, 18, 19, 71, 74, 151, 158, 198
- [31] G. A. Calvert, M. J. Brammer, and S. D. Iversen. Crossmodal identification. *Trends in Cognitive Sciences*, 2(7):247–253, July 1998. ISSN 1364-6613. doi:10.1016/S1364-6613(98)01189-9. → pages 130
- [32] G. Campion. The Pantograph Mk-II: A Haptic Instrument. pages 45–58. Springer London, 2005. doi:10.1007/978-0-85729-576-7\_3. URL [http://link.springer.com/10.1007/978-0-85729-576-7{\\_.}3](http://link.springer.com/10.1007/978-0-85729-576-7{_.}3). → pages 11
- [33] L. Cang, P. Bucci, and K. E. MacLean. CuddleBits: Friendly, Low-cost Furballs that Respond to Touch. In *Proceedings of the 2015 ACM on International Conference on Multimodal Interaction*, pages 365–366. ACM, 2015. → pages 11, 142
- [34] K. J. Carbonneau, S. C. Marley, and J. P. Selig. A meta-analysis of the efficacy of teaching mathematics with concrete manipulatives. *Journal of Educational Psychology*, 105(2):380–400, 2013. ISSN 1939-2176. doi:10.1037/a0031084. URL <http://doi.apa.org/getdoi.cfm?doi=10.1037/a0031084>. → pages 18, 129
- [35] T. Carter, S. Seah, B. Long, and B. Drinkwater. UltraHaptics: multi-point mid-air haptic feedback for touch surfaces. *Proceedings of the 26th*, 2013. URL <http://dl.acm.org/citation.cfm?id=2502018>. → pages 10
- [36] M. Cartwright and B. Pardo. VocalSketch: Vocally Imitating Audio Concepts. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems - CHI '15*, pages 43–46, New York, New York, USA, apr 2015. ACM Press. ISBN 9781450331456.

doi:10.1145/2702123.2702387. URL  
<http://dl.acm.org/citation.cfm?id=2702123.2702387>. → pages 91, 94, 97

- [37] J. R. Cauchard, J. L. Cheng, T. Pietrzak, and J. A. Landay. ActiVibe: Design and Evaluation of Vibrations for Progress Monitoring. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems - CHI '16*, pages 3261–3271, New York, New York, USA, 2016. ACM Press. ISBN 9781450333627. doi:10.1145/2858036.2858046. URL <http://dl.acm.org/citation.cfm?doid=2858036.2858046>. → pages 13, 17
- [38] J. Cha, Y.-S. Ho, Y. Kim, J. Ryu, and I. Oakley. A Framework for Haptic Broadcasting. *IEEE Multimedia*, 16(3):16–27, July 2009. ISSN 1070-986X. doi:10.1109/MMUL.2009.42. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=5228689>. → pages 25
- [39] A. Chan, K. MacLean, and J. McGrenere. Designing haptic icons to support collaborative turn-taking. *International Journal of Human-Computer Studies*, 66(6):333–355, 2008. URL <http://www.sciencedirect.com/science/article/pii/S1071581907001565>. → pages 14, 16, 25, 32, 73, 92, 93, 95, 97, 98
- [40] A. Chang and C. O’Sullivan. Audio-haptic feedback in mobile phones. In *CHI EA ’05*, pages 1264–1267, Apr. 2005. ISBN 1595930027. doi:10.1145/1056808.1056892. URL <http://dl.acm.org/citation.cfm?id=1056808.1056892>. → pages 23, 117
- [41] A. Chang, S. O’Modhrain, R. Jacob, E. Gunther, and H. Ishii. ComTouch: design of a vibrotactile communication device. In *Proceedings of the conference on Designing interactive systems processes, practices, methods, and techniques - DIS ’02*, pages 312–320, New York, NY, USA, 2002. ACM Press. ISBN 1581135157. doi:10.1145/778712.778755. URL <http://portal.acm.org/citation.cfm?doid=778712.778755>. → pages 16
- [42] J. Chang, K. MacLean, and S. Yohanan. Gesture recognition in the haptic creature. In *Proceedings of the 2010 international conference on Haptics: generating and perceiving tangible sensations, Part I*, EuroHaptics’10, pages 385–391, Berlin, Heidelberg, 2010. Springer-Verlag. ISBN 3-642-14063-7, 978-3-642-14063-1. URL <http://portal.acm.org/citation.cfm?id=1884164.1884223>. → pages 194
- [43] G. Changeon, D. Graeff, M. Anastassova, and J. Lozada. Tactile Emotions: A Vibrotactile Tactile Gamepad for Transmitting Emotional Messages to

- Children with Autism. pages 79–90. Springer Berlin Heidelberg, 2012.  
doi:10.1007/978-3-642-31401-8\_8. URL  
[http://link.springer.com/10.1007/978-3-642-31401-8\\_{-}8](http://link.springer.com/10.1007/978-3-642-31401-8_{-}8). → pages 16
- [44] A. Charpentier. *Analyse experimentale de quelques éléments de la sensation de poids*. 1891. → pages 12, 153
- [45] L.-P. Cheng, P. Lühne, P. Lopes, C. Sterz, and P. Baudisch. Haptic turk: a motion platform based on people. In *Proceedings of the 32nd annual ACM conference on Human factors in computing systems - CHI '14*, pages 3463–3472, New York, New York, USA, apr 2014. ACM Press. ISBN 9781450324731. doi:10.1145/2556288.2557101. URL  
<http://dl.acm.org/citation.cfm?id=2556288.2557101>. → pages 15
- [46] L.-P. Cheng, T. Roumen, H. Rantzsch, S. Köhler, P. Schmidt, R. Kovacs, J. Jasper, J. Kemper, and P. Baudisch. TurkDeck. In *Proceedings of the 28th Annual ACM Symposium on User Interface Software & Technology - UIST '15*, pages 417–426, New York, New York, USA, 2015. ACM Press. ISBN 9781450337793. doi:10.1145/2807442.2807463. URL  
<http://dl.acm.org/citation.cfm?doid=2807442.2807463>. → pages 15
- [47] L. B. Chilton, G. Little, D. Edge, D. S. Weld, and J. A. Landay. Cascade: Crowdsourcing taxonomy creation. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, pages 1999–2008. ACM, 2013. → pages 94
- [48] S. Choi and K. J. Kuchenbecker. Vibrotactile Display: Perception, Technology, and Applications. *Proceedings of the IEEE*, 101(9): 2093–2104, sep 2013. ISSN 0018-9219.  
doi:10.1109/JPROC.2012.2221071. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6353870>. → pages 3, 9, 152, 153, 160
- [49] J. Corbin and A. Strauss. *Basics of Qualitative Research: Techniques and Procedures for Developing Grounded Theory*. Sage Publications, Inc., 3 edition, 2008. → pages 27, 39, 63, 77, 136, 149, 156, 208
- [50] J. W. Creswell. *Qualitative inquiry and research design: choosing among five approaches*. Sage Publications Inc, 3rd edition, 2013. → pages 27, 33, 38, 40
- [51] N. Cross. *Designerly Ways of Knowing*. Springer-Verlag London Limited, 2006. → pages 19, 151

- [52] N. Cross. Creative thinking in design. In *Proceedings of the 2007 Symposium on Science of Design - SoD '07*, page 2, New York, New York, USA, Mar. 2007. ACM Press. ISBN 9781605584362.  
doi:10.1145/1496630.1496632. URL  
<http://dl.acm.org/citation.cfm?id=1496630.1496632>. → pages 27
- [53] N. Cross. *Design Thinking: Understanding How Designers Think and Work*. Berg Publishers, Oxford, UK, 2011. → pages 27, 44
- [54] M. Csikszentmihalyi. *Creativity: Flow and the Psychology of Discovery and Invention*. HarperCollins Publishers, Inc., 1st edition, 1996. → pages 74, 84, 151, 210
- [55] D. Cuartielles, A. Goransson, T. Olsson, and S. Stenslie. Developing Visual Editors for High-Resolution Haptic Patterns. In *HAID'12 Posters and Demos*, pages 42–44, 2012. URL  
<http://www.english.certec.lth.se/haptics/HAID12/-proceedings.pdf>. → pages 23, 50, 52
- [56] H. Culbertson, J. Unwin, and K. J. Kuchenbecker. Modeling and rendering realistic textures from unconstrained tool-surface interactions. *IEEE Transactions on Haptics*, 7(3):381–93, Jan. 2014. ISSN 2329-4051.  
doi:10.1109/TOH.2014.2316797. URL  
<http://www.ncbi.nlm.nih.gov/pubmed/25248220>. → pages 9, 23, 71, 155
- [57] H. Culbertson, J. M. Walker, and A. M. Okamura. Modeling and design of asymmetric vibrations to induce ungrounded pulling sensation through asymmetric skin displacement. In *2016 IEEE Haptics Symposium (HAPTICS)*, pages 27–33. IEEE, apr 2016. ISBN 978-1-5090-0903-9.  
doi:10.1109/HAPTICS.2016.7463151. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7463151>. → pages 146, 189
- [58] F. Danieau, J. Fleureau, A. Cabec, P. Kerbiriou, P. Guillotel, N. Mollet, M. Christie, and A. Lecuyer. Framework for enhancing video viewing experience with haptic effects of motion. In *2012 IEEE Haptics Symposium (HAPTICS)*, pages 541–546. IEEE, mar 2012. ISBN 978-1-4673-0809-0. doi:10.1109/HAPTIC.2012.6183844. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6183844>. → pages 23
- [59] F. Danieau, J. Fleureau, P. Guillotel, N. Mollet, A. Lécuyer, and M. Christie. HapSeat: producing motion sensation with multiple

- force-feedback devices embedded in a seat. In *VRST '12*, pages 69–76, New York, New York, USA, Dec. 2012. ACM Press. ISBN 9781450314695. doi:10.1145/2407336.2407350. URL <http://dl.acm.org/citation.cfm?id=2407336.2407350>. → pages 23, 47, 67
- [60] F. Danieau, J. Bernon, J. Fleureau, P. Guillotel, N. Mollet, M. Christie, and A. Lécuyer. H-Studio: An authoring tool for adding haptic and motion effects to audiovisual content. In *Proceedings of the adjunct publication of the 26th annual ACM symposium on User interface software and technology - UIST '13 Adjunct*, pages 83–84, New York, New York, USA, oct 2013. ACM Press. ISBN 9781450324069. doi:10.1145/2508468.2514721. URL <http://dl.acm.org/citation.cfm?id=2508468.2514721>. → pages 22
- [61] F. Danieau, J. Fleureau, P. Guillotel, N. Mollet, M. Christie, and A. Lécuyer. HapSeat: a novel approach to simulate motion in audiovisual experiences. In *ACM SIGGRAPH 2013*, pages 3035–3038, Anaheim, CA, USA, apr 2013. ACM Press. ISBN 9781450319522. doi:10.1145/2468356.2479604. URL <http://dl.acm.org/citation.cfm?id=2468356.2479604> http://[dl.acm.org/citation.cfm?id=2503368.2503374](http://dl.acm.org/citation.cfm?id=2503368.2503374). → pages 23
- [62] F. Danieau, A. Lecuyer, P. Guillotel, J. Fleureau, N. Mollet, and M. Christie. Enhancing audiovisual experience with haptic feedback: a survey on HAV. *IEEE transactions on haptics*, 6(2):193–205, jan 2013. ISSN 2329-4051. doi:10.1109/TOH.2012.70. URL <http://www.ncbi.nlm.nih.gov/pubmed/24808303>. → pages 15, 25
- [63] F. Danieau, J. Fleureau, P. Guillotel, N. Mollet, M. Christie, and A. Lecuyer. Toward Haptic Cinematography: Enhancing Movie Experiences with Camera-Based Haptic Effects. *IEEE MultiMedia*, 21(2): 11–21, 2014. ISSN 1070-986X. doi:10.1109/MMUL.2013.64. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6695749>. → pages 25, 117, 154
- [64] D. E. DiFranco, G. L. Beauregard, and M. A. Srinivasan. The effect of auditory cues on the haptic perception of stiffness in virtual environments. In *Proceedings of the ASME Dynamic Systems and Control Division*, volume 61, pages 17–22. American Society of Mechanical Engineers, 1997. → pages 12

- [65] M. Dingemanse. Advances in the Cross-Linguistic Study of Ideophones. *Language and Linguistics Compass*, 6(10):654–672, oct 2012. ISSN 1749818X. doi:10.1002/lnc3.361. URL <http://doi.wiley.com/10.1002/lnc3.361>. → pages 142
- [66] P. Dourish. *Where the action is: the foundations of embodied interaction*. MIT Press, 2004. → pages 130
- [67] S. Dow, J. Fortuna, D. Schwartz, B. Altringer, D. Schwartz, and S. Klemmer. Prototyping dynamics: sharing multiple designs improves exploration, group rapport, and results. In *CHI '11*, pages 2807–2816. ACM Press, May 2011. ISBN 9781450302289. doi:10.1145/1978942.1979359. URL <http://dl.acm.org/citation.cfm?id=1978942.1979359>. → pages 19, 27, 71, 85
- [68] S. Dow, A. Kulkarni, S. Klemmer, and B. Hartmann. Shepherding the crowd yields better work. In *Proceedings of the ACM 2012 conference on Computer Supported Cooperative Work - CSCW '12*, page 1013, New York, New York, USA, 2012. ACM Press. ISBN 9781450310864. doi:10.1145/2145204.2145355. URL <http://dl.acm.org/citation.cfm?doid=2145204.2145355>. → pages 152
- [69] J. S. Downs, M. B. Holbrook, S. Sheng, and L. F. Cranor. Are your participants gaming the system? In *Proceedings of the 28th international conference on Human factors in computing systems - CHI '10*, page 2399, New York, New York, USA, apr 2010. ACM Press. ISBN 9781605589299. doi:10.1145/1753326.1753688. URL <http://dl.acm.org/citation.cfm?id=1753326.1753688>. → pages 94
- [70] M. Eid, A. Alamri, and A. Saddik. MPEG-7 Description of Haptic Applications Using HAML. In *2006 IEEE International Workshop on Haptic Audio Visual Environments and their Applications (HAVE 2006)*, pages 134–139. IEEE, 2006. ISBN 1-4244-0761-3. doi:10.1109/HAVE.2006.283780. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4062526>. → pages 24, 95
- [71] M. Eid, S. Andrews, A. Alamri, and A. E. Saddik. HAMLAT: A HAML-Based Authoring Tool for Haptic Application Development. In *LNCS 5024 - Haptics: Perception, Devices and Scenarios*, volume 5024, pages 857–866. 2008. ISBN 978-3-540-69056-6.

- doi:10.1007/978-3-540-69057-3. URL  
<http://www.springerlink.com/index/10.1007/978-3-540-69057-3>. → pages 24, 51, 95
- [72] Z. Eitan and I. Rothschild. How music touches: Musical parameters and listeners' audio-tactile metaphorical mappings. *Psychology of Music*, 39(4):449–467, Nov. 2010. ISSN 0305-7356.  
doi:10.1177/0305735610377592. URL  
<http://pom.sagepub.com/content/39/4/449.short>. → pages 25, 32
- [73] P. Ekman and W. V. Friesen. Constants across cultures in the face and emotion. *Journal of personality and social psychology*, 17(2):124–9, feb 1971. ISSN 0022-3514. URL  
<http://www.ncbi.nlm.nih.gov/pubmed/5542557>. → pages 15
- [74] P. Ekman, I. R. Davidson, P. Ellsworth, and W. V. Friesen. Are There Basic Emotions? *Psychological Review*, 99(3):550–553, 1992. → pages 15, 39
- [75] C. A. Ellis, S. J. Gibbs, and G. Rein. Groupware: some issues and experiences. *Communications of the ACM*, 34(1):39–58, Jan. 1991. ISSN 00010782. doi:10.1145/99977.99987. URL  
<http://dl.acm.org/citation.cfm?id=99977.99987>. → pages 20, 152
- [76] M. Enriquez and K. MacLean. The haptic editor: a tool in support of haptic communication research. In *HAPTICS '03*, pages 356–362. IEEE Comput. Soc, 2003. ISBN 0-7695-1890-7.  
doi:10.1109/HAPTIC.2003.1191310. URL  
<http://ieeexplore.ieee.org/xpl/articleDetails.jsp?arnumber=1191310>. → pages 11, 22, 25, 30, 33, 44, 47, 49, 50, 55, 73, 74, 154, 155
- [77] M. Enriquez, K. MacLean, and C. Chita. Haptic phonemes: basic building blocks of haptic communication. In *ICMI '06*, page 302, New York, USA, Nov. 2006. ACM Press. ISBN 159593541X.  
doi:10.1145/1180995.1181053. URL  
<http://dl.acm.org/citation.cfm?id=1180995.1181053>. → pages 25, 33, 73
- [78] D. Fallman. Design-oriented Human-computer Interaction. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems, CHI '03*, pages 225–232, New York, NY, USA, 2003. ACM. ISBN 1-58113-630-7. doi:10.1145/642611.642652. URL  
<http://doi.acm.org/10.1145/642611.642652>. → pages 21

- [79] A. P. Felt, S. Egelman, and D. Wagner. I've got 99 problems, but vibration ain't one: A survey of smartphone User's concerns. In *Proceedings of the second ACM workshop on Security and privacy in smartphones and mobile devices - SPSM '12*, page 33, New York, New York, USA, oct 2012. ACM Press. ISBN 9781450316668. doi:10.1145/2381934.2381943. URL <http://dl.acm.org/citation.cfm?id=2381934.2381943>. → pages 99
- [80] D. Feygin, M. Keehner, and R. Tendick. Haptic guidance: experimental evaluation of a haptic training method for a perceptual motor skill. In *Proceedings 10th Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems. HAPTICS 2002*, pages 40–47. IEEE Comput. Soc, 2002. ISBN 0-7695-1489-8. doi:10.1109/HAPTIC.2002.998939. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=998939>. → pages 18
- [81] A. Flagg and K. MacLean. Affective touch gesture recognition for a furry zoomorphic machine. In *Proceedings of the 7th International Conference on Tangible, Embedded and Embodied Interaction - TEI '13*, page 25, New York, New York, USA, 2013. ACM Press. ISBN 9781450318983. doi:10.1145/2460625.2460629. URL <http://dl.acm.org/citation.cfm?doid=2460625.2460629>. → pages 15
- [82] A. Flagg, D. Tam, K. MacLean, and R. Flagg. Conductive fur sensing for a gesture-aware furry robot. In *2012 IEEE Haptics Symposium (HAPTICS)*, pages 99–104. IEEE, mar 2012. ISBN 978-1-4673-0809-0. doi:10.1109/HAPTIC.2012.6183776. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6183776>. → pages 15
- [83] N. Fleming and C. Mills. Not another inventory, rather a catalyst for reflection. *To Improve the Academy*, 11, 1992. → pages 136
- [84] FMOD. FMOD Ex API, 2013. URL <http://www.fmod.org>. Accessed: 2012-07-20. → pages 38
- [85] J. Forsslund, M. Yip, and E.-L. Sallnäs. WoodenHaptics. In *TEI '14*, pages 133–140. ACM Press, Jan. 2015. ISBN 9781450333054. doi:10.1145/2677199.2680595. URL <http://dl.acm.org/citation.cfm?id=2677199.2680595>. → pages 11, 24, 154
- [86] C. Frayling. Research in art and design. *Royal College of Art Research Papers*, 1(1):1–5, 1993. → pages 20

- [87] Futurama. Parasites Lost, 2001. → pages 34
- [88] A. Gallace. The science of interpersonal touch: An overview. *Neuroscience & Biobehavioral Reviews*, 34(2):246–259, 2010. ISSN 01497634. doi:10.1016/j.neubiorev.2008.10.004. → pages 16
- [89] C. Gallacher, A. Mohtat, and S. Ding. Toward Open-Source Portable Haptic Displays with Visual-Force-Tactile Feedback Colocation. In *HAPTICS '16*, 2016. ISBN 9781509009039. → pages 11, 154, 205
- [90] Y. Gao, H. A. Osman, and A. El Saddik. MPEG-V based web haptic authoring tool. In *IEEE International Symposium on Haptic Audio Visual Environments and Games (HAVE)*, pages 87–91. IEEE, oct 2013. ISBN 978-1-4799-0849-3. doi:10.1109/HAVE.2013.6679616. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6679616>. → pages 15, 24
- [91] W. Gaver. What Should We Expect from Research Through Design? In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '12, pages 937–946, New York, NY, USA, 2012. ACM. ISBN 978-1-4503-1015-4. doi:10.1145/2207676.2208538. URL <http://doi.acm.org/10.1145/2207676.2208538>. → pages 21, 26
- [92] D. Gaw, D. Morris, and K. Salisbury. Haptically Annotated Movies: Reaching Out and Touching the Silver Screen. In *2006 14th Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems*, pages 287–288. IEEE, 2006. ISBN 1-4244-0226-3. doi:10.1109/HAPTIC.2006.1627106. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=1627106>. → pages 15
- [93] S. Gerofsky. Mathematical learning and gesture: Character viewpoint and observer viewpoint in students' gestured graphs of functions. *Gesture*, 10(2-3):321–343, 2010. → pages 18
- [94] B. G. Glaser and A. L. Strauss. *Awareness of dying*. Transaction Publishers, 1966. → pages 27
- [95] A. M. Glenberg, T. Gutierrez, J. R. Levin, S. Japuntich, and M. P. Kaschak. Activity and Imagined Activity Can Enhance Young Children's Reading Comprehension. *Journal of Educational Psychology*, 96:424, 2004. → pages 130

- [96] S. Greenberg and C. Fitchett. Phidgets: Easy development of physical interfaces through physical widgets. In *UIST '01*, page 209, New York, New York, USA, Nov. 2001. ACM Press. ISBN 158113438X.  
doi:10.1145/502348.502388. URL  
<http://dl.acm.org/citation.cfm?id=502348.502388>. → pages 24, 154
- [97] M. Grunwald and M. John. German pioneers of research into human haptic perception. In *Human Haptic Perception: Basics and Applications*, pages 15–39. Birkhäuser Basel, Basel, 2008. doi:10.1007/978-3-7643-7612-3\_2.  
URL [http://www.springerlink.com/index/10.1007/978-3-7643-7612-3\\_{-}2](http://www.springerlink.com/index/10.1007/978-3-7643-7612-3_{-}2).  
→ pages 8
- [98] S. Guest, J. M. Dessirier, A. Mehrabian, F. McGlone, G. Essick, G. Gescheider, A. Fontana, R. Xiong, R. Ackerley, and K. Blot. The development and validation of sensory and emotional scales of touch perception. *Attention, perception & psychophysics*, 73(2):531–50, Feb. 2011. ISSN 1943-393X. doi:10.3758/s13414-010-0037-y. URL  
<http://www.ncbi.nlm.nih.gov/pubmed/21264727>. → pages 93, 94
- [99] P. Guillotel, F. Danieau, J. Fleureau, and I. Rouxel. Introducing Basic Principles of Haptic Cinematography Editing. In *Eurographics Workshop on Intelligent Cinematography and Editing*, pages 1–7, 2016. → pages 15, 25, 154
- [100] A. L. Guinan, M. N. Montandon, A. J. Doxon, and W. R. Provancher. Discrimination thresholds for communicating rotational inertia and torque using differential skin stretch feedback in virtual environments. In *2014 IEEE Haptics Symposium (HAPTICS)*, pages 277–282. IEEE, feb 2014. ISBN 978-1-4799-3131-6. doi:10.1109/HAPTICS.2014.6775467. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6775467>.  
→ pages 14
- [101] Gunhyuk Park and Seungmoon Choi. Perceptual space of amplitude-modulated vibrotactile stimuli. In *2011 IEEE World Haptics Conference*, pages 59–64. IEEE, jun 2011. ISBN 978-1-4577-0299-0.  
doi:10.1109/WHC.2011.5945462. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=5945462>.  
→ pages 73
- [102] E. Gunther, G. Davenport, and S. O'Modhrain. Cutaneous grooves: composing for the sense of touch. In *NIME '02*, pages 1–6, New York, NY, USA, May 2002. ISBN 1-87465365-8. URL

<http://dl.acm.org/citation.cfm?id=1085171.1085181>. → pages 14, 22, 25, 32, 36, 37, 49, 73, 154

- [103] A. Gupta, T. Pietrzak, N. Roussel, and R. Balakrishnan. Direct Manipulation in Tactile Displays. *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems*, pages 3683–3693, 2016.  
doi:10.1145/2858036.2858161. URL  
<http://doi.acm.org/10.1145/2858036.2858161>. → pages 10, 12
- [104] A. Haans and W. IJsselsteijn. Mediated social touch: a review of current research and future directions. *Virtual Reality*, 9(2-3):149–159, jan 2006.  
ISSN 1359-4338. doi:10.1007/s10055-005-0014-2. URL  
<http://link.springer.com/10.1007/s10055-005-0014-2>. → pages 16
- [105] S. G. Hart and L. E. Staveland. Development of NASA-TLX (Task Load Index): Results of Empirical and Theoretical Research. *Advances in Psychology*, 52(C):139–183, 1988. ISSN 01664115.  
doi:10.1016/S0166-4115(08)62386-9. → pages 134
- [106] B. Hartmann, L. Yu, A. Allison, Y. Yang, and S. R. Klemmer. Design as Exploration : Creating Interface Alternatives through Parallel Authoring and Runtime Tuning. In *UIST*, pages 91–100, 2008. ISBN 9781595939753. → pages 19, 151
- [107] M. Hassenzahl, M. Burmester, and F. Koller. AttrakDiff: Ein Fragebogen zur Messung wahrgenommener hedonischer und pragmatischer Qualität. pages 187–196. Vieweg+Teubner Verlag, 2003.  
doi:10.1007/978-3-322-80058-9\_19. URL  
[http://link.springer.com/10.1007/978-3-322-80058-9\\_{-}19](http://link.springer.com/10.1007/978-3-322-80058-9_{-}19). → pages 173
- [108] V. Hayward. A brief taxonomy of tactile illusions and demonstrations that can be done in a hardware store. *Brain research bulletin*, 75(6):742–52, Apr. 2008. ISSN 0361-9230. doi:10.1016/j.brainresbull.2008.01.008. URL  
<http://www.sciencedirect.com/science/article/pii/S0361923008000178>. → pages 12, 24, 49, 50, 92
- [109] V. Hayward. Tactile Illusions. In *Scholarpedia of Touch*, pages 327–342. Atlantis Press, Paris, 2016. doi:10.2991/978-94-6239-133-8\_27. URL  
[http://link.springer.com/10.2991/978-94-6239-133-8\\_{-}27](http://link.springer.com/10.2991/978-94-6239-133-8_{-}27). → pages 12, 153
- [110] V. Hayward and K. Maclean. Do it yourself haptics: part I. *IEEE Robotics & Automation Magazine*, 14(4):88–104, Dec. 2007. ISSN 1070-9932.

doi:10.1109/M-RA.2007.907921. URL  
<http://ieeexplore.ieee.org/xpl/articleDetails.jsp?arnumber=4437756>. →  
pages 3, 4, 9, 24

- [111] J. Heer and M. Bostock. Crowdsourcing graphical perception. In *Proceedings of the 28th international conference on Human factors in computing systems - CHI '10*, page 203, New York, New York, USA, apr 2010. ACM Press. ISBN 9781605589299. doi:10.1145/1753326.1753357. URL <http://dl.acm.org/citation.cfm?id=1753326.1753357>. → pages 94
- [112] F. Hemmert and G. Joost. Ambient Life: Calm and Excited Pulsation as a Means of Life-like Permanent Tactile Status Display in Mobile Phones. In P. Desmet, S. Tzvetanova, P. Hekkert, and L. Justice, editors, *Proceedings from the 6th Conference on Design & Emotion 2008*. School of Design, The Hong Kong Polytechnic University SAR, oct 2008. ISBN 978-988-17489-2-8. → pages 17
- [113] S. R. Herring, C.-C. Chang, J. Krantzler, and B. P. Bailey. Getting inspired! Understanding How and Why Examples are Used in Creative Design Practice. In *CHI '09*, pages 87–96, New York, New York, USA, Apr. 2009. ACM Press. ISBN 9781605582467. doi:10.1145/1518701.1518717. URL <http://dl.acm.org/citation.cfm?id=1518701.1518717>. → pages 19, 20, 50, 71, 74, 151, 152
- [114] E. Hoggan, C. Stewart, L. Haverinen, G. Jacucci, and V. Lantz. Pressages: augmenting phone calls with non-verbal messages. pages 555–562, oct 2012. doi:10.1145/2380116.2380185. URL <http://dl.acm.org/citation.cfm?id=2380116.2380185>. → pages 16, 95
- [115] M. Hollins, R. Faldowski, S. Rao, and F. Young. Perceptual dimensions of tactile surface texture: A multidimensional scaling analysis. *Perception & Psychophysics*, 54(6):697–705, Nov. 1993. ISSN 0031-5117. doi:10.3758/BF03211795. URL <http://www.springerlink.com/index/10.3758/BF03211795>. → pages 92
- [116] M. Hollins, S. Bensmaïa, K. Karlof, and F. Young. Individual differences in perceptual space for tactile textures: Evidence from multidimensional scaling. *Perception & Psychophysics*, 62(8):1534–1544, dec 2000. ISSN 0031-5117. doi:10.3758/BF03212154. URL <http://www.springerlink.com/index/10.3758/BF03212154>. → pages 73, 148
- [117] K. Hong, J. Lee, and S. Choi. Demonstration-based vibrotactile pattern authoring. In *TEI '13*, page 219, New York, New York, USA, Feb. 2013.

- ACM Press. ISBN 9781450318983. doi:10.1145/2460625.2460660. URL <http://dl.acm.org/citation.cfm?id=2460625.2460660>. → pages 22, 51, 155
- [118] E. Hutchins. *Cognition in the Wild*, volume 19. MIT Press, 1995. ISBN 0262082314. doi:10.1098/rsbl.2011.0352. URL <http://www.ida.liu.se/~nilda/CST-papers/Hutchins.pdf>. → pages 19
  - [119] I. Hwang and S. Choi. Subject-specific distortions in haptic perception of force direction. In *EuroHaptics 2014, Part I, LNCS*, volume 8618, pages 48–232–240, 2014. ISBN 978-3-662-44192-3.  
doi:10.1007/978-3-662-44193-0. URL <http://link.springer.com/10.1007/978-3-662-44193-0>. → pages 23
  - [120] I. Hwang, K. E. Maclean, M. Brehmer, J. Hendy, A. Sotirakopoulos, and S. Choi. The Haptic Crayola Effect: Exploring the Role of Naming in Learning Haptic Stimuli. pages 385–390, 2011. ISBN 9781457702983. → pages 93
  - [121] I. Hwang, J. Seo, M. Kim, and S. Choi. Vibrotactile Perceived Intensity for Mobile Devices as a Function of Direction, Amplitude, and Frequency. *IEEE Transactions on Haptics*, 6(3):352–362, July 2013. ISSN 1939-1412.  
doi:10.1109/TOH.2013.2. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6420831>. → pages 90
  - [122] W. IJsselsteijn. Presence in the past: What can we learn from media history? In *Being There - Concepts, Effects and Measurements of User Presence in Synthetic Environments*, pages 17–40. IOS Press, Amsterdam, 2003. → pages 14, 48
  - [123] Immersion Corporation. Immersion. URL [immersion.com](http://immersion.com). Accessed: 2016-10-07. → pages 71
  - [124] A. Israr and I. Poupyrev. Exploring surround haptics displays. In *Proceedings of the 28th of the international conference extended abstracts on Human factors in computing systems - CHI EA '10*, pages 4171–4176, New York, New York, USA, apr 2010. ACM Press. ISBN 9781605589305.  
doi:10.1145/1753846.1754121. URL <http://dl.acm.org/citation.cfm?id=1753846.1754121>. → pages 10
  - [125] A. Israr and I. Poupyrev. Tactile brush: drawing on skin with a tactile grid display. In *CHI '11*, pages 2019–2028, Vancouver, BC, May 2011. ACM Press. ISBN 9781450302289. doi:10.1145/1978942.1979235. URL

<http://dl.acm.org/citation.cfm?id=1978942.1979235>. → pages 12, 47, 49, 51, 54, 55, 58, 59, 73, 85, 92

- [126] A. Israr, I. Poupyrev, C. Ioffreda, J. Cox, N. Gouveia, H. Bowles, A. Brakis, B. Knight, K. Mitchell, and T. Williams. Surround Haptics: Sending Shivers Down Your Spine. In *SIGGRAPH Emerging Technologies*, Vancouver, Canada, Aug. 2011. ISBN 9781450309691. doi:10.1145/2048259.2048273. URL <http://dl.acm.org/citation.cfm?id=2048259.2048273>. → pages 47, 48
- [127] A. Israr, S.-C. Kim, J. Stec, and I. Poupyrev. Surround haptics: tactile feedback for immersive gaming experiences. In *CHI EA '12*, pages 1087–1090, New York, New York, USA, May 2012. ACM Press. ISBN 9781450310161. doi:10.1145/2212776.2212392. URL <http://dl.acm.org/citation.cfm?id=2212776.2212392>. → pages 10
- [128] A. Israr, S. Zhao, K. Schwalje, R. Klatzky, and J. Lehman. Feel Effects: Enriching Storytelling with Haptic Feedback. *Transactions on Applied Perception (TAP)*, 11(3), 2014. → pages 23, 25, 71, 74, 90, 93, 116, 118, 120, 121, 122, 155, 202, 203
- [129] A. Israr, S. Zhao, and O. Schneider. Exploring Embedded Haptics for Social Networking and Interactions. In *CHI Extended Abstracts '15*, pages 1899–1904, New York, New York, USA, Apr. 2015. ACM Press. ISBN 9781450331463. doi:10.1145/2702613.2732814. URL <http://dl.acm.org/citation.cfm?id=2702613.2732814>. → pages vii, 95, 98, 100, 115
- [130] S. Jang, L. H. Kim, K. Tanner, H. Ishii, and S. Follmer. Haptic Edge Display for Mobile Tactile Interaction. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems - CHI '16*, pages 3706–3716, New York, New York, USA, 2016. ACM Press. ISBN 9781450333627. doi:10.1145/2858036.2858264. URL <http://dl.acm.org/citation.cfm?doid=2858036.2858264>. → pages 10
- [131] C. V. Jansson-Boyd. Touch matters: exploring the relationship between consumption and tactile interaction. *Social Semiotics*, 21(4):531–546, Sept. 2011. ISSN 1035-0330. doi:10.1080/10350330.2011.591996. URL <http://dx.doi.org/10.1080/10350330.2011.591996>. → pages 3, 14, 26, 33, 44, 90, 94, 146, 154
- [132] J. Johnson and A. Henderson. Conceptual models: begin by designing what to design. *Interactions*, 9(1):25–32, Jan. 2002. ISSN 10725520.

doi:10.1145/503355.503366. URL  
[http://dl.acm.org/ft\\_gateway.cfm?id=503366&type=html](http://dl.acm.org/ft_gateway.cfm?id=503366&type=html). → pages 50

- [133] J. Johnson and A. Henderson. Conceptual models: begin by designing what to design. *Interactions*, 9(1):25–32, 2002. → pages 130
- [134] L. Jones. News from the Field: Courses in Haptics. *Transactions on Haptics*, 7(4):413–414, 2014. → pages 11, 25, 154, 187
- [135] L. Jones, M. Nakamura, and B. Lockyer. Development of a tactile vest. In *HAPTICS '04*, pages 82–89. IEEE, 2004. ISBN 0-7695-2112-6.  
doi:10.1109/HAPTIC.2004.1287181. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=1287181>. → pages 10, 47
- [136] L. A. Jones and D. A. Held. Characterization of Tactors Used in Vibrotactile Displays. *Journal of Computing and Information Science in Engineering*, 8(4):044501, 2008. ISSN 15309827. doi:10.1115/1.2988384.  
URL <http://computingengineering.asmedigitalcollection.asme.org/article.aspx?articleid=1401367>. → pages 122
- [137] L. A. Jones and I. W. Hunter. A perceptual analysis of stiffness. *Experimental brain research*, 79(1):150, 1990. → pages 135
- [138] L. A. L. Jones and M. Berris. The psychophysics of temperature perception and thermal-interface design. In *Proceedings 10th Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems. HAPTICS 2002*, pages 137–142. IEEE Comput. Soc, mar 2002. ISBN 0-7695-1489-8. doi:10.1109/HAPTIC.2002.998951. URL  
<http://dl.acm.org/citation.cfm?id=795682.797526http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=998951>. → pages 10, 153
- [139] T. Kaaresoja and J. Linjama. Perception of Short Tactile Pulses Generated by a Vibration Motor in a Mobile Phone. In *First Joint Eurohaptics Conference and Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems*, pages 471–472. IEEE, 2005. ISBN 0-7695-2310-2. doi:10.1109/WHC.2005.103. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=1406972>. → pages 95
- [140] T. Kaaresoja, S. Brewster, and V. Lantz. Towards the Temporally Perfect Virtual Button: Touch-Feedback Simultaneity and Perceived Quality in

Mobile Touchscreen Press Interactions. *ACM Transactions on Applied Perception*, 11(2):1–25, jun 2014. ISSN 15443558. doi:10.1145/2611387. URL <http://dl.acm.org/citation.cfm?doid=2633908.2611387>. → pages 148, 153, 162

- [141] E. R. Kandel, J. H. Schwartz, and T. M. Jessell. *Principles of Neural Science*. McGraw-Hill, 4th edition, 2000. → pages 3, 11, 152, 153, 160
- [142] I. Karuei and K. E. MacLean. Susceptibility to periodic vibrotactile guidance of human cadence. In *2014 IEEE Haptics Symposium (HAPTICS)*, pages 141–146. IEEE, feb 2014. ISBN 978-1-4799-3131-6. doi:10.1109/HAPTICS.2014.6775446. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6775446>. → pages 17
- [143] I. Karuei, K. E. MacLean, Z. Foley-Fisher, R. MacKenzie, S. Koch, and M. El-Zohairy. Detecting vibrations across the body in mobile contexts. In *Proceedings of the 2011 annual conference on Human factors in computing systems - CHI '11*, page 3267, New York, New York, USA, 2011. ACM Press. ISBN 9781450302289. doi:10.1145/1978942.1979426. URL <http://dl.acm.org/citation.cfm?doid=1978942.1979426>. → pages 3, 13
- [144] M. Kim, S. Lee, and S. Choi. Saliency-driven real-time video-to-tactile translation. *IEEE transactions on haptics*, 7(3):394–404, jan 2014. ISSN 2329-4051. doi:10.1109/TOH.2013.58. URL <http://www.ncbi.nlm.nih.gov/pubmed/25248221>. → pages 23, 67
- [145] Y. Kim, J. Cha, I. Oakley, and J. Ryu. Exploring Tactile Movies: An Initial Tactile Glove Design and Concept Evaluation. *IEEE Multimedia*, PP(99):1, 2009. ISSN 1070-986X. doi:10.1109/MMUL.2009.63. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=5255212>. → pages 10, 15, 23, 25, 47, 48, 50, 51, 95, 154, 155
- [146] A. Kittur, E. H. Chi, and B. Suh. Crowdsourcing user studies with Mechanical Turk. In *Proceedings of the SIGCHI conference on human factors in computing systems*, pages 453–456. ACM, 2008. → pages 94
- [147] E. Koskinen, T. Kaaresoja, and P. Laitinen. Feel-good touch: finding the most pleasant tactile feedback for a mobile touch screen button. In *Proceedings of the 10th international conference on Multimodal interfaces*, pages 297–304, 2008. URL <http://dl.acm.org/citation.cfm?id=1452453>. → pages 93

- [148] K. Kuchenbecker, J. Fiene, and G. Niemeyer. Improving contact realism through event-based haptic feedback. *IEEE Transactions on Visualization and Computer Graphics*, 12(2):219–230, mar 2006. ISSN 1077-2626. doi:10.1109/TVCG.2006.32. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=1580456>. → pages 11
- [149] C. Kulkarni, S. P. Dow, and S. R. Klemmer. Early and Repeated Exposure to Examples Improves Creative Work. In *Design Thinking Research*, pages 49–62. Springer International Publishing, Cham, 2014. ISBN 978-3-642-31990-7, 978-3-642-31991-4. doi:10.1007/978-3-642-21643-5. → pages 27, 151, 199
- [150] R. Kumar, J. O. Talton, S. Ahmad, and S. R. Klemmer. Bricolage: example-based retargeting for web design. In *Proceedings of the 2011 annual conference on Human factors in computing systems - CHI '11*, pages 2197–2206, New York, New York, USA, may 2011. ACM Press. ISBN 9781450302289. doi:10.1145/1978942.1979262. URL <http://dl.acm.org/citation.cfm?id=1978942.1979262>. → pages 74
- [151] S. J. Lederman and R. L. Klatzky. Hand movements: A window into haptic object recognition. *Cognitive Psychology*, 19(3):342–368, jul 1987. ISSN 00100285. doi:10.1016/0010-0285(87)90008-9. URL <http://www.sciencedirect.com/science/article/pii/0010028587900089>. → pages 9, 14, 153, 160
- [152] S. J. Lederman and R. L. Klatzky. Haptic perception: A tutorial. *Attention, Perception & Psychophysics*, 71(7):1439–1459, oct 2009. ISSN 1943-3921. doi:10.3758/APP.71.7.1439. URL <http://www.springerlink.com/index/10.3758/APP.71.7.1439>. → pages 3, 9, 153
- [153] D. Ledo, M. A. Nacenta, N. Marquardt, S. Boring, and S. Greenberg. The HapticTouch toolkit. In *TEI '12*, pages 115–122, New York, USA, Feb. 2012. ACM Press. ISBN 9781450311748. doi:10.1145/2148131.2148157. URL <http://dl.acm.org/citation.cfm?id=2148131.2148157>. → pages 23, 30, 33, 155
- [154] B. Lee, S. Srivastava, R. Kumar, R. Brafman, and S. R. Klemmer. Designing with interactive example galleries. In *CHI '10*, pages 2257–2266, New York, New York, USA, Apr. 2010. ACM Press. ISBN 9781605589299. doi:10.1145/1753326.1753667. URL

<http://dl.acm.org/citation.cfm?id=1753326.1753667>. → pages 28, 71, 72, 74, 75, 84

- [155] J. Lee and S. Choi. Evaluation of vibrotactile pattern design using vibrotactile score. In *HAPTICS '12*, pages 231–238. IEEE, Mar. 2012. ISBN 978-1-4673-0809-0. doi:10.1109/HAPTIC.2012.6183796. URL [http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=6183796](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=6183796). → pages 22, 25, 32, 44, 50, 51, 155
- [156] J. Lee and S. Choi. Real-time perception-level translation from audio signals to vibrotactile effects. In *CHI '13*, pages 2567–2576, Paris, France, Apr. 2013. ISBN 9781450318990. doi:10.1145/2470654.2481354. URL <http://dl.acm.org/citation.cfm?id=2470654.2481354>. → pages 23, 50, 117
- [157] J. Lee, J. Ryu, and S. Choi. Vibrotactile score: A score metaphor for designing vibrotactile patterns. In *World Haptics '09*, pages 302–307. IEEE, Mar. 2009. ISBN 978-1-4244-3858-7. doi:10.1109/WHC.2009.4810816. URL [http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=4810816](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4810816). → pages 22, 25, 30, 32, 44, 155
- [158] J. Lee, Y. Kim, and G. Kim. Funneling and saltation effects for tactile interaction with virtual objects. In *CHI '12*, page 3141, New York, New York, USA, May 2012. ACM Press. ISBN 9781450310154. doi:10.1145/2207676.2208729. URL <http://dl.acm.org/citation.cfm?id=2207676.2208729>. → pages 12, 49, 54
- [159] V. Levesque and V. Hayward. Experimental evidence of lateral skin strain during tactile exploration. In *Proceedings of EUROHAPTICS*, volume 2003, 2003. → pages 14
- [160] V. Levesque, L. Oram, K. MacLean, A. Cockburn, N. D. Marchuk, D. Johnson, J. E. Colgate, and M. A. Peshkin. Enhancing physicality in touch interaction with programmable friction. In *Proceedings of the 2011 annual conference on Human factors in computing systems (CHI '11)*, pages 2481–2490, New York, USA, May 2011. ACM Press. ISBN 9781450302289. doi:10.1145/1978942.1979306. URL <http://dl.acm.org/citation.cfm?id=1978942.1979306>. → pages 10, 146, 148, 153
- [161] D. J. Levitin, K. MacLean, M. Mathews, L. Chu, and E. Jensen. The perception of cross-modal simultaneity. *International Journal of Computing and Anticipatory Systems*, 5:323–329, 2000. → pages 4, 162

- [162] R. W. Lindeman, J. L. Sibert, E. Mendez-Mendez, S. Patil, and D. Phifer. Effectiveness of directional vibrotactile cuing on a building-clearing task. In *Proceedings of the SIGCHI conference on Human factors in computing systems - CHI '05*, page 271, New York, New York, USA, 2005. ACM Press. ISBN 1581139985. doi:10.1145/1054972.1055010. URL <http://portal.acm.org/citation.cfm?doid=1054972.1055010>. → pages 17
- [163] P. Lopes, A. Ion, and P. Baudisch. Impacto: Simulating physical impact by combining tactile stimulation with electrical muscle stimulation. In *Proceedings of the 28th Annual ACM Symposium on User Interface Software & Technology - UIST '15*, pages 11–19, New York, New York, USA, 2015. ACM Press. ISBN 9781450337793. doi:10.1145/2807442.2807443. URL <http://dl.acm.org/citation.cfm?doid=2807442.2807443>. → pages 15
- [164] J. Lofvenberg and R. Johansson. Regional differences and interindividual variability in sensitivity to vibration in the glabrous skin of the human hand. *Brain Research*, 301(1):65–72, 1984. ISSN 00068993. doi:10.1016/0006-8993(84)90403-7. → pages 3, 148
- [165] J. Luk, J. Pasquero, S. Little, K. MacLean, V. Levesque, and V. Hayward. A role for haptics in mobile interaction: initial design using a handheld tactile display prototype. In *Proceedings of the SIGCHI conference on Human Factors in computing systems - CHI '06*, page 171, New York, New York, USA, apr 2006. ACM Press. ISBN 1595933727. doi:10.1145/1124772.1124800. URL <http://dl.acm.org/citation.cfm?id=1124772.1124800>. → pages 10, 14
- [166] K. Maclean and M. Enriquez. Perceptual design of haptic icons. In *Eurohaptics*, pages 351–363, 2003. URL <http://citeseer.ist.psu.edu/viewdoc/summary?doi=10.1.1.138.6172>. → pages 17, 25, 73, 90, 122, 124, 189
- [167] K. MacLean and V. Hayward. Do It Yourself Haptics: Part II [Tutorial]. *IEEE Robotics & Automation Magazine*, 15(1):104–119, Mar. 2008. ISSN 1070-9932. doi:10.1109/M-RA.2007.914919. URL [http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=4476335](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4476335). → pages 24
- [168] K. E. MacLean. The 'Haptic Camera': a Technique for Characterising and Playing Back Haptic Properties of Real Environments. In *HAPTICS '96*, Atlanta, GA, 1996. → pages 200

- [169] K. E. MacLean. Foundations of transparency in tactile information design. *IEEE Transactions on Haptics*, 1(2):84–95, 2008. → pages 73, 92
- [170] K. E. MacLean. Putting Haptics into the Ambience. *IEEE Transactions on Haptics*, 2(3):123–135, July 2009. ISSN 1939-1412.  
doi:10.1109/TOH.2009.33. URL  
<http://www.computer.org/portal/web/csdl/doi?doc=doi/10.1109/TOH.2009.33>  
<http://portal.acm.org/citation.cfm?id=1608573.1608735>. → pages 24, 146
- [171] K. E. MacLean, M. J. Enriquez, and T. Lim. Morphing in periodic tactile signals. In *World Haptics 2009*, pages 178–183. IEEE, 2009. ISBN 978-1-4244-3858-7. doi:10.1109/WHC.2009.4810844. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4810844>. → pages 11
- [172] S. Madelska. News from the Field: Coders and the Creative Unite to Design and Build Apps for Surface Haptics. *IEEE Transactions on Haptics*, 8(2):128–129, 2015. → pages 187
- [173] J. Maloney, M. Resnick, N. Rusk, B. Silverman, and E. Eastmond. The scratch programming language and environment. *Trans. Comput. Educ.*, 10(4):1–15, 2010. → pages 130
- [174] J. Marks, W. Ruml, K. Ryall, J. Seims, S. Shieber, B. Andelman, P. A. Beardsley, W. Freeman, S. Gibson, J. Hodgins, T. Kang, B. Mirtich, and H. Pfister. Design galleries. In *SIGGRAPH '97*, pages 389–400, New York, New York, USA, Aug. 1997. ACM Press. ISBN 0897918967.  
doi:10.1145/258734.258887. URL  
<http://dl.acm.org/citation.cfm?id=258734.258887>. → pages 72, 74, 75
- [175] T. Martin and D. L. Schwartz. Physically distributed learning: Adapting and reinterpreting physical environments in the development of fraction concepts. *Cognitive science*, 29(4):587–625, 2005. → pages 130
- [176] W. Mason and S. Suri. Conducting behavioral research on Amazon’s Mechanical Turk. *Behavior research methods*, 44(1):1–23, 2012. → pages 94, 107
- [177] T. H. Massie and J. K. Salisbury. The phantom haptic interface: A device for probing virtual objects. In *Proceedings of the ASME winter annual meeting, symposium on haptic interfaces for virtual environment and*

*teleoperator systems*, volume 55, pages 295–300. Chicago, IL, 1994. →  
pages 11

- [178] S. McCloud. Understanding comics: The invisible art. *Northampton, Mass*, 1993. → pages 203
- [179] D. J. Meyer, M. A. Peshkin, and J. E. Colgate. Fingertip friction modulation due to electrostatic attraction. In *2013 World Haptics Conference (WHC)*, pages 43–48. IEEE, apr 2013. ISBN 978-1-4799-0088-6. doi:10.1109/WHC.2013.6548382. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6548382>. → pages 10
- [180] D. J. Meyer, M. A. Peshkin, and J. E. Colgate. Tactile Paintbrush: A procedural method for generating spatial haptic texture. In *2016 IEEE Haptics Symposium (HAPTICS)*, pages 259–264. IEEE, apr 2016. ISBN 978-1-5090-0903-9. doi:10.1109/HAPTICS.2016.7463187. URL <http://ieeexplore.ieee.org/articleDetails.jsp?arnumber=7463187>. → pages 22, 155
- [181] M.-H. Milot, L. Marchal-Crespo, C. S. Green, S. C. Cramer, and D. J. Reinkensmeyer. Comparison of error-amplification and haptic-guidance training techniques for learning of a timing-based motor task by healthy individuals. *Experimental brain research*, 201(2):119–31, mar 2010. ISSN 1432-1106. doi:10.1007/s00221-009-2014-z. URL <http://www.ncbi.nlm.nih.gov/pubmed/19787345>. → pages 146
- [182] G. Minaker, O. Schneider, R. Davis, and K. E. MacLean. *HandsOn: Enabling Embodied, Creative STEM e-learning with Programming-Free Force Feedback*, pages 427–437. Springer International Publishing, Cham, 2016. ISBN 978-3-319-42324-1. doi:10.1007/978-3-319-42324-1\_42. URL [http://dx.doi.org/10.1007/978-3-319-42324-1\\_42](http://dx.doi.org/10.1007/978-3-319-42324-1_42). → pages vii, 115
- [183] S. O. Modhrain and I. Oakley. Touch TV : Adding Feeling to Broadcast Media. 2001. → pages 15, 25, 95, 187, 202
- [184] M. Montessori. *The Advanced Montessori Method*. 1917. → pages 18, 129
- [185] C. Moussette. Sketching in Hardware and Building Interaction Design: tools, toolkits and an attitude for Interaction Designers. In *Proc. of Design Research Society*, 2010. URL <https://public.me.com/intuitive>. → pages 19, 25, 151, 154

- [186] C. Moussette and R. Banks. Designing through making. In *TEI '11*, pages 279–282, New York, USA, Jan. 2011. ACM Press. ISBN 9781450304788. doi:10.1145/1935701.1935763. URL <http://dl.acm.org/citation.cfm?id=1935701.1935763>. → pages 25, 33, 44, 50, 51, 154
- [187] C. Moustakas. *Phenomenological Research Methods*. SAGE Publications, Inc., 1994. ISBN 978-0-8039-5798-5. → pages 27, 33, 38, 63, 77, 156
- [188] T. Munzner. *Visualization Analysis and Design*. CRC Press, 2014. → pages 198
- [189] Myongchan Kim, S. Lee, and Seungmoon Choi. Saliency-Driven Tactile Effect Authoring for Real-Time Visuotactile Feedback. *Haptics: Perception, Devices, Mobility, and Communication*, 7282:258–269, 2012. doi:10.1007/978-3-642-31401-8. URL <http://www.springerlink.com/index/10.1007/978-3-642-31401-8>. → pages 117
- [190] D. A. Norman. *Emotional Design: Why We Love (or Hate) Everyday Things*. Basic Books, New York, NY, USA, 2004. → pages 147
- [191] M. Obrist, S. A. Seah, and S. Subramanian. Talking about tactile experiences. In *CHI '13*, pages 1659–1668. ACM Press, 2013. ISBN 9781450318990. doi:10.1145/2470654.2466220. URL <http://dl.acm.org/citation.cfm?doid=2470654.2466220>. → pages 10, 25, 27, 30, 34, 38, 44, 73, 90, 93, 154
- [192] M. Obrist, S. Subramanian, E. Gatti, B. Long, and T. Carter. Emotions Mediated Through Mid-Air Haptics. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems - CHI '15*, pages 2053–2062, New York, New York, USA, apr 2015. ACM Press. ISBN 9781450331456. doi:10.1145/2702123.2702361. URL <http://dl.acm.org/citation.cfm?id=2702123.2702361>. → pages 15, 73
- [193] S. Okamoto, H. Nagano, and Y. Yamada. Psychophysical Dimensions of Tactile Perception of Textures. *IEEE Transactions on Haptics*, 6(1):81–93, Jan. 2013. ISSN 1939-1412. doi:10.1109/TOH.2012.32. URL [http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=6216375](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=6216375). → pages 25, 33, 90, 154
- [194] A. Okamura, J. Dennerlein, and R. Howe. Vibration feedback models for virtual environments. In *Proceedings. 1998 IEEE International Conference*

- on Robotics and Automation (Cat. No.98CH36146)*, volume 1, pages 674–679. IEEE, 1998. ISBN 0-7803-4300-X.  
doi:10.1109/ROBOT.1998.677050. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=677050>. → pages 9
- [195] A. M. Okamura. Haptic feedback in robot-assisted minimally invasive surgery. *Current Opinion in Urology*, 19(1):102–107, 2009. URL  
<http://www.ncbi.nlm.nih.gov/pubmed/19057225>. → pages 11, 14
- [196] A. M. Okamura, S. Chan, B. Hannaford, K. MacLean, and W. Provancher. Best Practices for Teaching Haptics, 2012. → pages 25, 154
- [197] M. Orta Martinez, Minaker Gordon, R. L. Davis, O. Schneider, T. K. Morimoto, A. T. Taylor, A. C. Barron, K. MacLean, P. Blikstein, and A. M. Okamura. HandsOn with Hapkit 3.0: a creative STEM e-learning framework. In *HAPTICS '16 Demos*, 2016. → pages vii
- [198] M. Orta Martinez, T. K. Morimoto, A. T. Taylor, A. C. Barron, J. D. A. Pultorak, J. Wang, A. Calasanz-Kaiser, R. L. Davis, P. Blikstein, and A. M. Okamura. 3-D printed haptic devices for educational applications. In *2016 IEEE Haptics Symposium (HAPTICS)*, pages 126–133. IEEE, apr 2016. ISBN 978-1-5090-0903-9. doi:10.1109/HAPTICS.2016.7463166. URL  
<http://ieeexplore.ieee.org/articleDetails.jsp?arnumber=7463166>. → pages xxii, 11, 18, 130, 131, 135, 154, 205
- [199] S. A. Paneels, M. Anastassova, and L. Brunet. TactiPED: Easy Prototyping of Tactile Patterns. *INTERACT '13*, 8118:228–245, 2013.  
doi:10.1007/978-3-642-40480-1. URL  
<http://link.springer.com/10.1007/978-3-642-40480-1>. → pages 10, 23, 33, 47, 48, 50, 52, 155
- [200] S. Papert. *Mindstorms: Children, Computers, and Powerful Ideas*. Basic Books, 2nd edition, 1980. ISBN 0465046274. URL  
<http://books.google.com/books?id=HhIEAgUfGHwC&pgis=1>. → pages 14, 18, 129, 130, 202, 210
- [201] J. Park, J. Kim, Y. Oh, and H. Z. Tan. Rendering Moving Tactile Stroke on the Palm Using a Sparse 2D Array. pages 47–56. Springer International Publishing, 2016. doi:10.1007/978-3-319-42321-0\_5. URL  
[http://link.springer.com/10.1007/978-3-319-42321-0\\_5](http://link.springer.com/10.1007/978-3-319-42321-0_5). → pages 10

- [202] J. Pasquero, J. Luk, S. Little, and K. MacLean. Perceptual Analysis of Haptic Icons: an Investigation into the Validity of Cluster Sorted MDS. In *2006 14th Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems*, pages 437–444. IEEE, 2006. ISBN 1-4244-0226-3. doi:10.1109/HAPTIC.2006.1627122. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=1627122>. → pages 92
- [203] J. Piaget. Science of Education and the Psychology of the Child. *Orion*, 1970. → pages 129
- [204] M. Pielot, N. Henze, and S. Boll. Supporting map-based wayfinding with tactile cues. *Proceedings of the 11th International Conference on HumanComputer Interaction with Mobile Devices and Services MobileHCI 09*, page 1, 2009. doi:10.1145/1613858.1613888. URL <http://portal.acm.org/citation.cfm?doid=1613858.1613888>. → pages 10, 14, 17
- [205] H. Pongrac. Vibrotactile perception: examining the coding of vibrations and the just noticeable difference under various conditions. *Multimedia systems*, 13(4):297–307, 2008. → pages 92
- [206] M. Prasad, P. Taele, A. Olubeko, and T. Hammond. HaptiGo: A navigational tap on the shoulder'. In *2014 IEEE Haptics Symposium (HAPTICS)*, pages 339–345. IEEE, feb 2014. ISBN 978-1-4799-3131-6. doi:10.1109/HAPTICS.2014.6775478. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6775478>. → pages 10, 17
- [207] D. Prescher, G. Weber, and M. Spindler. A tactile windowing system for blind users. In *Proceedings of the 12th international ACM SIGACCESS conference on Computers and accessibility*, 12th International ACM SIGACCESS Conference on Computers and Accessibility, ASSETS’10, pages 91–98, New York, New York, USA, 2010. ACM. ISBN 9781605588810. doi:10.1145/1878803.1878821. URL <http://www.scopus.com/inward/record.url?eid=2-s2.0-78650615361{&}partnerID=40{&}md5=03aab42397cfcae7514aa54752490f023http://portal.acm.org/citation.cfm?doid=1878803.1878821>. → pages 10, 13
- [208] A. Pusch and A. Lécuyer. Pseudo-haptics: From the Theoretical Foundations to Practical System Design Guidelines. In *Proceedings of the 13th international conference on multimodal interfaces - ICMI ’11*,

- page 57, New York, USA, nov 2011. ACM Press. ISBN 9781450306416.  
doi:10.1145/2070481.2070494. URL  
<http://dl.acm.org/citation.cfm?id=2070481.2070494>. → pages 148
- [209] J. Raisamo, R. Raisamo, and V. Surakka. Comparison of Saltation, Amplitude Modulation, and a Hybrid Method of Vibrotactile Stimulation. *IEEE transactions on haptics*, 6(4):517–521, 2013. → pages 93
- [210] C. Ramstein and V. Hayward. The pantograph. In *Conference companion on Human factors in computing systems - CHI '94*, pages 57–58, New York, New York, USA, 1994. ACM Press. ISBN 0897916514.  
doi:10.1145/259963.260039. URL  
<http://portal.acm.org/citation.cfm?doid=259963.260039>. → pages 11
- [211] M. Resnick, B. Myers, K. Nakakoji, B. Shneiderman, R. Pausch, T. Selker, and M. Eisenberg. Design principles for tools to support creative thinking. In *NSF Workshop Report on Creativity Support Tools.*, Washington, DC, 2008. URL  
<http://medcontent.metapress.com/index/A65RM03P4874243N.pdf>. → pages 19, 20, 50, 151, 152, 206
- [212] P. Richer. A phenomenological analysis of the perception of geometric illusions. *Journal of Phenomenological Psychology*, 8(2):123–135, 1978.  
→ pages 27, 38
- [213] D. Ritchie, A. A. Kejriwal, and S. R. Klemmer. d.tour: Style-based Exploration of Design Example Galleries. In *Proceedings of the 24th annual ACM symposium on User interface software and technology - UIST '11*, pages 165–173, 2011. ISBN 9781450307161.  
doi:10.1145/2047196.2047216. URL  
<http://dl.acm.org/citation.cfm?id=2047196.2047216>. → pages 75
- [214] H. W. J. Rittel and M. M. Webber. Dilemmas in a general theory of planning. *Policy sciences*, 4(2):155–169, 1973. → pages 21
- [215] J. Rovan and R. Hayward. Typology of Tactile Sounds and their Synthesis in Gesture-Driven Computer Music Performance. *Trends in Gestural Control of Music*, pages 297–320, 2000. → pages 36
- [216] J. a. Russell, M. Lewicka, and T. Niit. A cross-cultural study of a circumplex model of affect. *Journal of Personality and Social Psychology*, 57(5):848–856, 1989. ISSN 0022-3514. doi:10.1037//0022-3514.57.5.848.

URL <http://doi.apa.org/getdoi.cfm?doi=10.1037/0022-3514.57.5.848>. → pages 15

- [217] J. a. Russell, A. Weiss, and G. a. Mendelsohn. Affect Grid: A single-item scale of pleasure and arousal. *Journal of Personality and Social Psychology*, 57(3):493–502, 1989. ISSN 0022-3514.  
doi:10.1037/0022-3514.57.3.493. URL  
<http://doi.apa.org/getdoi.cfm?doi=10.1037/0022-3514.57.3.493>. → pages 15
- [218] G. W. Ryan and H. R. Bernard. Techniques to Identify Themes. *Field Methods*, 15(1):85–109, feb 2003. ISSN 00000000.  
doi:10.1177/1525822X02239569. URL  
<http://fmx.sagepub.com/cgi/doi/10.1177/1525822X02239569>. → pages 156
- [219] J. Ryu and S. Choi. posVibEditor: Graphical authoring tool of vibrotactile patterns. In *HAVE '08*, pages 120–125. IEEE, Oct. 2008. ISBN 978-1-4244-2668-3. doi:10.1109/HAVE.2008.4685310. URL  
[http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=4685310](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=4685310). → pages 22, 49, 50, 73, 74, 155
- [220] J. Ryu, J. Jung, S. Kim, and S. Choi. Perceptually Transparent Vibration Rendering Using a Vibration Motor for Haptic Interaction. In *RO-MAN 2007 - The 16th IEEE International Symposium on Robot and Human Interactive Communication*, pages 310–315. IEEE, 2007. ISBN 978-1-4244-1634-9. doi:10.1109/ROMAN.2007.4415100. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4415100>. → pages 187
- [221] M. Sato, X. Liu, J. Murayama, K. Akahane, and M. Isshiki. A Haptic Virtual Environment for Molecular Chemistry Education. In *LNCS 5080: Transactions on Edutainment I*, pages 28–39. Springer Berlin Heidelberg, 2008. doi:10.1007/978-3-540-69744-2\_3. URL  
[http://link.springer.com/10.1007/978-3-540-69744-2\\_{-}3](http://link.springer.com/10.1007/978-3-540-69744-2_{-}3). → pages 18, 146
- [222] M. Sato, X. Liu, J. Murayama, K. Akahane, and M. Isshiki. A haptic virtual environment for molecular chemistry education. In *Transactions on edutainment I*, pages 28–39. Springer, 2008. → pages 130
- [223] O. Schneider and K. Maclean. HaXD'15: Workshop on Haptic Experience Design. In *World Haptics '15*, 2015. → pages viii

- [224] O. Schneider and K. MacLean. Macaron: An Online, Open-Source, Haptic Editor. In *HAPTICS '16 Demos (finalist for best demo)*, 2016. → pages v
- [225] O. Schneider, S. Zhao, and A. Israr. FeelCraft: User-Crafted Tactile Content. In *Proceedings of AsiaHaptics 2014*, 2014. → pages vi, 51, 71, 74, 114, 146, 155, 202
- [226] O. Schneider, A. Israr, and K. MacLean. Tactile Animation by Direct Manipulation of Grid Displays. In *UIST '15 Demos*, 2015. → pages v
- [227] O. Schneider, S. Zhao, and A. Israr. Feel Messenger: Embedded Haptics for Social Networking. In *World Haptics '15 Demos*, 2015. → pages vii, 115
- [228] O. S. Schneider and K. E. MacLean. Improvising Design with a Haptic Instrument. In *HAPTICS '14*, Houston, USA, 2014. → pages iv, 29, 50, 51, 73, 90, 118, 148, 155
- [229] O. S. Schneider and K. E. MacLean. Reflections on a WYFIWIF Design Tool. In *Workshop on Tactile User Experience Evaluation Methods at CHI 2014*, 2014. → pages iv
- [230] O. S. Schneider and K. E. MacLean. mHIVE: A WYFIWIF design tool. In *2014 IEEE Haptics Symposium (HAPTICS)*, pages 1–1. IEEE, feb 2014. ISBN 978-1-4799-3131-6. doi:10.1109/HAPTICS.2014.6775541. URL <http://ieeexplore.ieee.org/articleDetails.jsp?arnumber=6775541>. → pages iv
- [231] O. S. Schneider and K. E. MacLean. Studying Design Process and Example Use with Macaron, a Web-based Vibrotactile Effect Editor. In *HAPTICS '16: Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems*, 2016. → pages v, 70, 155
- [232] O. S. Schneider, K. E. MacLean, K. Altun, I. Karuei, and M. M. Wu. Real-time gait classification for persuasive smartphone apps. In *Proceedings of the 2013 international conference on Intelligent user interfaces - IUI '13*, page 161, New York, New York, USA, mar 2013. ACM Press. ISBN 9781450319652. doi:10.1145/2449396.2449418. URL <http://dl.acm.org/citation.cfm?id=2449396.2449418>. → pages 201
- [233] O. S. Schneider, A. Israr, and K. E. MacLean. Tactile Animation by Direct Manipulation of Grid Displays. In *UIST'15*, 2015. → pages v, 46, 73, 75, 85, 154, 155, 186, 188, 189

- [234] O. S. Schneider, H. Seifi, S. Kashani, M. Chun, and K. E. MacLean. HapTurk: Crowdsourcing Affective Ratings for Vibrotactile Icons. In *CHI '16*, pages 3248–3260, New York, New York, USA, may 2016. ACM Press. ISBN 9781450333627. doi:10.1145/2858036.2858279. URL <http://dl.acm.org/citation.cfm?id=2858036.2858279>. → pages vi, 89, 186
- [235] D. A. Schön. *The Reflective Practitioner*. 1982. → pages 6, 19, 21, 27, 74, 151, 184, 196, 197, 198, 210
- [236] D. Schuirmann. On hypothesis testing to determine if the mean of a normal distribution is contained in a known interval. *Biometrics*, 37(3):617–617, 1981. → pages 102
- [237] Y. S. Sefidgar, K. E. MacLean, S. Yohanan, H. M. Van der Loos, E. A. Croft, and E. J. Garland. Design and Evaluation of a Touch-Centered Calming Interaction with a Social Robot. *IEEE Transactions on Affective Computing*, 7(2):108–121, apr 2016. ISSN 1949-3045. doi:10.1109/TAFFC.2015.2457893. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7161320>. → pages 16, 142
- [238] H. Seifi and K. E. MacLean. A first look at individuals' affective ratings of vibrations. In *World Haptics Conference*, pages 605–610. IEEE, apr 2013. ISBN 978-1-4799-0088-6. doi:10.1109/WHC.2013.6548477. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6548477>. → pages 116, 148
- [239] H. Seifi, C. Anthonypillai, and K. E. MacLean. End-user customization of affective tactile messages: A qualitative examination of tool parameters. In *HAPTICS '14*, pages 251–256. IEEE, Feb. 2014. ISBN 978-1-4799-3131-6. doi:10.1109/HAPTICS.2014.6775463. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6775463>. → pages 3, 26, 51, 71, 74, 90, 116, 154, 202
- [240] H. Seifi, K. Zhang, and K. MacLean. VibViz: Organizing, visualizing and navigating vibration libraries. In *World Haptics '15*, 2015. → pages 3, 23, 26, 71, 73, 74, 75, 76, 84, 90, 93, 94, 95, 96, 97, 111, 142, 148, 154, 155, 202, 205
- [241] J. Seo and S. Choi. Initial study for creating linearly moving vibrotactile sensation on mobile device. In *HAPTICS '10*, pages 67–70. IEEE, Mar. 2010. ISBN 978-1-4244-6821-8. doi:10.1109/HAPTIC.2010.5444677.

URL

<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=5444677>.

→ pages 12

- [242] J. Seo and S. Choi. Perceptual analysis of vibrotactile flows on a mobile device. *IEEE transactions on haptics*, 6(4):522–7, jan 2013. ISSN 2329-4051. doi:10.1109/TOH.2013.24. URL <http://www.ncbi.nlm.nih.gov/pubmed/24808404> http://www.computer.org/csdl/trans/th/2013/04/tth2013040522.html. → pages 47, 49, 54, 59, 67, 73, 92
- [243] M. J. Shaver. *The Twiddler: A Haptic Teaching Tool: Low-Cost Communication and Mechanical Design*. PhD thesis, UBC, 2003. → pages 11
- [244] B. Shneiderman. Creating creativity: user interfaces for supporting innovation. *ACM Transactions on Computer-Human Interaction*, 7(1):114–138, Mar. 2000. ISSN 10730516. doi:10.1145/344949.345077. URL <http://dl.acm.org/citation.cfm?id=344949.345077>. → pages 19, 20, 151, 152
- [245] B. Shneiderman. Creativity support tools: accelerating discovery and innovation. *Communications of the ACM*, 50(12):20–32, dec 2007. ISSN 00010782. doi:10.1145/1323688.1323689. URL [http://dl.acm.org/ft{\\_-}gateway.cfm?id=1323689{&}type=html](http://dl.acm.org/ft{_-}gateway.cfm?id=1323689{&}type=html). → pages 199, 206, 208
- [246] C. D. Shultz, M. A. Peshkin, and J. E. Colgate. Surface haptics via electroadhesion: Expanding electrovibration with Johnsen and Rahbek. In *2015 IEEE World Haptics Conference (WHC)*, pages 57–62. IEEE, jun 2015. ISBN 978-1-4799-6624-0. doi:10.1109/WHC.2015.7177691. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7177691>. → pages 10
- [247] P. Siangliulue, K. C. Arnold, K. Z. Gajos, and S. P. Dow. Toward Collaborative Ideation at Scale - Leveraging Ideas from Others to Generate More Creative and Diverse Ideas. In *CSCW ’15*, pages 937–945, New York, New York, USA, feb 2015. ACM Press. ISBN 9781450329224. doi:10.1145/2675133.2675239. URL <http://dl.acm.org/citation.cfm?id=2675133.2675239>. → pages 91, 94
- [248] A. Singhal and L. A. Jones. Space-time interactions and the perceived location of cold stimuli. In *2016 IEEE Haptics Symposium (HAPTICS)*,

- pages 92–97. IEEE, apr 2016. ISBN 978-1-5090-0903-9.  
doi:10.1109/HAPTICS.2016.7463161. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7463161>. → pages 12
- [249] J. Smith and K. MacLean. Communicating emotion through a haptic link: Design space and methodology. *International Journal of Human-Computer Studies*, 65(4):376–387, apr 2007. ISSN 10715819.  
doi:10.1016/j.ijhcs.2006.11.006. URL  
<http://linkinghub.elsevier.com/retrieve/pii/S1071581906001911>. → pages 16
- [250] R. Sodhi, I. Poupyrev, M. Glisson, and A. Israr. AIREAL. *ACM Transactions on Graphics*, 32(4):1, July 2013. ISSN 07300301.  
doi:10.1145/2461912.2462007. URL  
<http://dl.acm.org/citation.cfm?id=2461912.2462007>. → pages 10, 47
- [251] C. Spence and A. Gallace. Multisensory design: Reaching out to touch the consumer. *Psychology and Marketing*, 28(3):267–308, mar 2011. ISSN 07426046. doi:10.1002/mar.20392. URL  
<http://doi.wiley.com/10.1002/mar.20392>. → pages 14
- [252] M. A. Srinivasan, G. L. Beauregard, and D. L. Brock. The impact of visual information on the haptic perception of stiffness in virtual environments. In *ASME Winter Annual Meeting*, volume 58, pages 555–559, 1996. → pages 12
- [253] J. C. Stevens. Aging and Spatial Acuity of Touch. *Journal of Gerontology*, 47(1):P35–P40, jan 1992. ISSN 0022-1422. doi:10.1093/geronj/47.1.P35. URL <http://geronj.oxfordjournals.org/cgi/doi/10.1093/geronj/47.1.P35>. → pages 3, 148
- [254] J. C. Stevens and K. K. Choo. Spatial Acuity of the Body Surface over the Life Span. *Somatosensory & Motor Research*, 13(2):153–166, 1996.  
doi:10.3109/08990229609051403. → pages 3, 148
- [255] S. Swaminathan, T. Roumen, R. Kovacs, D. Stangl, S. Mueller, and P. Baudisch. Linespace: A sensemaking platform for the blind. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems - CHI '16*, pages 2175–2185, New York, New York, USA, may 2016. ACM Press. ISBN 9781450333627. doi:10.1145/2858036.2858245. URL <http://dl.acm.org/citation.cfm?id=2858036.2858245>. → pages 210

- [256] B. A. Swerdleger, J. Fernquist, T. W. Hazelton, and K. E. MacLean. Exploring melodic variance in rhythmic haptic stimulus design. pages 133–140, may 2009. URL <http://dl.acm.org/citation.cfm?id=1555880.1555913>. → pages 73
- [257] C. Swindells, E. Maksakov, K. MacLean, and V. Chung. The Role of Prototyping Tools for Haptic Behavior Design. In *HAPTICS '06*, pages 161–168. IEEE, 2006. ISBN 1-4244-0226-3.  
doi:10.1109/HAPTIC.2006.1627084. URL [http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=1627084](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=1627084). → pages 22, 33, 49, 50, 73, 74, 85, 155
- [258] C. Swindells, S. Pietarinen, and A. Viitanen. Medium fidelity rapid prototyping of vibrotactile haptic, audio and video effects. In *HAPTICS '14*, pages 515–521. IEEE, Feb. 2014. ISBN 978-1-4799-3131-6.  
doi:10.1109/HAPTICS.2014.6775509. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6775509>  
<http://ieeexplore.ieee.org/articleDetails.jsp?arnumber=6775509>. → pages 22, 47, 49, 50, 73, 85, 155
- [259] D. Tam, K. E. MacLean, J. McGrenere, and K. J. Kuchenbecker. The design and field observation of a haptic notification system for timing awareness during oral presentations. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, pages 1689–1698. ACM, 2013. → pages 93
- [260] H. Tan, R. Gray, J. J. Young, and R. Taylor. A Haptic Back Display for Attentional and Directional Cueing. 2003. ISSN 1545-1143. → pages 17
- [261] H. Tan, A. Lim, and R. Taylor. A psychophysical study of sensory saltation with an open response paradigm. *international Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems*, 69: 1109–1115, 2009. → pages 12, 49
- [262] H. Z. Tan and A. Pentland. Tactual displays for wearable computing. *Personal Technologies*, 1(4):225–230, dec 1997. ISSN 0949-2054.  
doi:10.1007/BF01682025. URL <http://link.springer.com/10.1007/BF01682025>. → pages 17, 124
- [263] K. Tanie, S. Tachi, K. Komoriya, M. Abe, K. Asaba, and Y. Tomita. Information Transmission Characteristics of Two-Dimensional Electrocutaneous Phantom Sensation. *Transactions of the Society of Instrument and Control Engineers*, 16(5):732–739, 1980. → pages 12, 58

- [264] D. Ternes and K. E. MacLean. Designing Large Sets of Haptic Icons with Rhythm. *Haptics: Perception, Devices and Scenarios*, 5024:199–208, 2008. URL <http://www.springerlink.com/index/atl5686222k242m4.pdf>. → pages 17, 25, 32, 73, 90, 92, 93, 100
- [265] C. Torres, T. Campbell, N. Kumar, and E. Paulos. HapticPrint: Designing Feel Aesthetics for Digital Fabrication. In *Proceedings of the 28th Annual ACM Symposium on User Interface Software & Technology*, UIST ’15, pages 583–591, New York, NY, USA, 2015. ACM. ISBN 978-1-4503-3779-3. doi:10.1145/2807442.2807492. URL <http://doi.acm.org/10.1145/2807442.2807492>. → pages 200
- [266] D. Tsetserukou, A. Neviarouskaya, H. Prendinger, N. Kawakami, and S. Tachi. Affective haptics in emotional communication. In *Proc. ACII ’09*, pages 1–6, Sept. 2009. doi:10.1109/ACII.2009.5349516. URL [http://ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=5349516](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5349516). → pages 48
- [267] O. A. J. Van Der Meijden and M. P. Schijven. The value of haptic feedback in conventional and robot-assisted minimal invasive surgery and virtual reality training: a current review. *Surgical Endoscopy*, 23(6):1180–1190, 2009. URL <http://www.ncbi.nlm.nih.gov/pubmed/19118414>. → pages 11, 14
- [268] J. van Erp and M. Spapé. Distilling the underlying dimensions of tactile melodies. In *Proceedings of Eurohaptics*, pages 111–120, 2003. URL <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.182.7435&rep=rep1&type=pdf>. → pages 73, 92
- [269] C. Vaucelle, L. Bonanni, and H. Ishii. Design of haptic interfaces for therapy. In *CHI ’09*, page 467, New York, New York, USA, 2009. ACM Press. ISBN 9781605582467. doi:10.1145/1518701.1518776. URL <http://dl.acm.org/citation.cfm?doid=1518701.1518776>. → pages 16, 146
- [270] R. T. Verrillo and G. A. Gescheider. Perception via the sense of touch. *Tactile aids for the hearing impaired*, pages 1–36, 1992. → pages 59
- [271] A. Warr and E. O’Neill. Understanding design as a social creative process. In *Creativity & cognition - C&C ’05*, pages 118–127. ACM Press, Apr. 2005. ISBN 1595930256. doi:10.1145/1056224.1056242. URL <http://dl.acm.org/citation.cfm?id=1056224.1056242>. → pages 19, 20, 71, 74, 79, 85, 151, 152, 196

- [272] J. Watanabe, T. Hayakawa, S. Matsui, A. Kano, Y. Shimizu, and M. Sakamoto. Visualization of Tactile Material Relationships Using Sound Symbolic Words. In P. Isokoski and J. Springare, editors, *Haptics: Perception, Devices, Mobility, and Communication*, volume 7283 of *Lecture Notes in Computer Science*, pages 175–180. Springer, Berlin, Heidelberg, 2012. ISBN 978-3-642-31403-2.  
doi:10.1007/978-3-642-31404-9. URL  
<http://www.springerlink.com/index/10.1007/978-3-642-31404-9>. → pages 44, 142
- [273] C. E. Wieman, W. K. Adams, and K. K. Perkins. PhET: Simulations that enhance learning. *Science*, 322:682–683, 2008. → pages 129
- [274] R. L. Williams, M. Srivastava, R. Conaster, and J. N. Howell. Implementation and evaluation of a haptic playback system. *Haptics-e*, 3: 160–176, 2004. → pages 130
- [275] G. Wilson, T. Carter, S. Subramanian, and S. A. Brewster. Perception of ultrasonic haptic feedback on the hand. In *CHI '14*, pages 1133–1142, New York, New York, USA, Apr. 2014. ACM Press. ISBN 9781450324731.  
doi:10.1145/2556288.2557033. URL  
<http://dl.acm.org/citation.cfm?id=2611105.2557033>. → pages 47, 48, 67
- [276] L. Winfield, J. Glassmire, J. E. Colgate, and M. Peshkin. T-PaD: Tactile Pattern Display through Variable Friction Reduction. In *Second Joint EuroHaptics Conference and Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems (WHC'07)*, pages 421–426. IEEE, mar 2007. ISBN 0-7695-2738-8. doi:10.1109/WHC.2007.105. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4145211>. → pages 10, 126, 146, 153
- [277] K. N. Winfree, J. Gewirtz, T. Mather, J. Fiene, and K. J. Kuchenbecker. A high fidelity ungrounded torque feedback device: The iTorqU 2.0. In *World Haptics 2009 - Third Joint EuroHaptics conference and Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems*, pages 261–266. IEEE, 2009. ISBN 978-1-4244-3858-7.  
doi:10.1109/WHC.2009.4810866. URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4810866>. → pages 146
- [278] A. Xu, S.-W. Huang, and B. Bailey. Voyant: Generating Structured Feedback on Visual Designs Using a Crowd of Non-Experts. In

*Proceedings of the 17th ACM conference on Computer supported cooperative work & social computing - CSCW '14*, pages 1433–1444, New York, New York, USA, feb 2014. ACM Press. ISBN 9781450325400.  
doi:10.1145/2531602.2531604. URL  
<http://dl.acm.org/citation.cfm?id=2531602.2531604>. → pages 91, 94

- [279] H.-Y. Yao and V. Hayward. Design and analysis of a recoil-type vibrotactile transducer. *The Journal of the Acoustical Society of America*, 128(2):619–627, Aug. 2010. ISSN 1520-8524. doi:10.1121/1.3458852. URL <http://link.aip.org/link/?JASMAN/128/619/1>. → pages 9, 36, 153, 189
- [280] K. Yatani and K. N. Truong. SemFeel: a user interface with semantic tactile feedback for mobile touch-screens. In *Proceedings of the 22nd annual ACM symposium on User interface software and technology - UIST '09*, page 111, New York, New York, USA, 2009. ACM Press. ISBN 9781605587455. doi:10.1145/1622176.1622198. URL <http://portal.acm.org/citation.cfm?doid=1622176.1622198>. → pages 17
- [281] S. Yohanan and K. E. MacLean. A tool to study affective touch. In *Proceedings of the 27th international conference extended abstracts on Human factors in computing systems*, CHI EA '09, pages 4153–4158, New York, NY, USA, 2009. ACM. ISBN 978-1-60558-247-4.  
doi:<http://doi.acm.org/10.1145/1520340.1520632>. URL  
<http://doi.acm.org/10.1145/1520340.1520632>. → pages 16
- [282] S. Yohanan and K. E. MacLean. Design and assessment of the haptic creature's affect display. In *Proceedings of the 6th international conference on Human-robot interaction*, HRI '11, pages 473–480, New York, NY, USA, 2011. ACM. ISBN 978-1-4503-0561-7.  
doi:<http://doi.acm.org/10.1145/1957656.1957820>. URL  
<http://doi.acm.org/10.1145/1957656.1957820>. → pages 11, 142, 146, 194
- [283] S. Yohanan and K. E. MacLean. The Role of Affective Touch in Human-Robot Interaction: Human Intent and Expectations in Touching the Haptic Creature. *International Journal of Social Robotics*, 4(2):163–180, dec 2011. ISSN 1875-4791, 1875-4805. doi:10.1007/s12369-011-0126-7. URL <http://www.springerlink.com/index/10.1007/s12369-011-0126-7>. → pages 11, 15, 142, 194
- [284] S. Yohanan, M. Chan, J. Hopkins, H. Sun, and K. MacLean. Hapticat: exploration of affective touch. In *Proceedings of the 7th international conference on Multimodal interfaces*, ICMI '05, pages 222–229, New

- York, NY, USA, 2005. ACM. ISBN 1-59593-028-0.  
doi:<http://doi.acm.org/10.1145/1088463.1088502>. URL  
<http://doi.acm.org/10.1145/1088463.1088502>. → pages 16
- [285] Yongjae Yoo, Taekbeom Yoo, Jihyun Kong, and Seungmoon Choi. Emotional responses of tactile icons: Effects of amplitude, frequency, duration, and envelope. In *2015 IEEE World Haptics Conference (WHC)*, pages 235–240. IEEE, jun 2015. ISBN 978-1-4799-6624-0.  
doi:[10.1109/WHC.2015.7177719](https://doi.org/10.1109/WHC.2015.7177719). URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=7177719>. → pages 15, 73, 93
- [286] T. Yoo, Y. Yoo, and S. Choi. An Explorative Study on Crossmodal Congruence Between Visual and Tactile Icons Based on Emotional Responses. In *ICMI '14*, pages 96–103. ACM Press, Nov. 2014. ISBN 9781450328852. doi:[10.1145/2663204.2663231](https://doi.org/10.1145/2663204.2663231). URL  
<http://dl.acm.org/citation.cfm?id=2663204.2663231>. → pages 9
- [287] J. S. Zelek, S. Bromley, D. Asmar, and D. Thompson. A haptic glove as a tactile-vision sensory substitution for wayfinding. *Journal of Visual Impairment Blindness*, 97(10):621–632, 2003. ISSN 0145482X. URL  
<http://www.afb.org/JVIB/jvib971006.asp>. → pages 71
- [288] S. Zhao, O. Schneider, R. Klatzky, J. Lehman, and A. Israr. FeelCraft: Crafting Tactile Experiences for Media using a Feel Effect Library. In *UIST '14 Demos*, 2014. URL <http://dl.acm.org/citation.cfm?id=2659109>. → pages vi, 93, 114
- [289] Y. Zheng and J. B. Morrell. Haptic actuator design parameters that influence affect and attention. In *2012 IEEE Haptics Symposium (HAPTICS)*, pages 463–470. IEEE, Mar. 2012. ISBN 978-1-4673-0809-0.  
doi:[10.1109/HAPTIC.2012.6183832](https://doi.org/10.1109/HAPTIC.2012.6183832). URL  
<http://ieeexplore.ieee.org/articleDetails.jsp?arnumber=6183832>. → pages 25, 34, 44, 154
- [290] C. Zilles and J. Salisbury. A constraint-based god-object method for haptic display. In *Proceedings 1995 IEEE/RSJ International Conference on Intelligent Robots and Systems. Human Robot Interaction and Cooperative Robots*, volume 3, pages 146–151. IEEE Comput. Soc. Press, 1995. ISBN 0-8186-7108-4. doi:[10.1109/IROS.1995.525876](https://doi.org/10.1109/IROS.1995.525876). URL  
<http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=525876>. → pages 11

- [291] J. Zimmerman, J. Forlizzi, and S. Evenson. Research Through Design As a Method for Interaction Design Research in HCI. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '07, pages 493–502, New York, NY, USA, 2007. ACM. ISBN 978-1-59593-593-9. doi:10.1145/1240624.1240704. URL <http://doi.acm.org/10.1145/1240624.1240704>. → pages 18, 21, 26
- [292] J. Zimmerman, E. Stolterman, and J. Forlizzi. An analysis and critique of Research through Design: towards a formalization of a research approach. In *... of the 8th ACM Conference on ...*, pages 310–319, New York, New York, USA, aug 2010. ACM Press. ISBN 9781450301039. doi:10.1145/1858171.1858228. URL <http://dl.acm.org/citation.cfm?id=1858171.1858228> http://dl.acm.org/citation.cfm?id=1858228. → pages 21, 26

## **Appendix A**

# **Supporting Materials**

### **A.1 Study Forms**

#### **A.1.1 Primary Study Forms**

THE UNIVERSITY OF BRITISH COLUMBIA



Department of Computer Science  
201-2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

## Haptic Design Tools

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigator:** Oliver Schneider, Ph.D. Student, Dept. of Computer Science, [REDACTED]

Version 1.0 / 14 June, 2013

The following message will be used to recruit participants for our study. We will distribute this message using some or all of the following methods:

- Emailing the recruitment message to mailing lists maintained by the Computer Science department or our research group, such as a list of department graduate students (often used for this kind of purpose) and a list of persons who have expressed an interest in being study participants.
- Uploading the recruitment message as an online posting, on craigslist.ca or facebook.
- Physical postings in public areas.
- Email and word-of-mouth when conducting purposeful sampling.

From: Oliver Schneider

Subject: Call for Study Participants - \$10 for Haptic Design Tools

The SPIN Research Group in the UBC Dept. of Computer Science is looking for participants for a study investigating the design of haptic (sense of touch) phenomena. You will be compensated \$10 for your participation in a single 1-hour session.

We will ask you to talk about your experiences with haptic sensations, devices, and related technologies and training. We may ask you to interact with one or more haptic devices, such as the vibrations found in smartphones, or a force-feedback knob. We may also ask you to interact with a device for controlling these haptic devices, and ask you to create, manipulate, or describe haptic sensations using the tool.

Please visit <URL> or contact me to sign-up for the study.  
You may also contact me if you have any questions.

Oliver Schneider  
Ph.D. Student, UBC Computer Science  
[REDACTED]

THE UNIVERSITY OF BRITISH COLUMBIA



Department of Computer Science  
201-2366 Main Mall  
Vancouver, B.C., Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

## Haptic Design Tools

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigators:** Oliver Schneider, Ph.D. Student, Dept. of Computer Science, [REDACTED]

Paul Bucci, Undergraduate Student, Dept. of Computer Science, [REDACTED]

Version 1.1 / 8 May, 2015

The following message will be used to recruit participants for our study. We will distribute this message using some or all of the following methods:

- Emailing the recruitment message to mailing lists maintained by the Computer Science department or our research group, such as a list of department graduate students (often used for this kind of purpose) and a list of persons who have expressed an interest in being study participants.
- Uploading the recruitment message as an online posting, on craigslist.ca or facebook.
- Physical postings in public areas.
- Email and word-of-mouth when conducting purposeful sampling.

From: Oliver Schneider

Subject: Call for Study Participants - \$10 for Haptic Design Tools

The SPIN Research Group in the UBC Dept. of Computer Science is looking for participants for a study investigating the design of haptic (sense of touch) phenomena. You will be compensated \$10 for your participation in a single 1-hour session.

We will ask you to talk about your experiences with haptic sensations, devices, and related technologies and training. We may ask you to interact with one or more haptic devices, such as the vibrations found in smartphones, or a force-feedback knob. We may also ask you to interact with a device for controlling these haptic devices, and ask you to create, manipulate, or describe haptic sensations using the tool.

Please visit <URL> or contact me to sign-up for the study.  
You may also contact me if you have any questions.

Oliver Schneider  
Ph.D. Student, UBC Computer Science  
[REDACTED]



## STUDY CONSENT FORM

Department of Computer Science  
2366 Main Mall, Vancouver, BC, Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

**Project Title:** Investigation of Tools and Techniques for Haptic Design Processes  
(UBC Ethics #H13-01620)

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science [REDACTED]

**Co-Investigator:** Oliver Schneider, Ph.D. Student, Dept. of Computer Science [REDACTED]

The purpose of this study is to gather feedback to inform the design of haptic (sense of touch) design tools. We will ask you to talk about your experiences with haptic sensations, devices, and related technologies and training. We may ask you to interact with one or more haptic devices, such as the vibrations found in smartphones, or a force-feedback knob. We may also ask you to interact with a device for controlling these haptic devices, and ask you to create, manipulate, or describe haptic sensations using the tool.

You may refuse or skip any tool, task, or question without affecting your reimbursement.

**REIMBURSEMENT:** We are very grateful for your participation. You will receive monetary compensation of \$10 for this session.

**TIME COMMITMENT:** 1 × 1 hour session

**RISKS & BENEFITS:** This experiment contains no more risk than everyday computer use. There are no direct benefits to participants beyond compensation.

**CONFIDENTIALITY:** *You will not be identified by name in any study reports. Any identifiable data gathered from this experiment will be stored in a secure Computer Science account accessible only to the experimenters.*

**AUDIO/VIDEO RELEASE:** *You may be asked for audio or video to be recorded during this session. You are free to say no without affecting your reimbursement.*

I agree to have AUDIO recorded:  Yes  No

I agree to have VIDEO recorded:  Yes  No

I agree to have ANONYMOUS VIDEO OR AUDIO EXCERPTS presented with the findings:  Yes  No

You understand that the experimenter will ANSWER ANY QUESTIONS you have about the instructions or the procedures of this study. After participating, the experimenter will answer any other questions you have about this study. Your participation in this study is entirely voluntary and **you may refuse to participate or withdraw from the study at any time without jeopardy**. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in this study.

If you have any concerns about your treatment or rights as a research participant, you may contact the Research Subject Info Line in the UBC Office of Research Services at 604-822-8598.

---

You hereby CONSENT to participate and acknowledge RECEIPT of a copy of the consent form:

PRINTED NAME \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

Version 1.1 / July 11, 2013 / Page 1 of 1



## STUDY CONSENT FORM

Department of Computer Science  
2366 Main Mall, Vancouver, BC, Canada V6T 1Z4  
tel: [REDACTED] fax: [REDACTED]

**Project Title:** Investigation of Tools and Techniques for Haptic Design Processes  
(UBC Ethics #H13-01620)

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigators:** Oliver Schneider, Ph.D. Student, Dept. of Computer Science, [REDACTED]

Paul Bucci, Undergraduate Student, Dept. of Computer Science, [REDACTED]

The purpose of this study is to gather feedback to inform the design of haptic (sense of touch) design tools. We will ask you to talk about your experiences with haptic sensations, devices, and related technologies and training. We may ask you to interact with one or more haptic devices, such as the vibrations found in smartphones, or a force-feedback knob. We may also ask you to interact with a device for controlling these haptic devices, and ask you to create, manipulate, or describe haptic sensations using the tool.

You may refuse or skip any tool, task, or question without affecting your reimbursement.

**REIMBURSEMENT:** We are very grateful for your participation. You will receive monetary compensation of \$10 for this session.

**TIME COMMITMENT:** 1 × 1 hour session

**RISKS & BENEFITS:** This experiment contains no more risk than everyday computer use. There are no direct benefits to participants beyond compensation.

**CONFIDENTIALITY:** *You will not be identified by name in any study reports. Any identifiable data gathered from this experiment will be stored in a secure Computer Science account accessible only to the experimenters.*

**AUDIO/VIDEO RELEASE:** *You may be asked for audio or video to be recorded during this session. You are free to say no without affecting your reimbursement.*

I agree to have AUDIO recorded:  Yes  No

I agree to have VIDEO recorded:  Yes  No

I agree to have ANONYMOUS VIDEO OR AUDIO EXCERPTS presented with the findings:  Yes  No

You understand that the experimenter will ANSWER ANY QUESTIONS you have about the instructions or the procedures of this study. After participating, the experimenter will answer any other questions you have about this study. Your participation in this study is entirely voluntary and **you may refuse to participate or withdraw from the study at any time without jeopardy**. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in this study.

If you have any concerns about your treatment or rights as a research participant, you may contact the Research Subject Info Line in the UBC Office of Research Services at 604-822-8598.

---

You hereby CONSENT to participate and acknowledge RECEIPT of a copy of the consent form:

PRINTED NAME \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

Version 1.2 / May 8, 2015 / Page 1 of 1



## Follow-up Contact Form

Department of Computer Science  
2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

**Project Title:** *Investigation of Tools and Techniques for Haptic Design Processes*  
(UBC Ethics #H13-01620)

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science [REDACTED]

**Co-Investigator:** Oliver Schneider, Ph.D. Student, Dept. of Computer Science, [REDACTED]

As a part of our study process, we may want to contact you with our results for a brief conversation or email exchange some time after the study session. We want to make sure that our results accurately reflect your experience. This exchange is entirely optional and you are free to opt out at any time. If you consent to having us contact you after the study, please provide your contact information below. Your experimenter will be happy to answer any questions.

**Note: This information will be kept in a secure, encrypted file, which will be deleted when our study is completed. No physical copy will be kept.**

First name: \_\_\_\_\_

Email address: \_\_\_\_\_

Phone number (if no email address): \_\_\_\_\_



## Follow-up Contact Form

Department of Computer Science  
2366 Main Mall, Vancouver, BC, Canada V6T 1Z4  
tel: [REDACTED] fax: [REDACTED]

**Project Title:** *Investigation of Tools and Techniques for Haptic Design Processes*  
(*UBC Ethics #H13-01620*)

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigators:** Oliver Schneider, Ph.D. Student, Dept. of Computer Science, [REDACTED]  
Paul Bucci, Undergraduate Student, Dept. of Computer Science, [REDACTED]

As a part of our study process, we may want to contact you with our results for a brief conversation or email exchange some time after the study session. We want to make sure that our results accurately reflect your experience. This exchange is entirely optional and you are free to opt out at any time. If you consent to having us contact you after the study, please provide your contact information below. Your experimenter will be happy to answer any questions.

**Note:** This information will be kept in a secure, encrypted file, which will be deleted when our study is completed. No physical copy will be kept.

First name: \_\_\_\_\_

Email address: \_\_\_\_\_

Phone number (if no email address): \_\_\_\_\_

### **A.1.2 Tactile Animation Forms**

## **Study Consent Form - Rendering Study**

**Project title:** Haptic Animation Tools

**Investigators:** Ali Israr, Senior Research Engineer, Disney Research Pittsburgh  
Oliver Schneider, Laboratory Associate, Disney Research Pittsburgh

The purpose of this study is to gather feedback to inform the design of haptic (sense of touch) design tools. We will ask you to talk about your experiences with haptic sensations, devices, and related technologies and training. We may ask you to interact with one or more haptic devices, such as the vibrations found in smartphones. We may also ask you to interact with a device for controlling these haptic devices, and ask you to create, manipulate, or describe haptic sensations.

You may refuse or skip any tool, task, or question.

**REIMBURSEMENT:** We are very grateful for your participation, however, **you will not receive any compensation for this session.**

**TIME COMMITMENT:** 1 x 20 minute session

**RISKS & BENEFITS:** This experiment contains no more risk than everyday computer use.  
There are no direct benefits to participants.

**CONFIDENTIALITY:** *You will not be identified by name in any study reports. Data gathered from this experiment is completely anonymous.*

You understand that the experimenter will ANSWER ANY QUESTIONS you have about the instructions or the procedures of this study. After participating, the experimenter will answer any other questions you have about this study. **Your participation is entirely voluntary** and you may refuse to participate or withdraw from the study at any time without jeopardy. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in this study.

---

You hereby CONSENT to participate and acknowledge RECEIPT of a copy of the consent form:

PRINTED NAME \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

*Version 1.0 / Last Edited August 13, 2014 / Page 1 of 1*

## **Study Consent Form - Evaluation Study**

**Project title:** Haptic Animation Tools

**Investigators:** Ali Israr, Senior Research Engineer, Disney Research Pittsburgh  
Oliver Schneider, Laboratory Associate, Disney Research Pittsburgh

The purpose of this study is to gather feedback to inform the design of haptic (sense of touch) design tools. We will ask you to talk about your experiences with haptic sensations, devices, and related technologies and training. We may ask you to interact with one or more haptic devices, such as the vibrations found in smartphones. We may also ask you to interact with a device for controlling these haptic devices, and ask you to create, manipulate, or describe haptic sensations.

You may refuse or skip any tool, task, or question.

**REIMBURSEMENT:** We are very grateful for your participation, however, **you will not receive any compensation for this session.**

**TIME COMMITMENT:** 1 x 60 minute session

**RISKS & BENEFITS:** This experiment contains no more risk than everyday computer use.  
There are no direct benefits to participants.

**CONFIDENTIALITY:** *You will not be identified by name in any study reports. Any identifiable data gathered from this experiment will be stored in a secure, password protected location.*

**VIDEO/AUDIO:** *You may be asked for audio or video to be recorded during this session. You are free to say no at any time.*

I agree to have AUDIO recorded:  Yes  No

I agree to have VIDEO recorded:  Yes  No

You understand that the experimenter will ANSWER ANY QUESTIONS you have about the instructions or the procedures of this study. After participating, the experimenter will answer any other questions you have about this study. **Your participation is entirely voluntary** and you may refuse to participate or withdraw from the study at any time without jeopardy. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in this study.

You hereby CONSENT to participate and acknowledge RECEIPT of a copy of the consent form:

PRINTED NAME \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

*Version 1.0 / Last Edited August 20, 2014 / Page 1 of 1*

PID	Gender	Age	Hand	Experience with Haptics	Experience with animation tools

*Version 1.0 / Last Edited August 20, 2014 / Page 1 of 1*

### **A.1.3 HapTurk Forms**



## PARTICIPANT'S COPY CONSENT FORM

Department of Computer Science  
2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

### Project Title: Designing Affective Vibrotactile Stimuli

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigator:** Hasti Seifi, Graduate student, Dept. of Computer Science

Oliver Schneider, Ph.D. Student, Dept. of Computer Science

Salma Kashani, MSc., Dept. of Electrical and Computer Engineering

Matthew Chun, BSc., Dept. of Computer Science

The purpose of this project is to investigate how people design and describe vibration patterns with affective or aesthetic attributes for a handheld or wristband device. In this study, you will be invited to interact with one or more haptic devices, such as the vibrations found in smartphones or a wristband, or attend to a set of visual, auditory notifications and perform tasks such as grouping or describing them based on some criteria. We may also ask you to interact with a tool for controlling these haptic devices, and create or modify vibrations using the tool(s), to describe your process to us, and discuss your preferences and likings for the patterns you created as well as for the design tools you used. You will also be asked to provide general demographic information (e.g., your age), previous design activities and familiarity with tactile feedback.

You may be asked to wear headphones to mask external noises. Please tell the experimenter if you find the auditory level in the headphones uncomfortable, and it will be adjusted. If you are not sure about any instructions, do not hesitate to ask. Your responses will be audio recorded.

REIMBURSEMENT: \$10

TIME COMMITMENT: 1 × 60 minute session

CONFIDENTIALITY: *You will not be identified by name in any study reports. Data gathered from this experiment will be stored in a secure Computer Science account accessible only to the experimenters.*

You understand that the experimenters will ANSWER ANY QUESTIONS you have about the instructions or the procedures of this study. After participating, the experimenter will answer any other questions you have about this study.

Your participation in this study is entirely voluntary and you may refuse to participate or withdraw from the study at any time without jeopardy. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in this study.

If you have any concerns or complaints about your rights as a research participant and/or your experiences while participating in this study, contact the Research Participant Complaint Line in the UBC Office of Research Ethics at 604-822-8598 or if long distance e-mail RSIL@ors.ubc.ca or call toll free 1-877-822-8598 (Toll Free: 1-877-822-8598).



## RESEARCHER'S COPY CONSENT FORM

Department of Computer Science  
2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

### Project Title: Designing Affective Vibrotactile Stimuli

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science [REDACTED]

**Co-Investigator:** Hasti Seifi, Graduate Student, Dept. of Computer Science

Oliver Schneider, Ph.D. Student, Dept. of Computer Science

Salma Kashani, MSc., Dept. of Electrical and Computer Engineering

Matthew Chun, BSc., Dept. of Computer Science

The purpose of this project is to investigate how people design vibration patterns with affective or aesthetic attributes for a handheld or a wristband device. In this study, you will be invited to interact with one or more haptic devices, such as the vibrations found in smartphones or a wristband, and perform tasks such as grouping or describing haptic sensations. We may also ask you to interact with a tool for controlling these haptic devices, and to create or modify vibrations using the tool(s), to describe your process to us, and discuss your preferences and likings for the patterns you created as well as for the design tools you used. You will also be asked to provide general demographic information (e.g., your age), previous design activities and familiarity with tactile feedback.

You may be asked to wear headphones to mask external noises. Please tell the experimenter if you find the auditory level in the headphones uncomfortable, and it will be adjusted. If you are not sure about any instructions, do not hesitate to ask. Your responses will be audio recorded.

REIMBURSEMENT: \$10

TIME COMMITMENT: 1 × 60 minute session

CONFIDENTIALITY: *You will not be identified by name in any study reports. Data gathered from this experiment will be stored in a secure Computer Science account accessible only to the experimenters.*

You understand that the experimenters will ANSWER ANY QUESTIONS you have about the instructions or the procedures of this study. After participating, the experimenter will answer any other questions you have about this study.

Your participation in this study is entirely voluntary and you may refuse to participate or withdraw from the study at any time without jeopardy. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in this study.

If you have any concerns or complaints about your rights as a research participant and/or your experiences while participating in this study, contact the Research Participant Complaint Line in the UBC Office of Research Ethics at 604-822-8598 or if long distance e-mail RSIL@ors.ubc.ca or call toll free 1-877-822-8598 (Toll Free: 1-877-822-8598).

---

You hereby CONSENT to participate and acknowledge RECEIPT of a copy of the consent form:

PRINTED NAME \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

THE UNIVERSITY OF BRITISH COLUMBIA



Department of Computer Science  
201-2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

## Designing Affective Vibrotactile Stimuli

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigator:** Hasti Seifi, Graduate Student, Dept. of Computer Science

Oliver Schneider, Ph.D. Student, Dept. of Computer Science

Salma Kashani, MSc., Dept. of Electrical and Computer Engineering

Matthew Chun, BSc., Dept. of Computer Science

Version 1.0 / 04 August, 2015

The following recruitment emails will be posted on craigslist and sent to mailing lists of different departments in UBC such as Computer Science, Music, and Psychology graduate students and a list of persons who have expressed an interest in being study participants.

From: Salma Kashani or Matthew Chun  
Subject: Call for Study Participants - \$10 for describing **vibrotactile stimuli**

The SPIN research group at the UBC Dept. of Computer Science is looking for participants for a study on designing and describing vibration patterns for a handheld or wristband device. You will receive a compensation of \$10 for your participation in a single 1 hour session.

To participate in the study email [REDACTED] to schedule a time.  
Please contact me if you have any questions.

Salma Kashani  
Master Student, UBC Electrical and Computer Engineering  
[REDACTED]

or

Matthew Chun  
Undergraduate Student, UBC Computer Science

THE UNIVERSITY OF BRITISH COLUMBIA



Department of Computer Science  
201-2366 Main Mall  
Vancouver, B.C., Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

# Designing Affective Vibrotactile Stimuli

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science [REDACTED]

**Co-Investigator:** Hasti Seifi, Graduate Student, Dept. of Computer Science

Oliver Schneider, Ph.D. Student, Dept. of Computer Science

Salma Kashani, MSc., Dept. of Electrical and Computer Engineering

Matthew Chun, BSc., Dept. of Computer Science

Version 1.1 / 04 August, 2015

The SPIN lab at the UBC Department of Computer Science is looking for participants for an experiment on designing and describing vibration patterns on a handheld or wristband device. You will receive a compensation of **10\$** for your participation in a single **1 hour** session.

To participate in the study please contact [REDACTED]

Please contact me if you have any questions.

Describing Affective Vibrations, contact [REDACTED]												
---	---	---	---	---	---	---	---	---	---	---	---	---



## STUDY CONSENT FORM

Department of Computer Science  
2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

**Project Title: Crowdsourcing haptic design and evaluation**  
(UBC Ethics #H13-01646)

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigator:** Hasti Seifi, Ph.D. Student, Dept. of Computer Science, [REDACTED]

Oliver Schneider, Ph.D. Student, Dept. of Computer Science, [REDACTED]

Salma Kashani, MSc., Dept. of Electrical and Computer Engineering

Matthew Chun, BSc. Student, Dept. of Computer Science

The purpose of this study is to understand the context and usage scenarios for everyday applications such as tracking a workout or timing a public talk. Further, the study seeks to investigate characteristics of desirable software notifications in those scenarios. During the experiment, we will provide you with an imaginary everyday application or usage scenario and ask you to indicate the kinds of notifications you would like to receive from a software tool (e.g., cellphone or smartwatch application). We may ask you to structure or describe the notifications in a specific way (e.g., using metaphors, drawing). We may also ask you to attend to a set of visual, auditory, or tactile (e.g., vibrations) notifications and structure, modify, or describe the notifications based on some given criteria.

REIMBURSEMENT: \$2.25 (\$4.5/hour)

TIME COMMITMENT: 30 minutes

CONFIDENTIALITY: *You will not be identified by name in any study reports. Any identifiable data gathered from this experiment will be stored in a secure Computer Science account accessible only to the experimenters.*

If you have ANY QUESTIONS about the instructions or the procedures of this study, feel free to contact [REDACTED] or [REDACTED]. Your participation in this study is entirely voluntary and **you may refuse to participate or withdraw from the study at any time without jeopardy**. Checking the box below indicates that you are more than 19 years old and that you have consent to participate in this study.

If you have any concerns about your treatment or rights as a research participant, you may contact the Research Subject Info Line in the UBC Office of Research Services at 604-822-8598.

#### **A.1.4 HandsOn Forms**

THE UNIVERSITY OF BRITISH COLUMBIA



Department of Computer Science  
201-2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

## Visual Programming Tools for Haptic CyberLearning

(UBC Ethics #H14-01763)

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]  
Version 1.2 / 6 October, 2015

The following message will be used to recruit participants for our study. We will distribute this message using some or all of the following methods:

- Emailing the recruitment message to mailing lists maintained by the Computer Science department or our research group, such as a list of department graduate students (often used for this kind of purpose) and a list of persons who have expressed an interest in being study participants.
- Uploading the recruitment message as an online posting, on craigslist.ca or facebook.
- Physical postings in public areas.
- Email and word-of-mouth when conducting purposeful sampling.

From: Karon MacLean  
Subject: Call for Study Participants - [\$5/\$10/\$15] for "Visual Programming Tools for Haptic Cyberlearning"

The SPIN Research Group in the UBC Dept. of Computer Science is seeking individuals 14 and older for a study investigating the design of visual programming tools that will help high school students learn STEM concepts (Science, Technology, Engineering, Math) such as physical system modeling, through using and programming environments using force feedback tools. Individuals will be compensated at a rate of \$5 per half-hour for their participation. We anticipate this session will be [30/60/90] minutes in duration.

We may ask participants to talk about their experiences with haptic sensations, devices, and related technologies and training.

We may ask participants about their current physics knowledge and enjoyment of the topic. We will then ask participants to interact with one or more haptic devices (for example, a simple actuated knob) and explore an interface that utilizes these devices in various ways. Participants may also be asked to give us feedback on their experience using this tool, and be invited to have their interactions and conversation with the researcher videotaped

Please visit <URL> or contact me to sign up for the study.  
You may also contact me if you have any questions.

Karon MacLean  
Professor, UBC Computer Science  
[REDACTED]

Version 1.0 / July 2, 2014 / Page 1 of 1



THE UNIVERSITY OF BRITISH COLUMBIA

Department of Computer Science  
2366 Main Mall  
Vancouver, BC Canada V6T 1Z4  
Phone: [REDACTED]

## Call For Participants

Haptic Cyberlearning – Visual Programming Environment Usability Evaluation

Professor Karon MacLean, Ph.D  
Department of Computer Science  
University of British Columbia

[REDACTED]@cs.ubc.ca

Student investigators: Gordon Minaker, Oliver Schneider  
Department of Computer Science, University of British Columbia  
[REDACTED]@cs.ubc.ca

### WHO ARE WE AND WHAT DO WE DO?

The SPIN Research Group in the UBC Dept. of Computer Science is seeking individuals 14 and older for a study investigating the design of visual programming tools that will help high school students learn STEM (Science, Technology, Engineering, Math) concepts, using force feedback tools. Individuals will be compensated at a rate of \$5 per half-hour for your participation. We anticipate this session will be [30/60/90] minutes in duration.

### OUR EXPERIMENT AND YOUR PARTICIPATION

We may ask participants to talk about their experiences with haptic sensations, devices, and related technologies and training. We may ask participants about their current physics knowledge and enjoyment of the topic. We will then ask participants to interact with one or more haptic devices (for example, a simple actuated knob) and explore an interface that utilizes these devices in various ways. Participants may also be asked to give us feedback on their experience using this tool, and be invited to have their interactions and conversation with the researcher videotaped.

### WHOM TO CONTACT

If you are interested in this study or you desire any further information, please call Gordon Minaker at [REDACTED] or email him at [REDACTED]. You can also contact the principal investigator (MacLean) at the telephone or email addresses listed above, or in person.



## STUDY CONSENT FORM

Department of Computer Science  
2366 Main Mall, Vancouver, BC, Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

**Project Title:** Haptic Cyberlearning – Visual Programming Environment Usability Evaluation  
(UBC Ethics #H14-01763)

**Principal Investigator:**

Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

**Co-Investigators:**

Oliver Schneider, Ph.D Candidate, Dept. of Computer Science, [REDACTED]

Gordon Minaker, Undergraduate Student, Dept. of Computer Science, [REDACTED]

The purpose of this study is to investigate the design of visual programming tools that will help high school students learn STEM concepts (Science, Technology, Engineering, Math) such as physical system modeling, through using and programming environments using force feedback tools. We may ask you or your child about current knowledge of physics. We will then ask you to interact with one or more haptic devices (for example, a simple actuated knob) and explore an interface that utilizes these devices in various ways. We may also ask you to give us feedback on your experience using this tool, and invite you to be videotaped in your interactions and conversation with the researcher.

You may refuse or skip any tool, task, or question without affecting your reimbursement.

**REIMBURSEMENT:** We are very grateful for your participation. You will receive monetary compensation of \$5 per half hour for this session.

**TIME COMMITMENT:** 1 × [30/60/90 minute] session

**RISKS & BENEFITS:** This experiment contains no more risk than everyday computer use. There are no direct benefits to participants beyond compensation.

**CONFIDENTIALITY:** *You will not be identified by name in any study reports. Any identifiable data gathered from this experiment will be stored in a secure Computer Science account accessible only to the experimenters.*

**AUDIO/VIDEO RELEASE:** *You may be asked for audio or video to be recorded during this session. You are free to say no without affecting your reimbursement.*

I agree to have AUDIO recorded:  Yes  No

I agree to have VIDEO recorded:  Yes  No

I agree to have ANONYMOUS VIDEO OR AUDIO EXCERPTS presented with the findings:  Yes  No

You understand that the experimenters will ANSWER ANY QUESTIONS you have about the instructions or the procedures of this study. After participating, the experimenters will answer any other questions you have about this study. Your participation in this study is entirely voluntary and **you may refuse to participate or withdraw from the study at any time without jeopardy**. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in this study.

If you have any concerns or complaints about your rights as a research participant and/or your experiences while participating in this study, contact the Research Participant Complaint Line in the UBC Office of Research Ethics at 604-822-8598, or if long distance email RSIL@ors.ubc.ca or call toll free 1-877-822-8598".

---

You hereby CONSENT to participate and acknowledge RECEIPT of a copy of the consent form:

---

Participant Signature

---

Date

---

Printed Name of the Participant signing above

---

PARENT / GUARDIAN CONSENT (*if necessary*)

- I consent / I do not consent (circle one) to my child's participation in the study

---

Parent or Guardian Signature

---

Date

---

Printed Name of Parent or Guardian signing above



## STUDY CONSENT FORM

Department of Computer Science  
2366 Main Mall, Vancouver, BC, Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

**Project Title:** Investigation of Tools and Techniques for Haptic Design Processes  
(UBC Ethics # H14-01763)

**Principal Investigator:** Karon MacLean, Professor, Dept. of Computer Science, [REDACTED]

As a part of our study process, we may want to contact you with our results for a brief conversation or email exchange some time after the study session. We want to make sure that our results accurately reflect your experience. This exchange is entirely optional and you are free to opt out at any time. If you consent to having us contact you after the study, please provide your contact information below. Your experimenter will be happy to answer any questions.

**Note: This information will be kept in a secure, encrypted file, which will be deleted when our study is completed. No physical copy will be kept.**

First name: \_\_\_\_\_

Email address: \_\_\_\_\_

Phone number (if no email address): \_\_\_\_\_

### **A.1.5 Haptician Interview Form**



## PARTICIPANT'S COPY CONSENT FORM

Department of Computer Science  
2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

**Project Title:** Low-Attention and Affective Communication Using Haptic Interfaces  
(Haptic Design Cycle Interview)  
(UBC Ethics # B01-0470)

**Principal Investigators:** Prof. Karon MacLean, Department of Computer Science,  
University of British Columbia [REDACTED]  
Prof. Kellogg Booth, Department of Computer Science,  
University of British Columbia [REDACTED]  
Adjunct Prof. Colin Swindells, Department of Computer Science,  
University of Victoria, [REDACTED]

The purpose of this participatory interview is to listen to your experiences and opinions related to the design of physical controls such knobs, sliders, and buttons. You will be asked a series of open-ended questions. There is no right or wrong answer to any of the questions.

During the participatory interview, you will be asked to share your thoughts with the experimenter about the design of physical controls. Discussions will centre on the specific contexts (e.g. sources of challenge, urgency, constraints, etc.) that you experience in your daily work environment, relating to physical control design. The interview may be conducted in person or remotely (phone, Skype) as mutually agreed upon.

The experimenter will write field notes during the interview. Video and/or audio will be recorded only if you provide permission by checking the Audio/Video Consent Box below. We will contact you for further permission before making use of recordings of your participation in presentation of our results.

**TIME COMMITMENT:** One interview, approximately 30 minutes

**CONFIDENTIALITY:** *You will not be identified by name in study reports. Data gathered in the sessions will be stored in a secure UBC Computer Science account accessible only to the experimenters. Names of individuals and companies mentioned in these sessions will be kept confidential.*

You understand that the experimenters will ANSWER ANY QUESTIONS you have about the instructions or the procedures of these sessions. After participating, the experimenter will answer any questions you have about the sessions.

Your participation in these sessions is entirely voluntary and you may refuse to participate or withdraw at any time without jeopardy. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in these sessions.

If you have any concerns about your treatment or rights as a research subject, you may contact the Research Subject Info Line in the UBC Office of Research Services at 604-822-8598.

---

You hereby CONSENT to participate in this study and acknowledge RECEIPT of the consent form:

NAME \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

AUDIO/VIDEO CONSENT BOX

By marking this box, I consent to being recorded with video and/or audio during the session



## RESEARCHER'S COPY CONSENT FORM

Department of Computer Science  
2366 Main Mall  
Vancouver, B.C. Canada V6T 1Z4  
tel: [REDACTED]  
fax: [REDACTED]

**Project Title:** Low-Attention and Affective Communication Using Haptic Interfaces  
(Haptic Design Cycle Interview)  
(UBC Ethics # B01-0470)

**Principal Investigators:**

Prof. Karon MacLean, Department of Computer Science,  
University of British Columbia [REDACTED]  
Prof. Kellogg Booth, Department of Computer Science,  
University of British Columbia [REDACTED]  
Adjunct Prof. Colin Swindells, Department of Computer Science,  
University of Victoria [REDACTED]

The purpose of this participatory interview is to listen to your experiences and opinions related to the design of physical controls such knobs, sliders, and buttons. You will be asked a series of open-ended questions. There is no right or wrong answer to any of the questions.

During the participatory interview, you will be asked to share your thoughts with the experimenter about the design of physical controls. Discussions will centre on the specific contexts (e.g. sources of challenge, urgency, constraints, etc.) that you experience in your daily work environment, relating to physical control design. The interview may be conducted in person or remotely (phone, Skype) as mutually agreed upon.

The experimenter will write field notes during the interview. Video and/or audio will be recorded only if you provide permission by checking the Audio/Video Consent Box below. We will contact you for further permission before making use of recordings of your participation in presentation of our results.

**TIME COMMITMENT:** One interview, approximately 30 minutes

**CONFIDENTIALITY:** *You will not be identified by name in study reports. Data gathered in the sessions will be stored in a secure UBC Computer Science account accessible only to the experimenters. Names of individuals and companies mentioned in these sessions will be kept confidential.*

You understand that the experimenters will ANSWER ANY QUESTIONS you have about the instructions or the procedures of these sessions. After participating, the experimenter will answer any questions you have about the sessions.

Your participation in these sessions is entirely voluntary and you may refuse to participate or withdraw at any time without jeopardy. Your signature below indicates that you have received a copy of this consent form for your own records, and consent to participate in these sessions.

If you have any concerns about your treatment or rights as a research subject, you may contact the Research Subject Info Line in the UBC Office of Research Services at 604-822-8598.

---

You hereby CONSENT to participate in this study and acknowledge RECEIPT of the consent form:


NAME \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_


AUDIO/VIDEO CONSENT BOX

By marking this box, I consent to being recorded with video and/or audio during the session

## **A.2 Examples of Qualitative Analysis Methods**

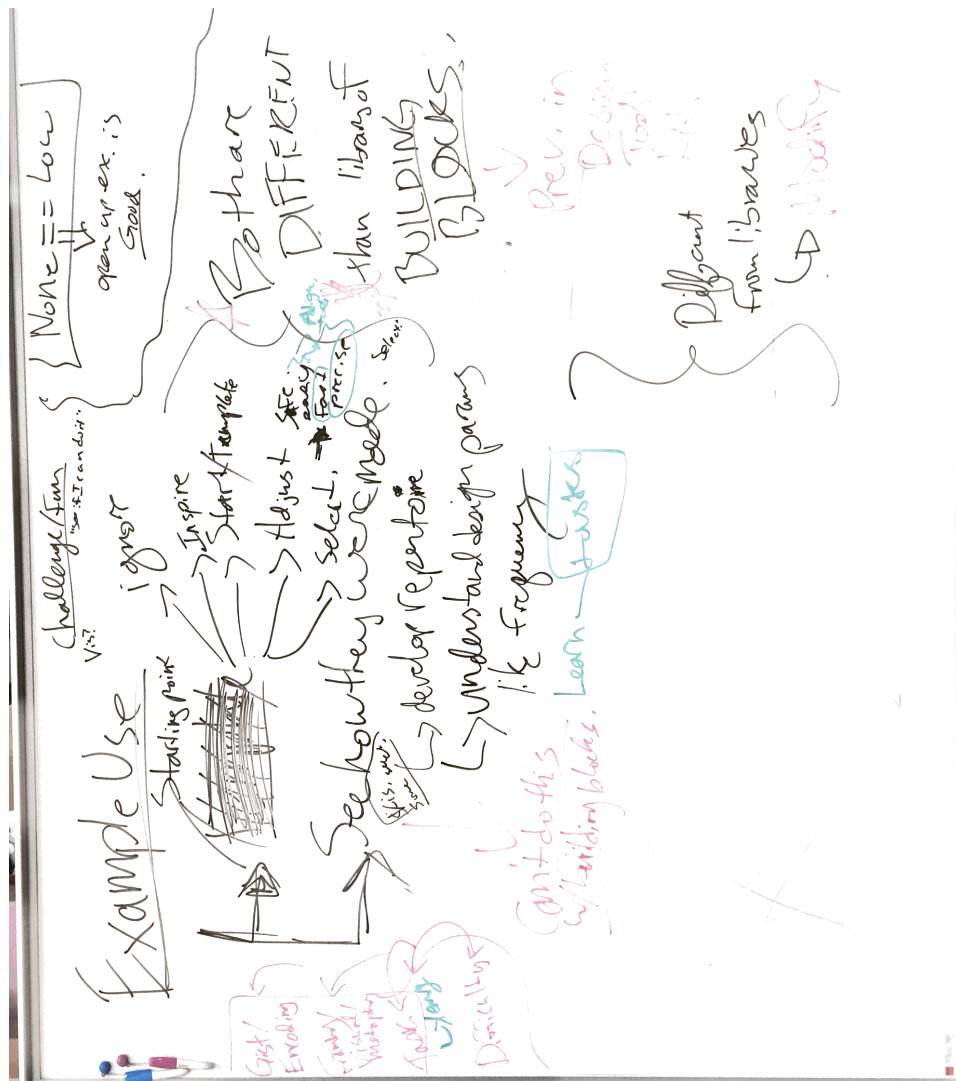

**Figure A.1:** Picture of whiteboard when developing themes during Macaron analysis (Chapter 5).

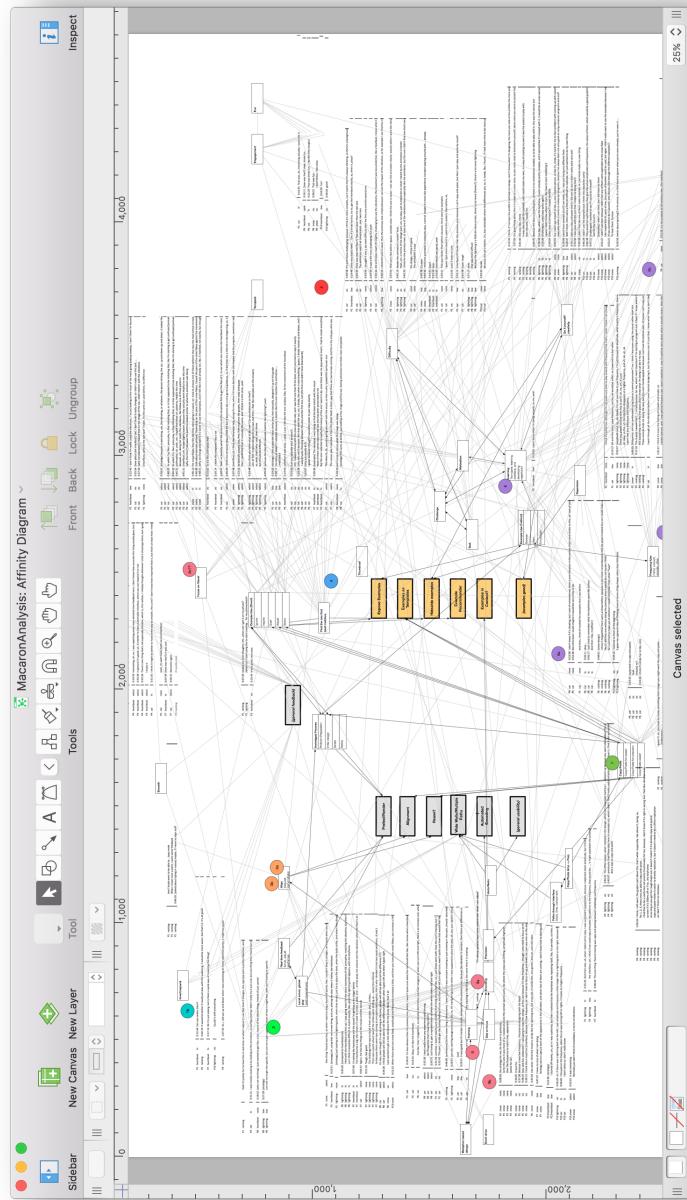

**Figure A.2:** Affinity diagram showing clustering of participant statements into themes during Macaron (Chapter 5) analysis.

MacaronCodes.xlsx												
	PID	Task	Interface	Start	Handoff	E	Press Start	F	G	H	I	
1	2	3	4	5	6	7	8	9	10	11	12	
1	PID	Task	Interface	Start	Handoff	E	Press Start	F	G	H	I	
2	P1	heartbeat	none	08:48	09:20	Press Start	Press End	Initial Design	Choose example iteration	Refinement	Framing	
3	P1	cat	low	13:45	14:22	12:08 Play then scrub	12:08 Animation then all examples	First best	Adjust first beat	Time second beats	Encoding	
4	P1	lightning	low	14:51	15:38	16:19 Animation then all examples	Copy/Paste	Ex4!	Constant frequency	Copy, frequency	Motivation	
5	P1	car	select	26:13	26:30	27:15	30:55 Play then scrub	Ex4	Adjust overall freq.	Background, Separate	Example size	
6	P1	snow	select	33:23	34:09	34:49 Play, no examples	Copy/Paste	Ex6	Adjust overall freq.	Ignore	Template	
7	P1	heartbeat	low	11:49	13:31	14:51	19:45 Play, no examples	none	see quote	See's Tries! Tried at beginning by c small variation	Report/size	
8	P2	cat	low	23:19	24:05	24:34*	25:18 Play, no examples	none	height/size in lighting, ignore	height/size in lighting, ignore	(see quote)	
9	P2	lightning	none	20:04	20:51	20:55 Play, then scrub	20:55 30:55 Play, then scrub	none	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
10	P2	car	low	10:08	11:43	11:49	14:43 Play, then scrub	Ex6	none	height/size in lighting, ignore	height/size in lighting, ignore	(see quote)
11	P2	snow	hi	09:10	10:20	11:22	18:32 Play, then scrub	Ex6	none	height/size in lighting, ignore	height/size in lighting, ignore	Report/size
12	P3	cat	select	20:56	21:30	22:24	28:47 Some examples	Inspired	on second beat, then corporate back	Followed w/ freq. c/P first half to second half w/ height (small and large) Part	Report/size	
13	P3	lightning	low	31:17	31:54	32:16	46:29 Some examples	Ex4	none	pause at do height, higher at double	Report/size	
14	P3	car	low	41:00	41:20	41:40	41:40 Play then scrub	Ex4	none	height/size in lighting, ignore	Report/size	
15	P3	snow	none	00:05	00:44	01:08	01:08 Play then scrub	Ex4	none	height/size in lighting, ignore	Report/size	
16	P4	heartbeat	select	08:58	11:04	11:21	18:48 Some examples	Copy/Paste	Ex6	height/size in lighting, ignore	Report/size	
17	P4	cat	select	21:36	22:02	22:04*	30:57 Animation then all examples	Inspired	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
18	P4	lightning	hi	33:36	34:00	34:34	42:07 Animation then all examples	Ex6	smoothed a component	height/size in lighting, ignore	Report/size	
19	P4	car	none	43:10	44:10	44:27	50:23 Animation once	Inspired	smoothed a component	height/size in lighting, ignore	Report/size	
20	P4	snow	hi	54:24	54:48	54:53	54:53 Animation once	Ex6	smoothed a component	height/size in lighting, ignore	Report/size	
21	P4	heartbeat	hi	54:53	55:19	55:27	55:27 (for example, cr)	Inspired	smoothed a component	height/size in lighting, ignore	Report/size	
22	P5	cat	none	16:23	16:37	17:21	20:47 Animation	Ex6	smoothed a component	height/size in lighting, ignore	Report/size	
23	P5	lightning	select	22:35	23:09	23:47	28:49 One example, SELECT	Copy/Paste	Ex6 (random)	height/size in lighting, ignore	Report/size	
24	P5	car	low	23:40	24:40	25:02	28:39 Play then example, EX4A	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
25	P5	snow	none	31:06	31:16	31:40	31:40 Play then example, EX4A	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
26	P5	heartbeat	select	11:05	11:26	12:14	13:25 Play then example, EX4A	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
27	P6	cat	select	16:03	16:38	17:55	21:44 All examples didn't play ex2, Recreate	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
28	P6	lightning	hi	25:09	25:38	27:04	27:22 All examples didn't play ex2, Recreate	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
29	P6	car	low	31:21	31:42	32:55	36:10 All examples	Inspired	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
30	P6	snow	none	38:47	39:06	39:30	42:31 All examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
31	P6	heartbeat	hi	41:25	41:35	41:42	45:12 Animation, then 06	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
32	P7	cat	select	02:25	02:41	03:25	06:21 Animation, then 06	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
33	P7	lightning	low	06:27	09:11	09:44	21:09 Play then scrub	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
34	P7	car	hi	22:49	23:37	23:55	37:54 Play then some examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
35	P7	snow	low	36:27	40:26	40:37	47:33 Play then scrub	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
36	P7	heartbeat	hi	36:47	38:27	39:39	48:15 Play then scrub	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
37	P8	cat	select	19:31	19:51	20:36	20:36 Play then scrub	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
38	P8	lightning	low	23:41	23:41	24:24	27:16 All examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
39	P8	car	select	30:25	30:53	30:48	32:26 One example	Frequency Test, none	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
40	P8	snow	hi	35:02	35:02	35:51	38:47*	Inspired	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
41	P8	heartbeat	low	35:25	35:25	35:31	38:15 Play then some (~5) examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
42	P9	cat	select	02:25	02:41	03:25	06:21 All examples, except 06	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
43	P9	lightning	hi	06:27	09:11	09:44	41:05 All examples, except 06	none	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
44	P9	car	hi	40:21	40:41	41:05	45:56 All examples, except 06	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
45	P9	snow	select	48:28	49:01	49:30	50:00 All examples, parts of each	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
46	P9	heartbeat	hi	14:53	16:50	17:55	24:56 Play then all examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
47	P10	cat	low	16:54	17:55	17:55	24:57 Play then all examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
48	P10	lightning	hi	18:41	19:41	19:49	25:11 Play then all examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
49	P10	car	select	40:24	40:44	40:54	42:14 All examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
50	P10	snow	hi	57:04	57:22	57:27	58:17 All examples	Ex6	height/size in lighting, ignore	height/size in lighting, ignore	Report/size	
51	P10	heartbeat	none	05:52	06:28	09:14	14:29 All examples (~3 or more)	Copy/Paste	Ex6	height/size in lighting, ignore	Report/size	
52												

**Figure A.3:** Screenshot of video coding sheet used to develop and count codes and calculate task timing during Macaron analysis (Chapter 5).

MacaronCodes.xlsx

The screenshot shows a Microsoft Excel spreadsheet titled "MacaronCodes.xlsx". The data is organized into several columns:

- E102:** Column A contains participant IDs.
- A:** Column B contains code tags (e.g., P7, cat, lightning).
- B:** Column C contains the transcribed comments.
- C:** Column D contains code tags (e.g., P7, cat, lightning).
- D:** Column E contains the transcribed comments.
- Other Columns:** The spreadsheet includes columns for "Frequency", "Learning", "Match Example", "THUMBNAIL GOOD Match Example", "Challenge", "Positive feedback", "Challenge", "Challenge", "Learning", "Learning", "Repertoire", "Challenge", "Encoding", "Challenge", "Frequency", "Breakdown", "Learning", "Encoding", "Repertoire", "vis", "reliance on examples", "C-P", "choose", "Challenge", "Example Use", "Task depend", "Focus on Vis", "Gist", "Engaged", "Positive feedback", "Matching Example", "Challenge", and "CountStats-AfterHandoff".

Some representative comments from the spreadsheet:

- Row 239: P7 cat select I think, if we seen the profile it will help me design, but if i know what i'm designing, the more you look at the profiles the more you lose your own
- Row 240: P7 cat select 0:06:37 Again, the two key things are the visuals and the sounds I'm not too sure how the sound is getting influenced with the frequency over here, I think there is some connection
- Row 241: P7 cat select This little Eh, Eh sound is going very well with the visual, so that is why I picked this particular one
- Row 242: P7 cat select The reason why I selected it from this panel itself, is that I saw that there are two bumps coming, and this is the only guy who was
- Row 243: P7 lightning none 0:09:15 Oh gosh [first play through of lightning]
- Row 244: P7 lightning none 0:21:16 Tough, but good
- Row 245: P7 lightning none The challenge here was to build it from scratch, and ... strikes...
- Row 246: P7 lightning none There was a point where two of the strikes were coming up ... same time interval
- Row 247: P7 lightning none So because there were two coming at one particular snapshot, that is why I divided it into two equal partitions, 6 and 1
- Row 248: P7 lightning none 0:22:18 becoming more and more easy to me
- Row 249: P7 lightning none 0:22:35 [How was it building it from scratch?]
- Row 250: P7 lightning none It was good, but I'm getting more used to it so
- Row 251: P7 lightning none 0:37:58 Super rough
- Row 252: P7 lightning none So there are two motions going on, firstly, the steering is vibrating at the same time it is rotating
- Row 253: P7 lightning none 0:47:37 I have no clue at what I am doing
- Row 254: P7 lightning low Strategy was to capture each of the appearance and the frequency, and when two of them are coming, I don't know how to distinguish
- Row 255: P7 lightning low 0:48:28 Examples, um, since I'm not seeing the amplitude and frequency, I'm not sure how to use them
- Row 256: P7 lightning low and knew there were three choices I had to make, ... how can I take help from these examples
- Row 257: P7 car low 0:48:48 I needed the amplitude and frequency of those, otherwise, yeah
- Row 258: P7 snow low not to go with any of them, and to found my own [interpretation?]
- Row 259: P7 snow low 0:50:45 Yeah, so the thing is, he, I have the full control
- Row 260: P7 snow low Second here, I was allowed copy and paste, so that means I have the flexibility to choose from what I need from those examples
- Row 261: P7 snow low ... everything else gone.
- Row 262: P7 snow low But given the task was simpler, maybe I could have (?) with these two as well
- Row 263: P7 ranking none 0:18:11 [How was that?] Okay, kinda fun
- Row 264: P7 ranking none 0:18:19 just trying to mirror what the image was doing
- Row 265: P7 ranking none 0:18:52 [why not red thing] I just wanted to get like, a full, record of the whole thing, instead of just, partial
- Row 266: P7 ranking none 0:22:29 That was kinda fun... like the kitty [laughs]
- Row 267: P7 ranking none [incomp.]
- Row 268: P7 ranking none [strategy] The same as before, just looking at the image and find out, feeling whichever one feels most compatible
- Row 269: P8 heartbeat none 0:27:17 okay
- Row 270: P8 heartbeat none that was more difficult
- Row 271: P8 heartbeat none because the lighting is a little bit more erratic, there's a lot more lighting
- Row 272: P8 heartbeat none ^----^ no interaction
- Row 273: P8 cat hi
- Row 274: P8 cat hi
- Row 275: P8 lightning low
- Row 276: P8 lightning low
- Row 277: P8 lightning low

**Figure A.4:** Screenshot of transcribed participant comments with code tags from Macaron analysis (Chapter 5).



**Figure A.5:** Image of all participant timelines developed for Macaron analysis (Chapter 5).