

+44 (0) 161 928 6221 info@hydratron.co.uk

## **TECHNICAL DATA SHEET**

PRODUCT HYPS-AZ-2-36H-N\*/\*\*options

SERIES HYPS-AZ-2 Single Acting

Air operated, hydraulic power pack for pressure testing, chemical injection and hydraulic power.



#### **FEATURES**

- Infinitely variable output pressure and flow
- Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- · Designed for ease of maintenance
- Low cost servicing

Basic Models are ATEX Certified in accordance with 2014/34/EU. *Note: addition of options may affect ATEX rating.* 

### **PERFORMANCE DATA**

Max Rated Output Pressure	3,600psi (248bar)
Output Per Cycle	2.49 in³ (40.8cc)
Max Flow	622 in³/min (10.2 litre/min)
Max Air Supply Pressure	100psi (7bar)
Ratio	36 : 1
Air Consumption	56 scfm (1,586 NI/min)
Tank Capacity	2.5 Gallons (11.4 litres)

### **SEAL OPTIONS (N\*)**

N*	(Standard) Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals







CO	мет	ъΠ	CTI		П
CO	ΝЭΙ	KU	CII	UI	VI

Frame and Tank	Stainless Steel
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N)
Hydraulic Cylinder	Stainless Steel
Piston	Stainless Steel + Chrome Finish
Outlet Port	Stainless Steel

### CONNECTIONS


Hydraulic Outlet	1/2" NPT(F)
Air Inlet	1/2" BSPP(F)
Net Weight	30kg (66lb)

# **COMMON OPTIONS (BUT NOT LIMITED TO)**

/ D	External fluid supply via bulkhead (no tank fitted)
/T	Stainless steel tank fitted
/ Tx	Stainless steel tank fitted with external fluid supply port
/ F	Panel mount digital stroke counter (non ATEX)
/ G	Panel mount pneumatic stroke counter
/1	Test isolation valve fitted
/0	Single pen chart recorder complete with recorder isolation valve
/ W	Fitted with wheels
/ R	Relief valve fitted and set in test line



#### **GENERAL LAYOUT DRAWING**

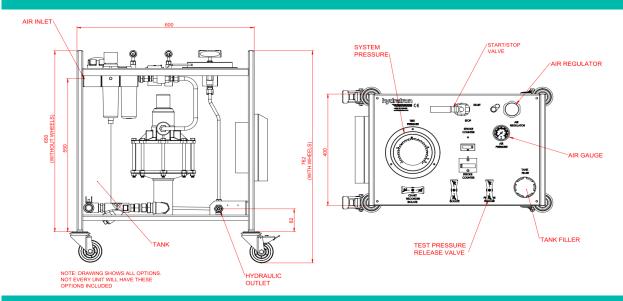

### **HYDRAULIC PRESSURE STATIC / STALL CONDITIONS**

AIR PRESSURE	HYDRAULIC PRESSURE
20psi (1.4bar)	625psi (43bar)
40psi (2.8bar)	1,400psi (96.5bar)
60psi (4bar)	2,150psi (148bar)
80psi (5.5bar)	2,850psi (197bar)
100psi (7bar)	3,600psi (248bar)

## FLOW CURVE AZ-2-36 - Ratio 36:1

