


## ESERCIZIO S2/L1

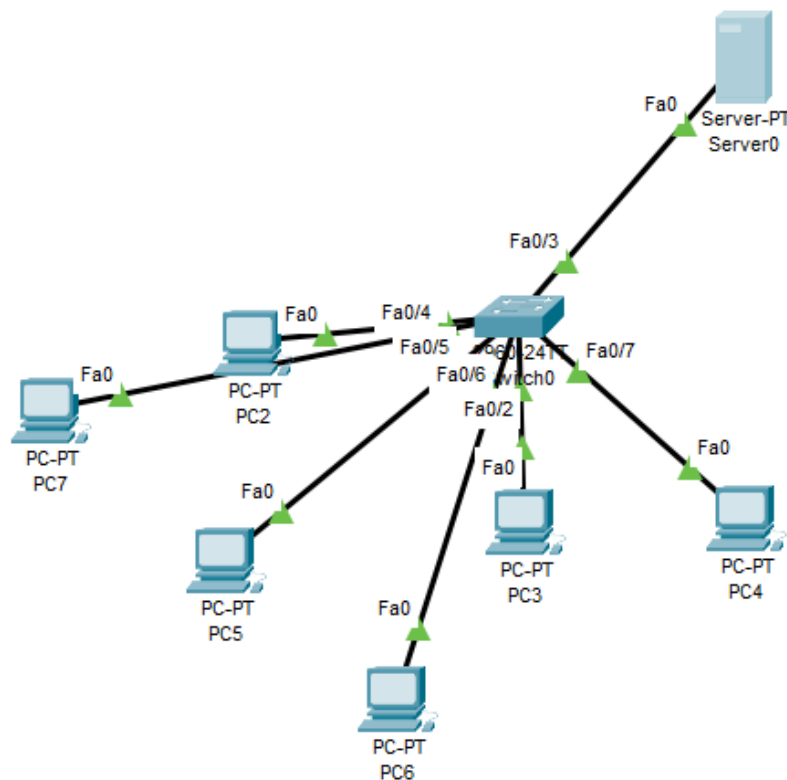

ho creato un progetto con 1 server collegato a uno switch, dove ho connesso vari client.

Server0

Physical Config **Services** Desktop Programming Attributes

**SERVICES**

- HTTP
- DHCP**
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP

**DHCP**

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: serverPool

Default Gateway: 169.254.0.1

DNS Server: 0.0.0.0

Start IP Address: 169 254 0 0

Subnet Mask: 255 255 0 0

Maximum Number of Users: 6


TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0


Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	169.254....	0.0.0.0	169.254....	255.255....	6	0.0.0.0	0.0.0.0

Ho abilitato l'opzione DHCP dal server e l'ho configurata in base a quanti client avrei connesso.

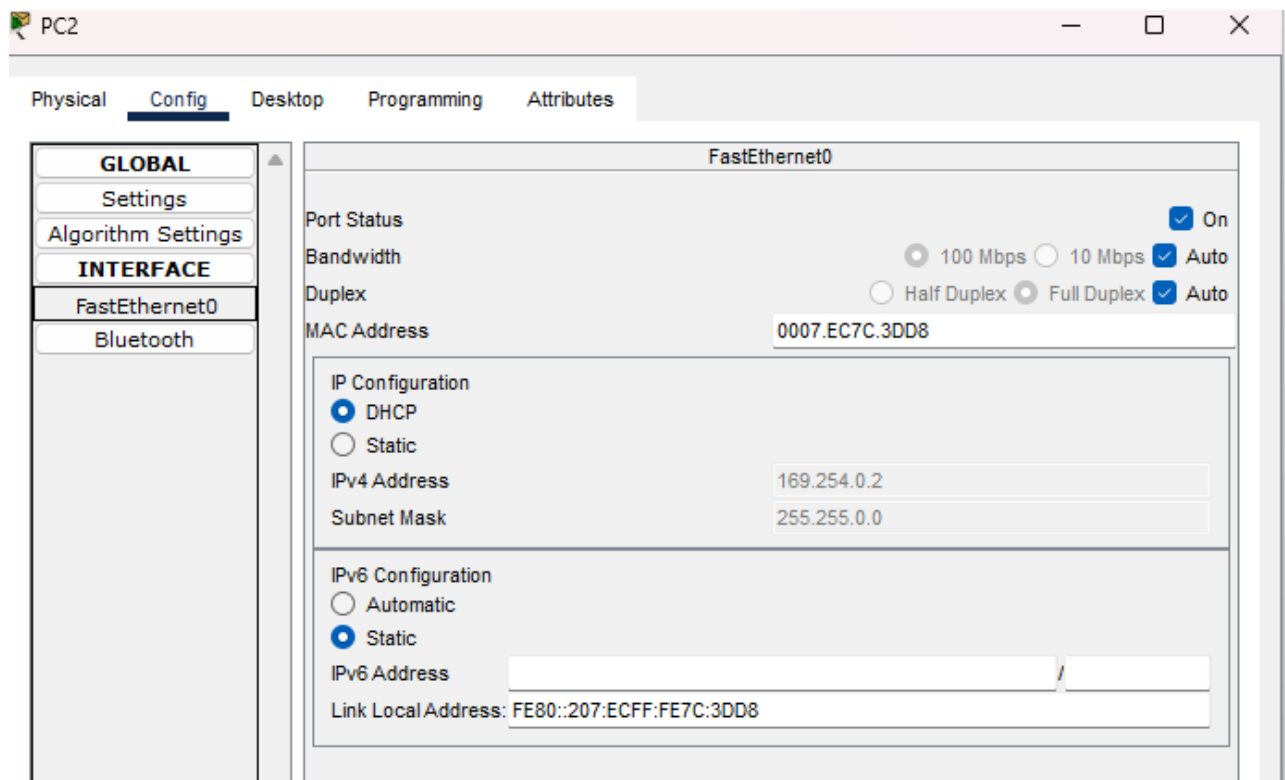

Infine ho impostato DHCP come opzione IP nei vari pc.

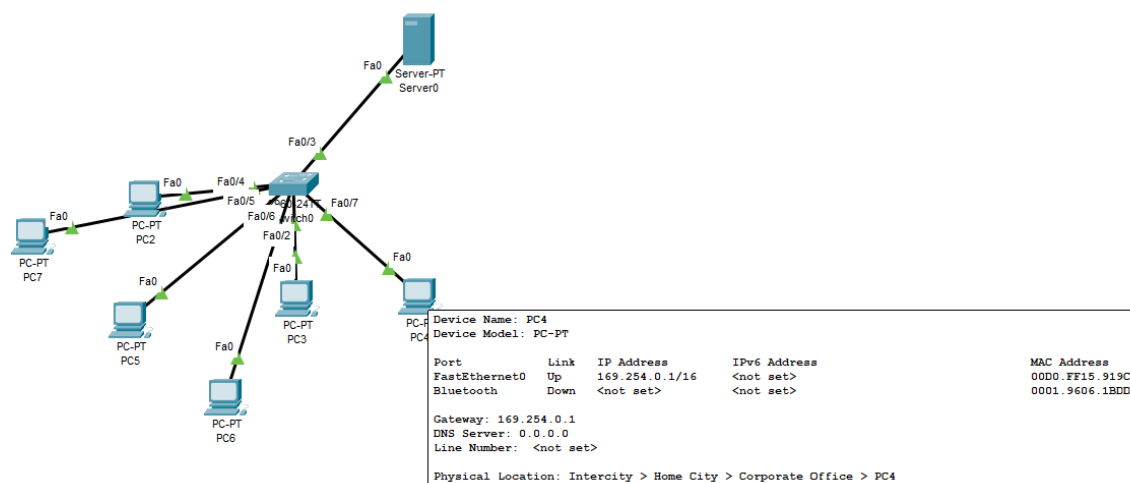

Gli host vanno .1 a .6