
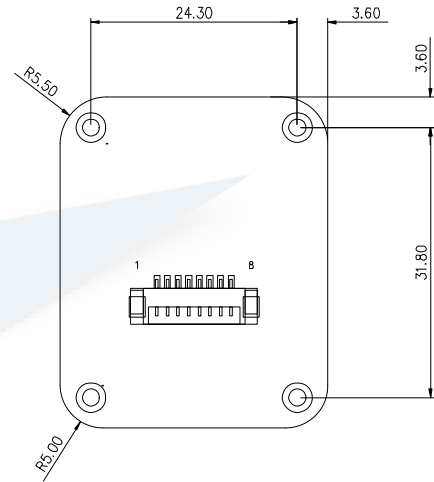
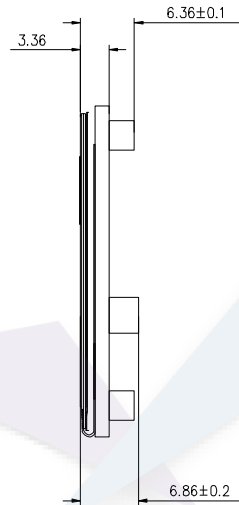


Item	Date	Remark
A	2024625	Original Drawing

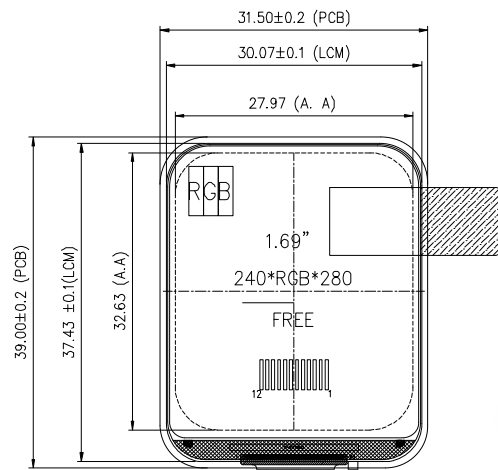


PIN	DESCRIPTION
1	VCC (3V/5V)
2	GND
3	DIN
4	CLK
5	CS
6	DC
7	RST
8	BL

NOTES:

1. DISPLAY TYPE: 1.69"IPS TFT/TRANSMISSIVE/NORMALLY BLACK
2. VIEWING DIRECTION: All
3. DRIVER IC: ST7789V3
4. OPERATING TEMP.: -20°C~70°C
5. STORAGE TEMP.: -30°C~80°C
6. BACKLIGHT: 3 CHIP-WHITE LED
7. LCM Luminance: 500 CD/M2(TYP)
8. UNMARKED TOLERANCE: ±0.2
9. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm
10. 产品符合ROHS标准

osptek®



Customer Approval Signature	Shenzhen Osprey Optoelectroics Technology Co.,Ltd.						Drawing Number	Rev.		
							1.69" TFT	B		
	Unless Otherwise Specified		Title	YDP169HB001-P8				Material		
	Unit	mm						Soda Lime / Polyimide		
	General Roughness									
	Tolerance			Drawn	E.E.	Panel / E.	P.M.	Scale	Sheet	Size
	Dimension	±0.2	By	Letter						
	Angle	±1	Date	20240625						