


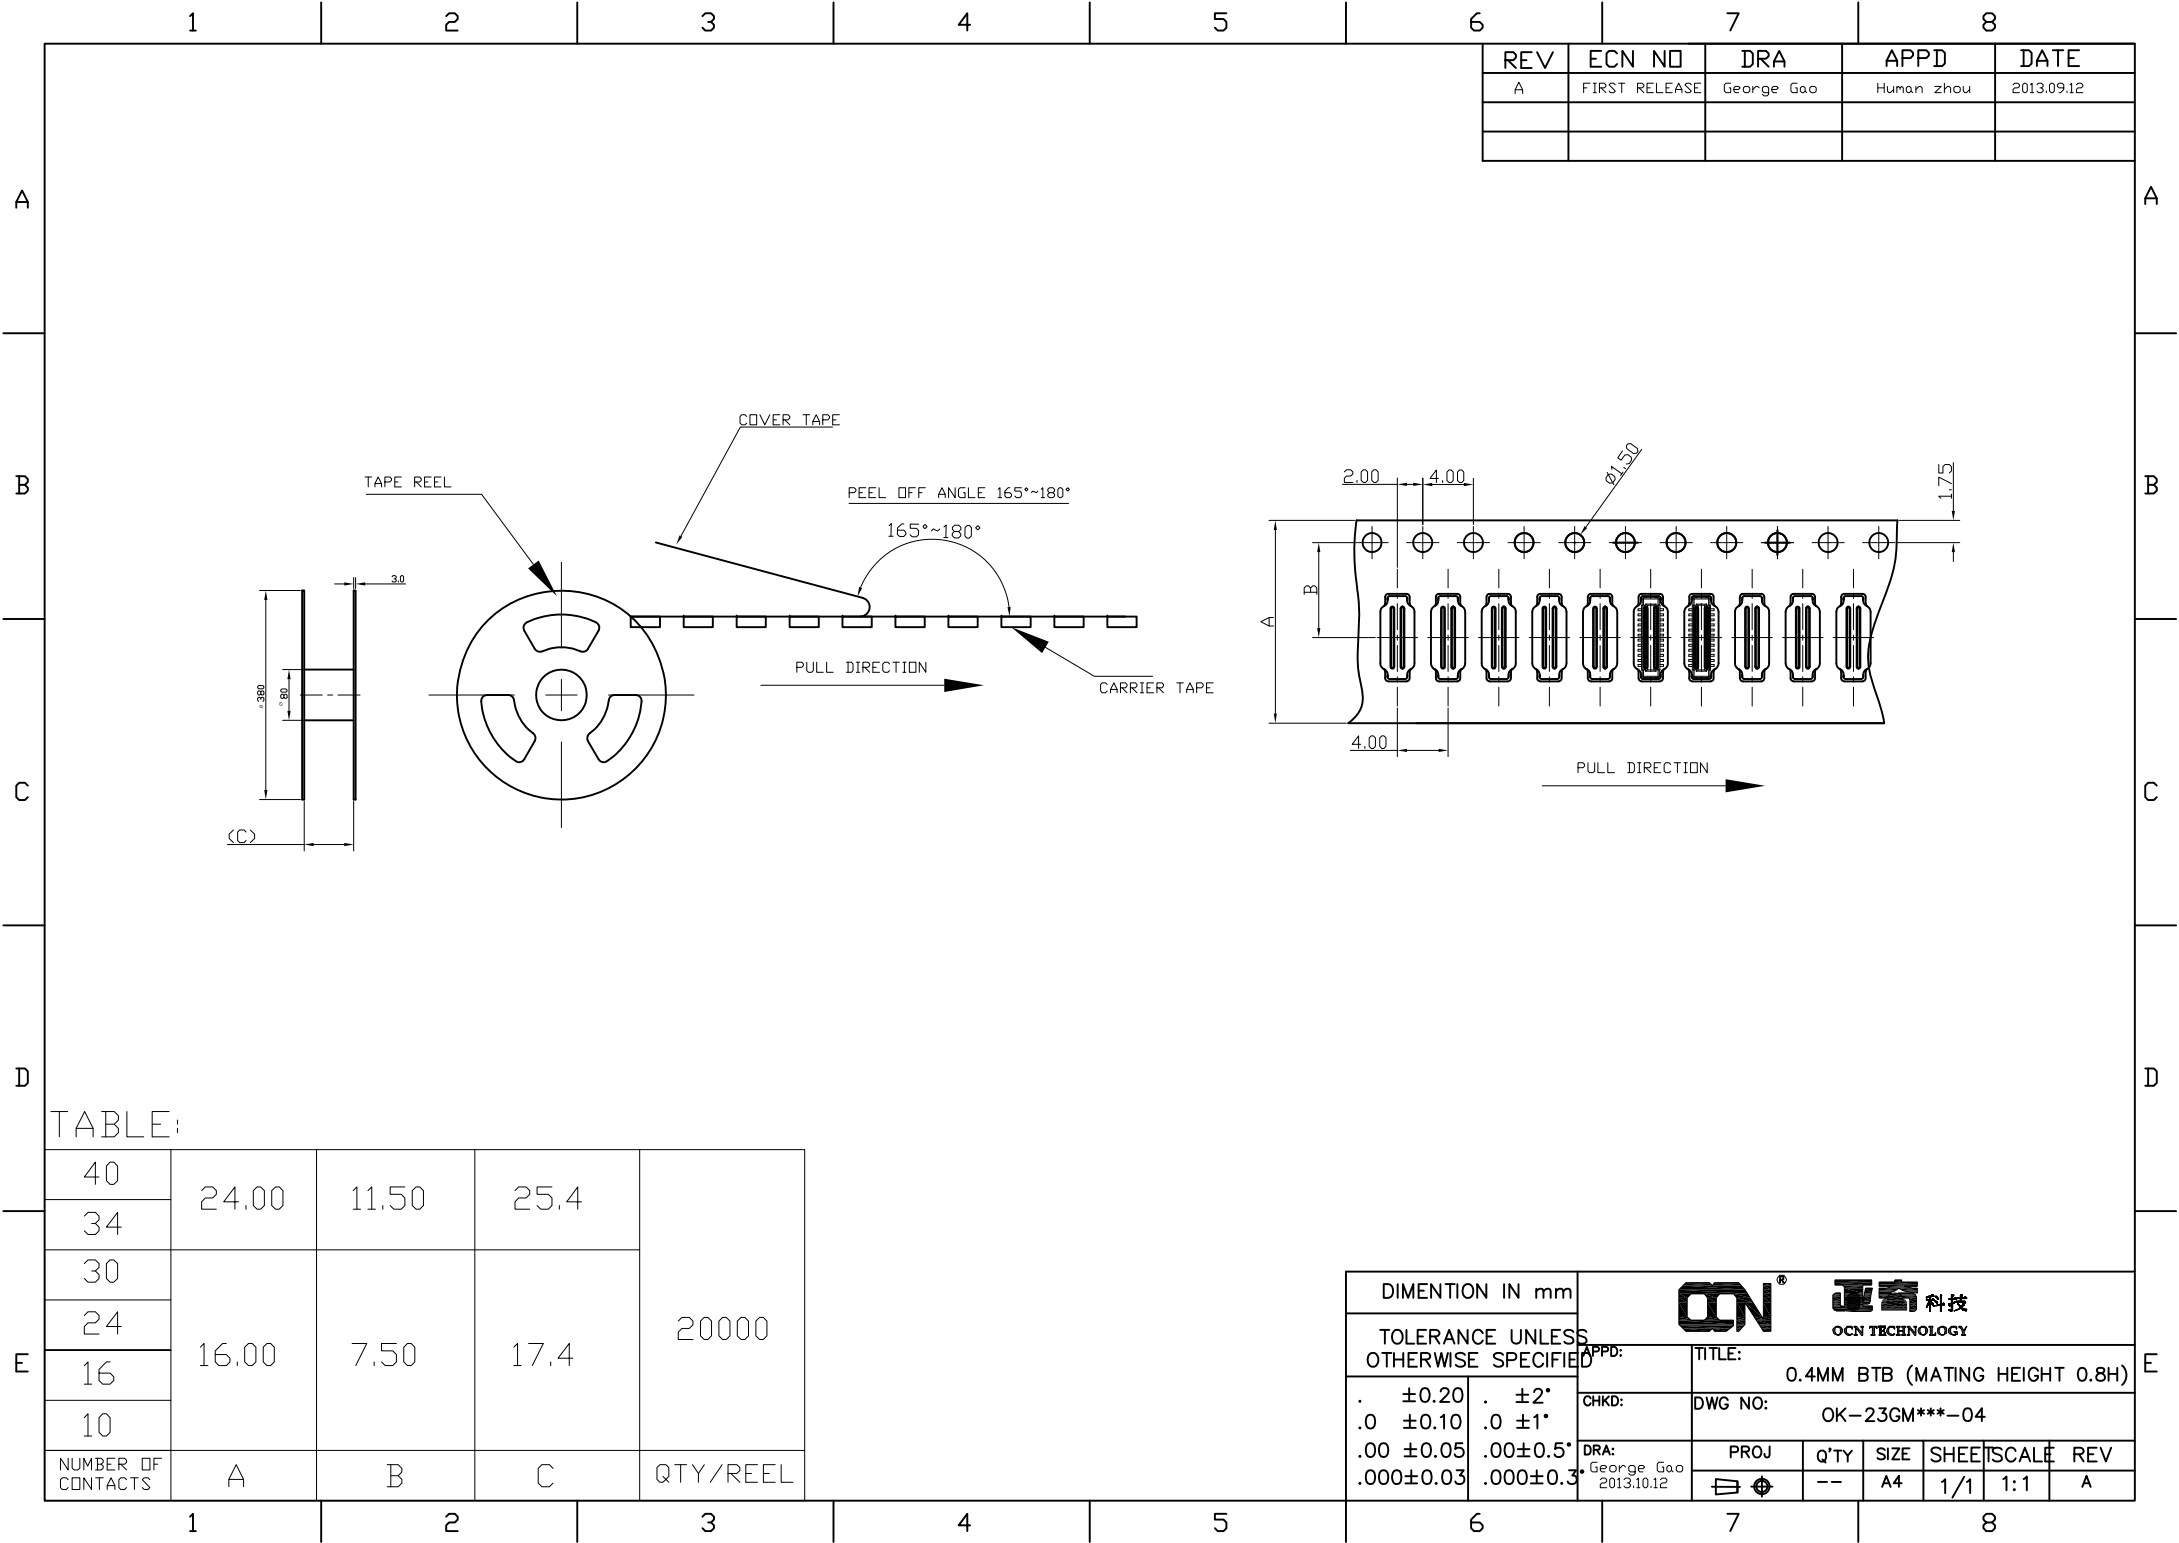


REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human zhou	2013.09.12

TABLE:

40	24.00	11.50	25.4	20000
34				
30	16.00	7.50	17.4	
24				
16				
10				
NUMBER OF CONTACTS	A	B	C	QTY/REEL

DIMENTION IN mm		OCN ® 正奇科技 OCN TECHNOLOGY				
TOLERANCE UNLESS OTHERWISE SPECIFIED		APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)			
. ±0.20	. ±2°	CHKD:	DWG NO: OK-23GM***-04			
.0 ±0.10	.0 ±1°	DRA: George Gao 2013.10.12	PROJ	Q'TY	SIZE	SHEETSCALE REV
.00 ±0.05	.00±0.5°		☐ ⊕	--	A4	1/1 1:1 A
.000±0.03	.000±0.3°					

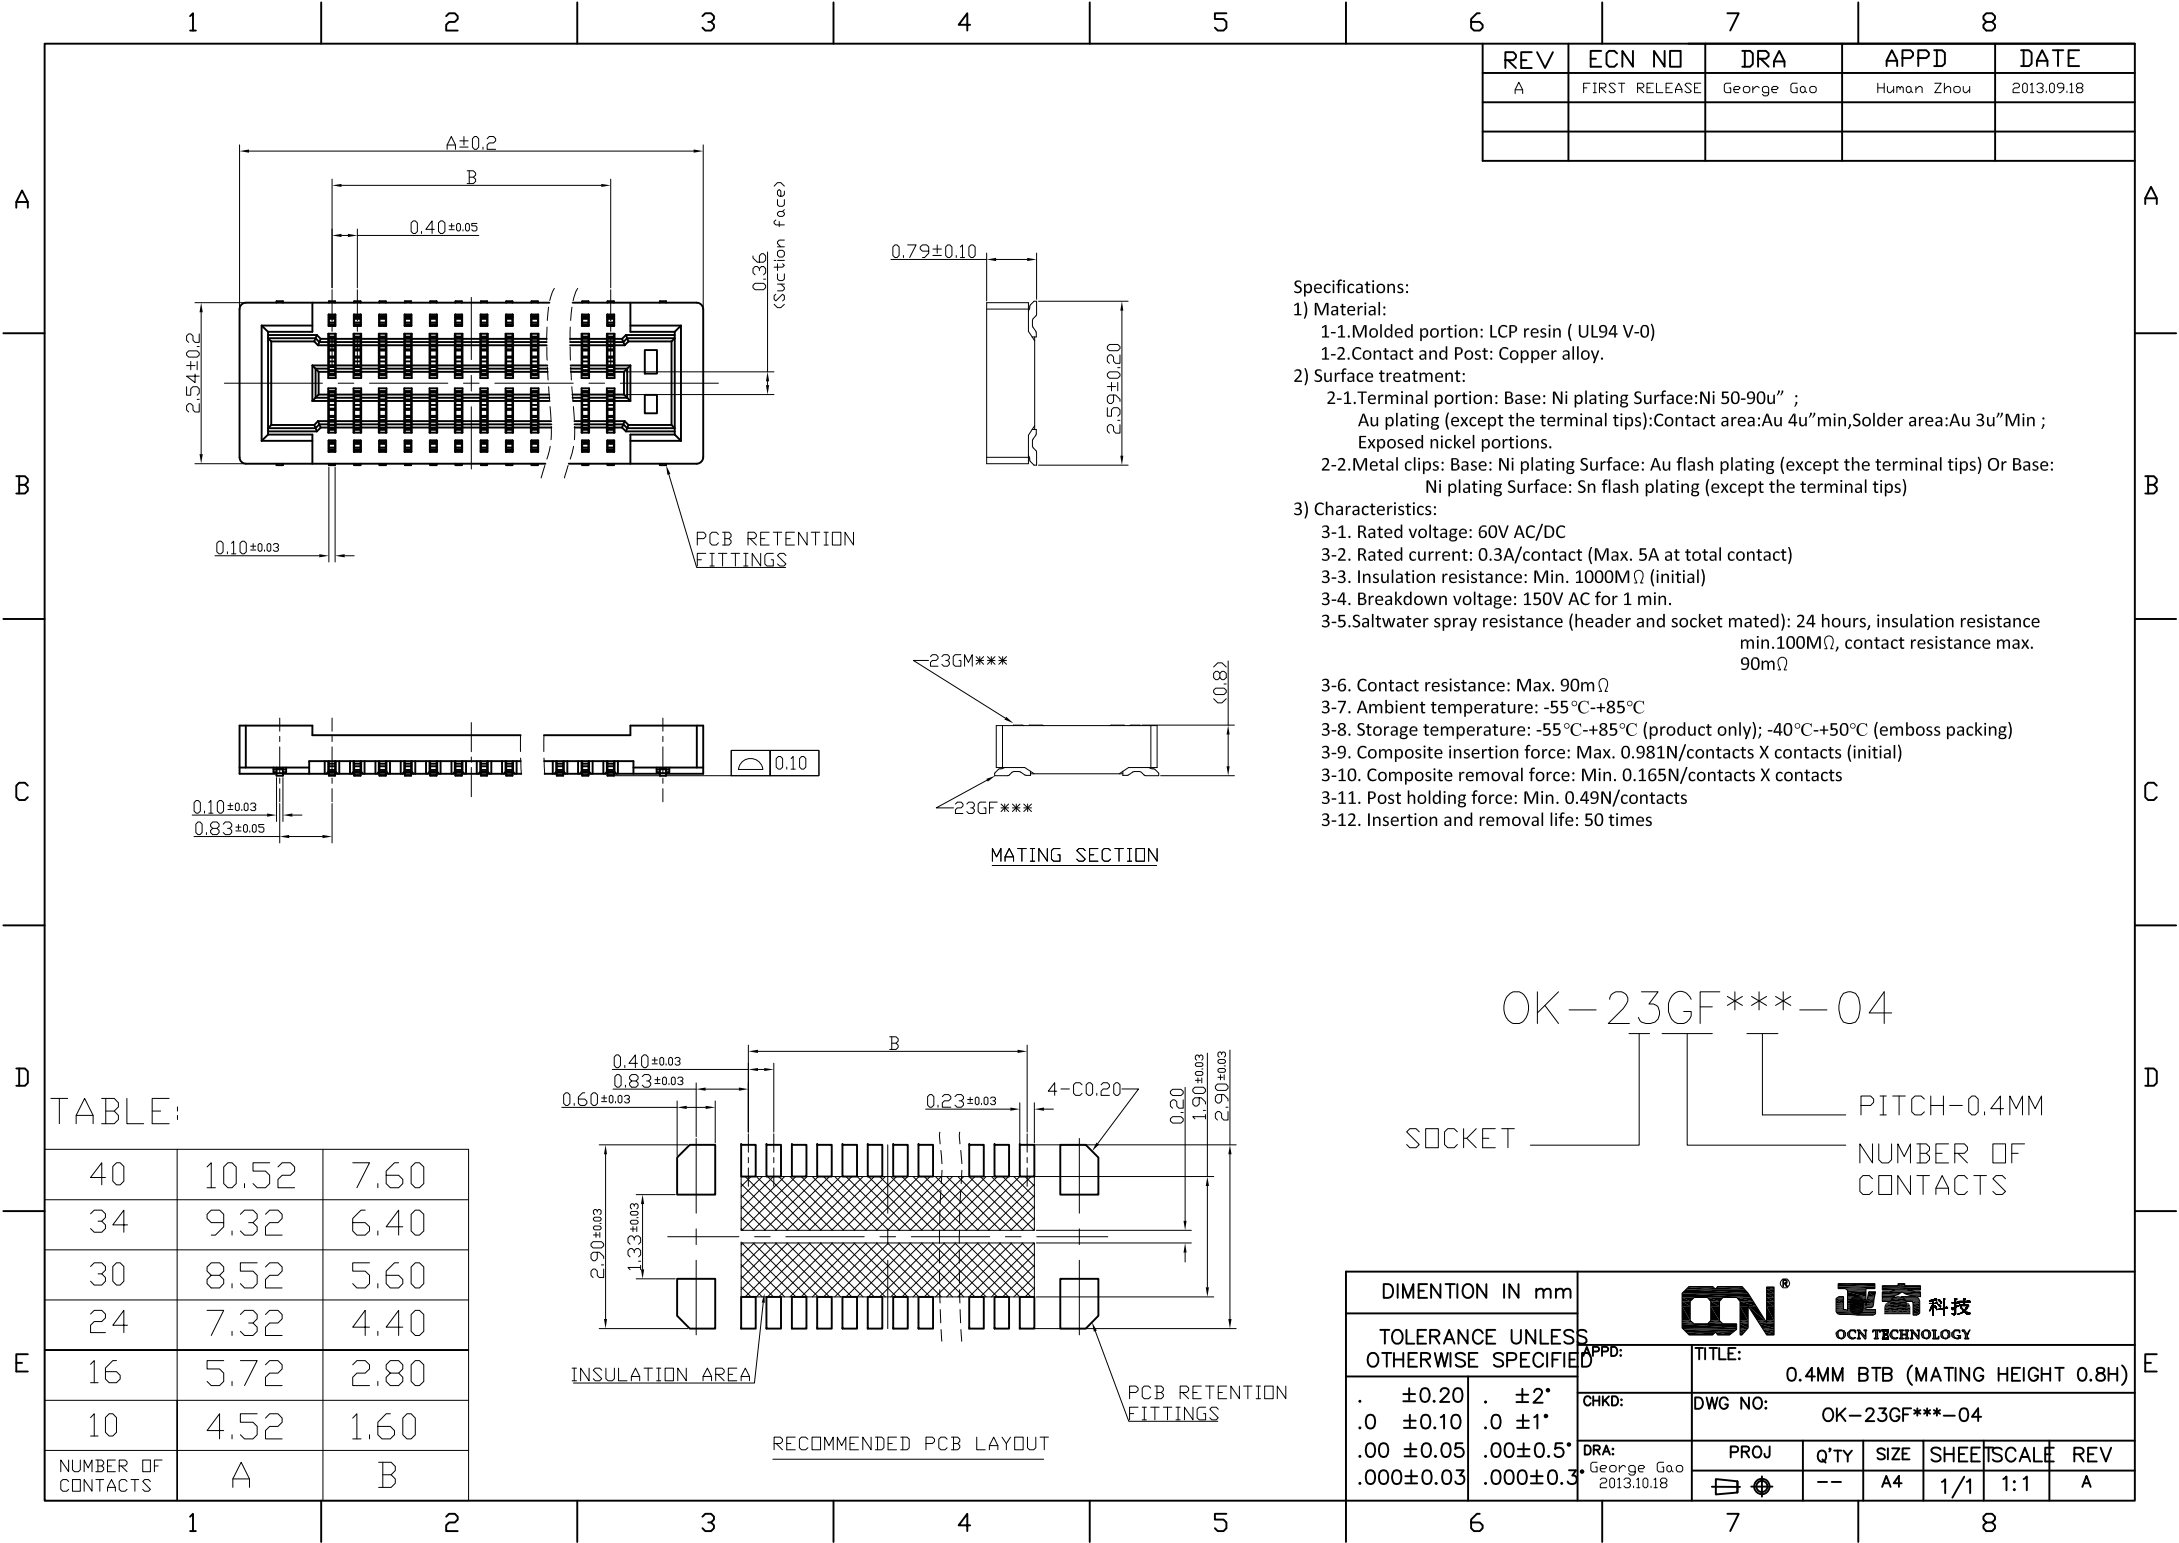


REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human Zhou	2013.09.18

- Specifications:
- 1) Material:
- 1-1.Molded portion: LCP resin (UL94 V-0)
 - 1-2.Contact and Post: Copper alloy.
- 2) Surface treatment:
- 2-1.Terminal portion: Base: Ni plating Surface:Ni 50-90u" ;
Au plating (except the terminal tips):Contact area:Au 4u"min,Solder area:Au 3u"Min ;
Exposed nickel portions.
 - 2-2.Metal clips: Base: Ni plating Surface: Au flash plating (except the terminal tips) Or Base:
Ni plating Surface: Sn flash plating (except the terminal tips)
- 3) Characteristics:
- 3-1. Rated voltage: 60V AC/DC
 - 3-2. Rated current: 0.3A/contact (Max. 5A at total contact)
 - 3-3. Insulation resistance: Min. 1000MΩ (initial)
 - 3-4. Breakdown voltage: 150V AC for 1 min.
 - 3-5.Saltwater spray resistance (header and socket mated): 24 hours, insulation resistance min.100MΩ, contact resistance max. 90mΩ
 - 3-6. Contact resistance: Max. 90mΩ
 - 3-7. Ambient temperature: -55℃+85℃
 - 3-8. Storage temperature: -55℃+85℃ (product only); -40℃+50℃ (emboss packing)
 - 3-9. Composite insertion force: Max. 0.981N/contacts X contacts (initial)
 - 3-10. Composite removal force: Min. 0.165N/contacts X contacts
 - 3-11. Post holding force: Min. 0.49N/contacts
 - 3-12. Insertion and removal life: 50 times

TABLE:

40	10.52	7.60
34	9.32	6.40
30	8.52	5.60
24	7.32	4.40
16	5.72	2.80
10	4.52	1.60
NUMBER OF CONTACTS	A	B

DIMENTION IN mm		OCN® 正奇科技 OCN TECHNOLOGY	
TOLERANCE UNLESS OTHERWISE SPECIFIED		APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)
±0.20	±2°	CHKD:	DWG NO: OK-23GF***-04
±0.10	±1°		
±0.05	±0.5°	DRA: George Gao 2013.10.18	PROJ: Q'TY: SIZE: SHEET: SCALE: REV: A
±0.03	±0.3°		

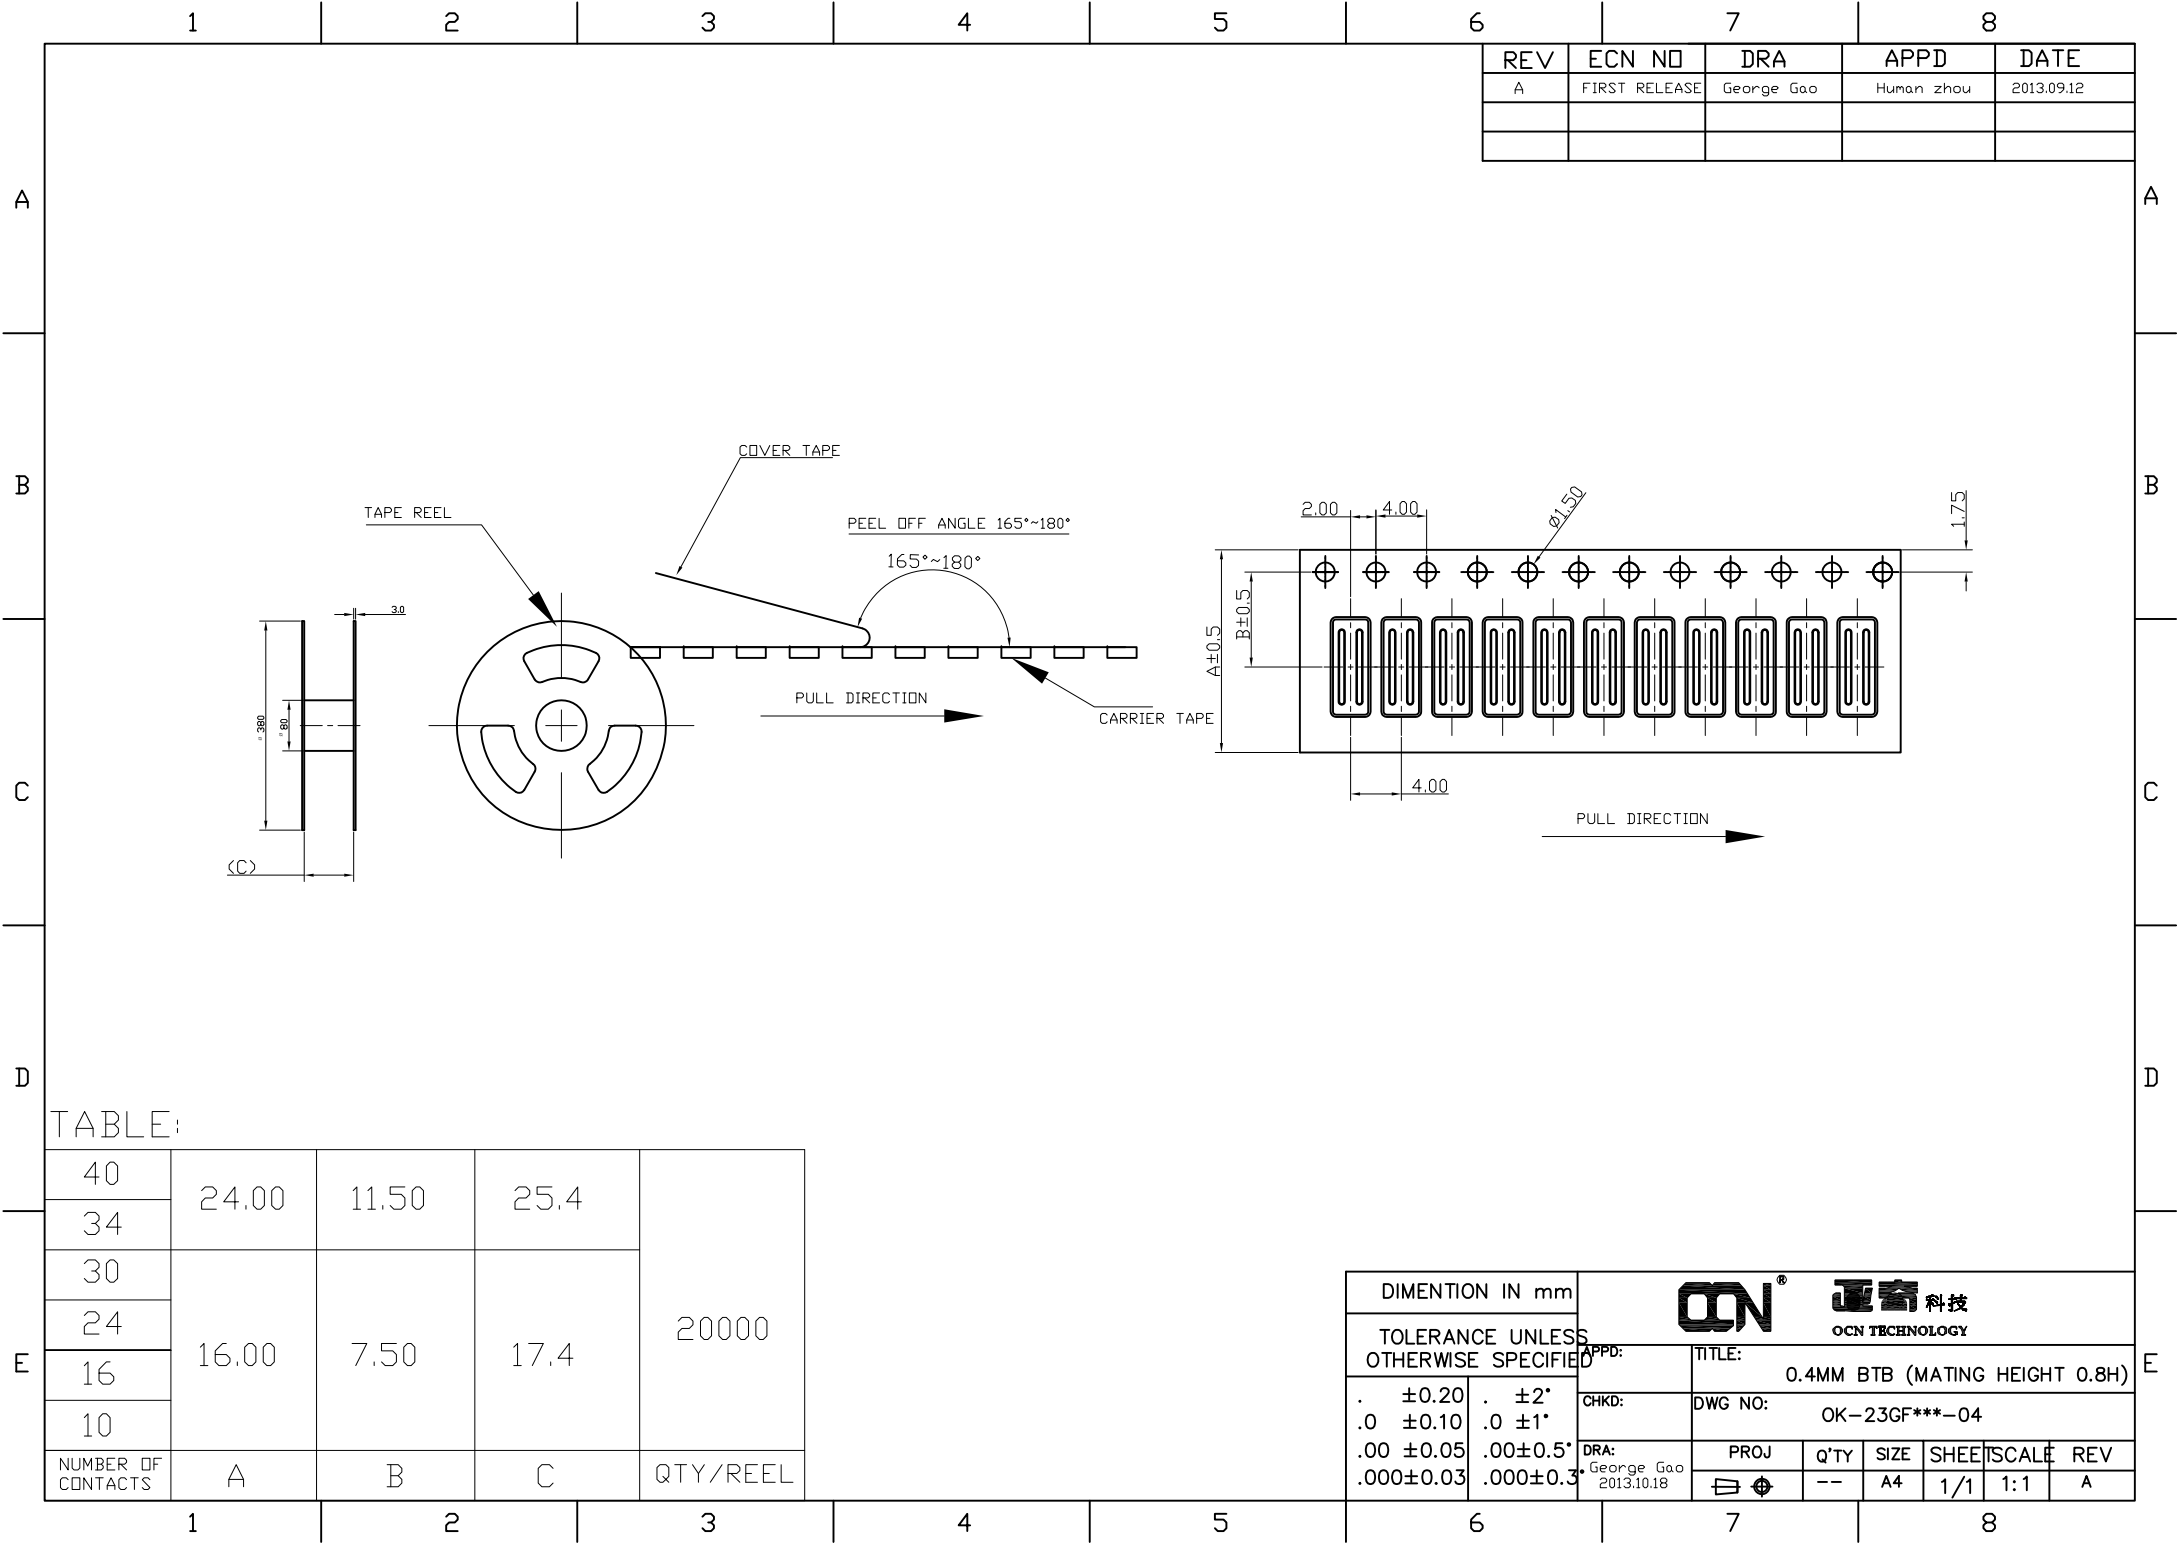

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human zhou	2013.09.12

TABLE:

40	24.00	11.50	25.4	20000
34				
30	16.00	7.50	17.4	
24				
16				
10				
NUMBER OF CONTACTS	A	B	C	QTY/REEL

DIMENTION IN mm		OCN ® 正奇科技 OCN TECHNOLOGY				
TOLERANCE UNLESS OTHERWISE SPECIFIED		APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)			
. ±0.20	. ±2°	CHKD:	DWG NO: OK-23GF***-04			
.0 ±0.10	.0 ±1°	DRA: George Gao 2013.10.18	PROJ	Q'TY	SIZE	SHEET SCALE REV
.00 ±0.05	.00±0.5°		☐ ⊕	--	A4	1/1 1:1 A
.000±0.03	.000±0.3°					