
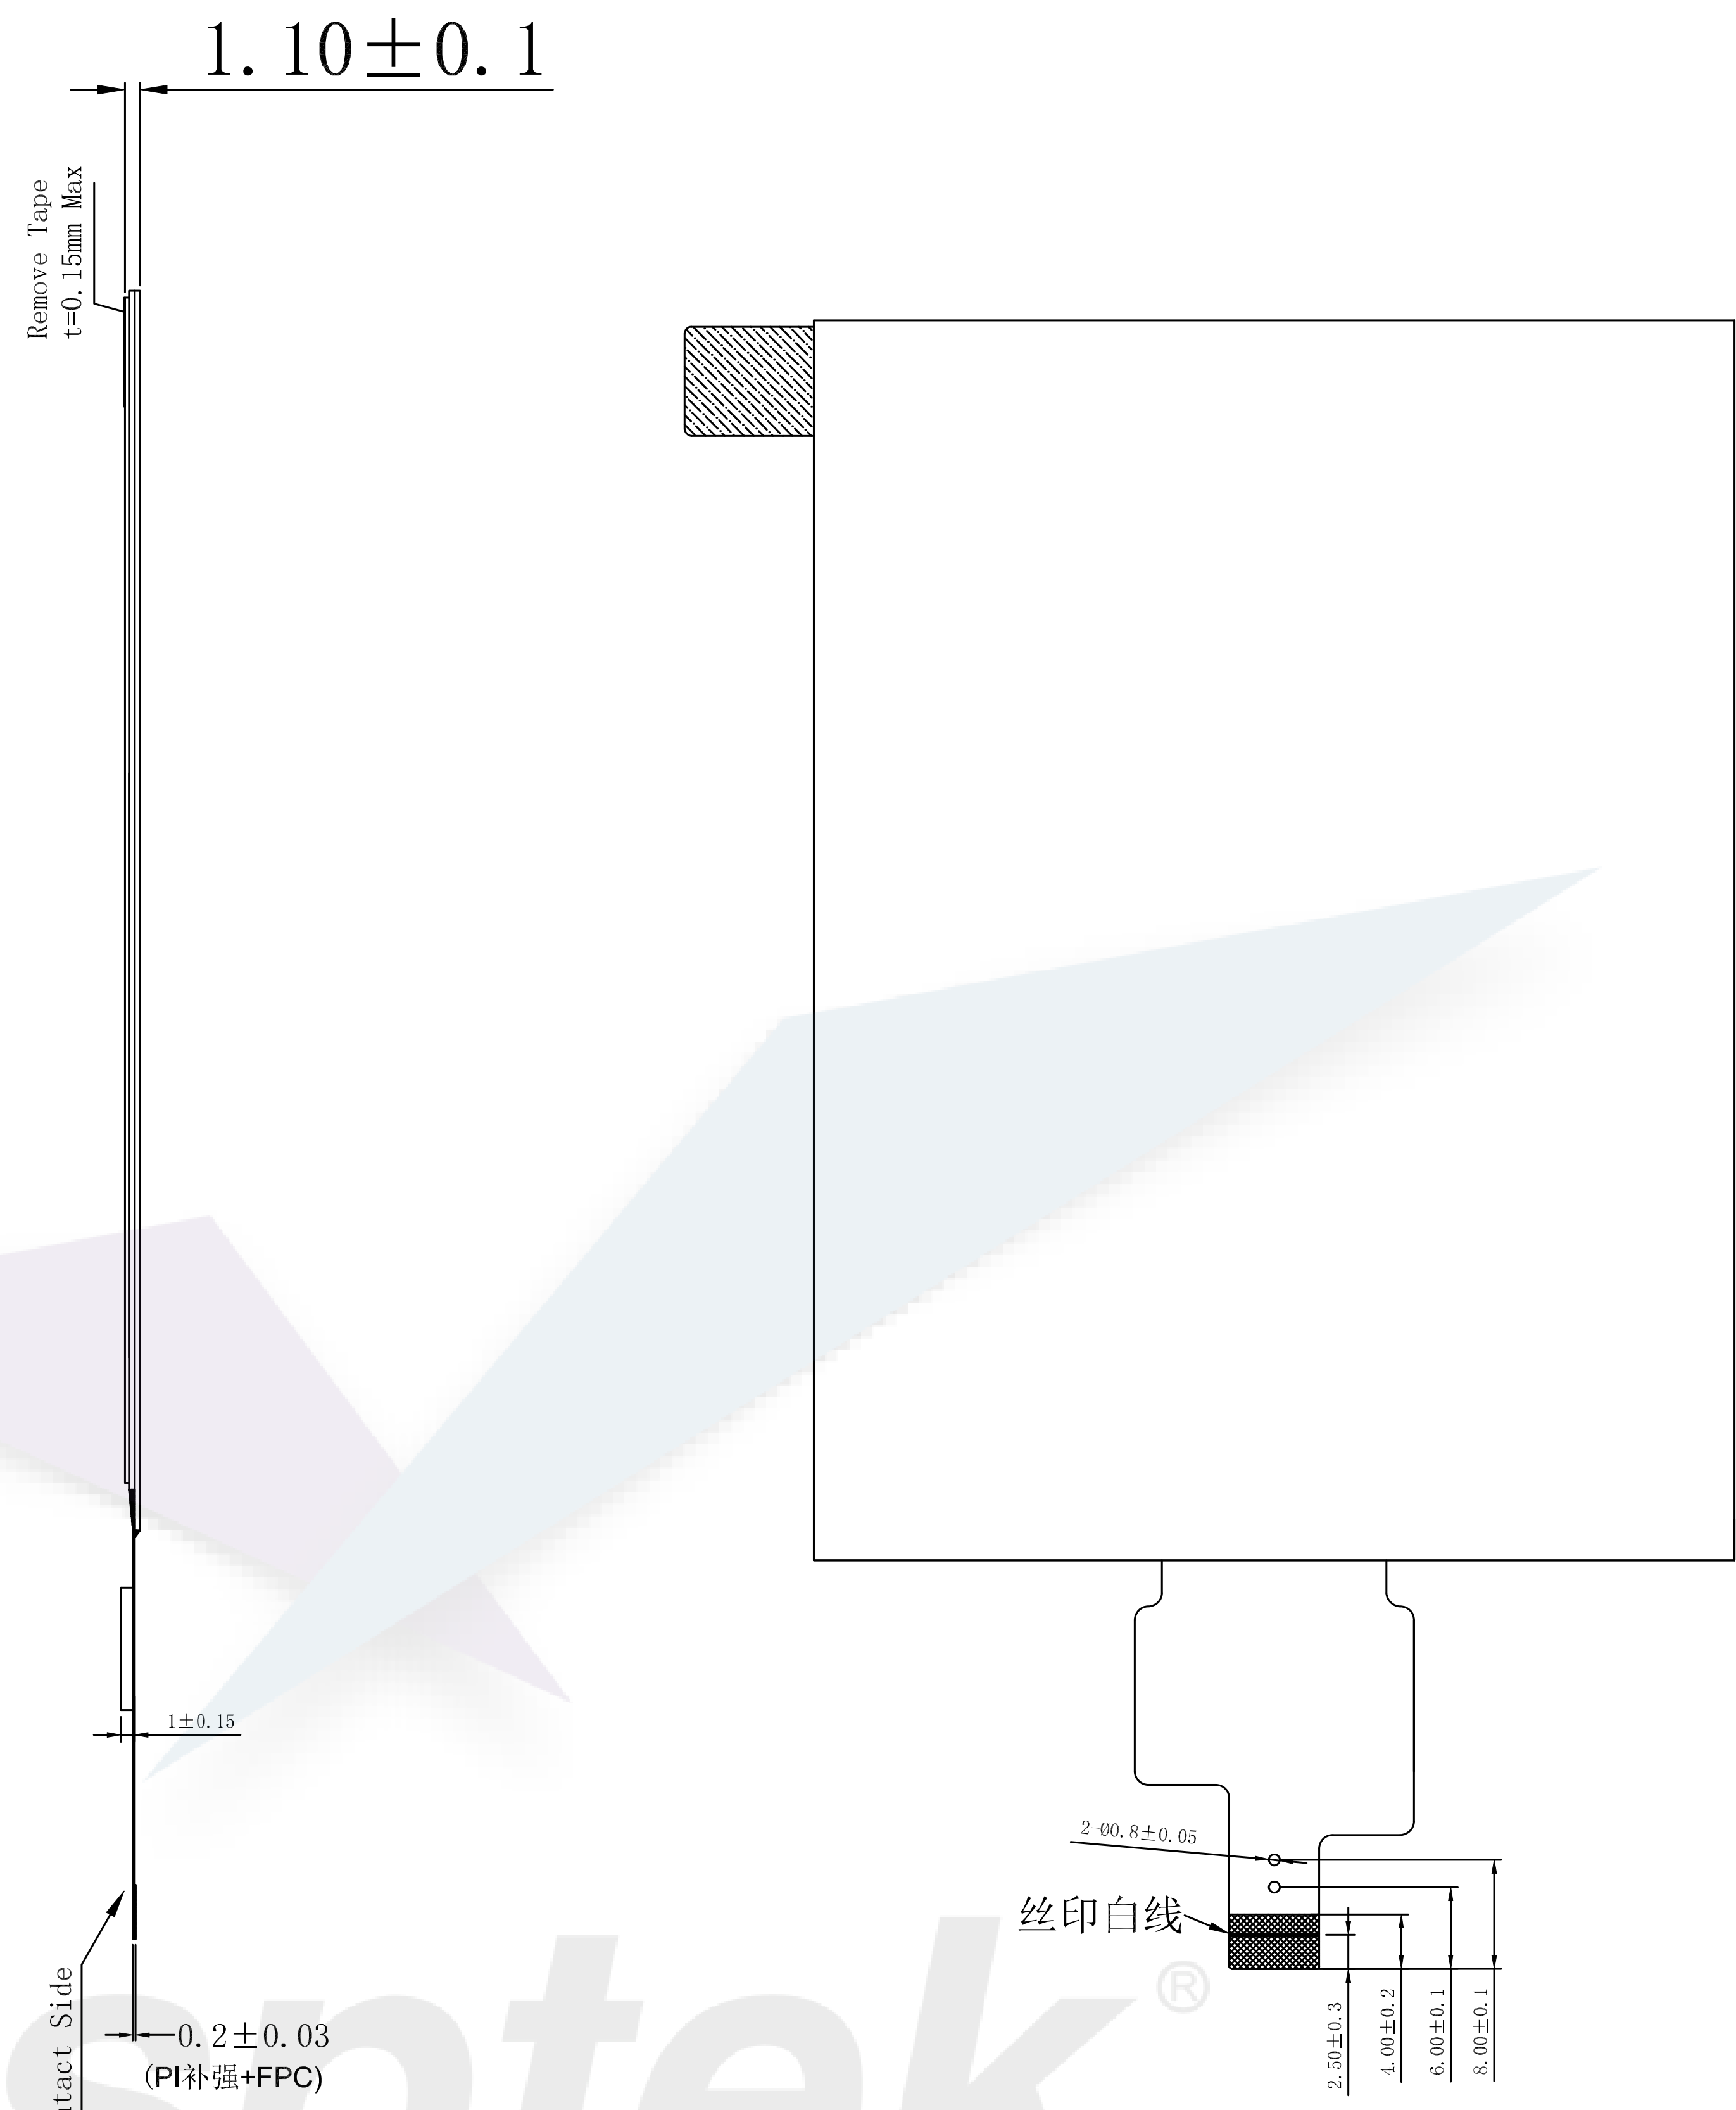


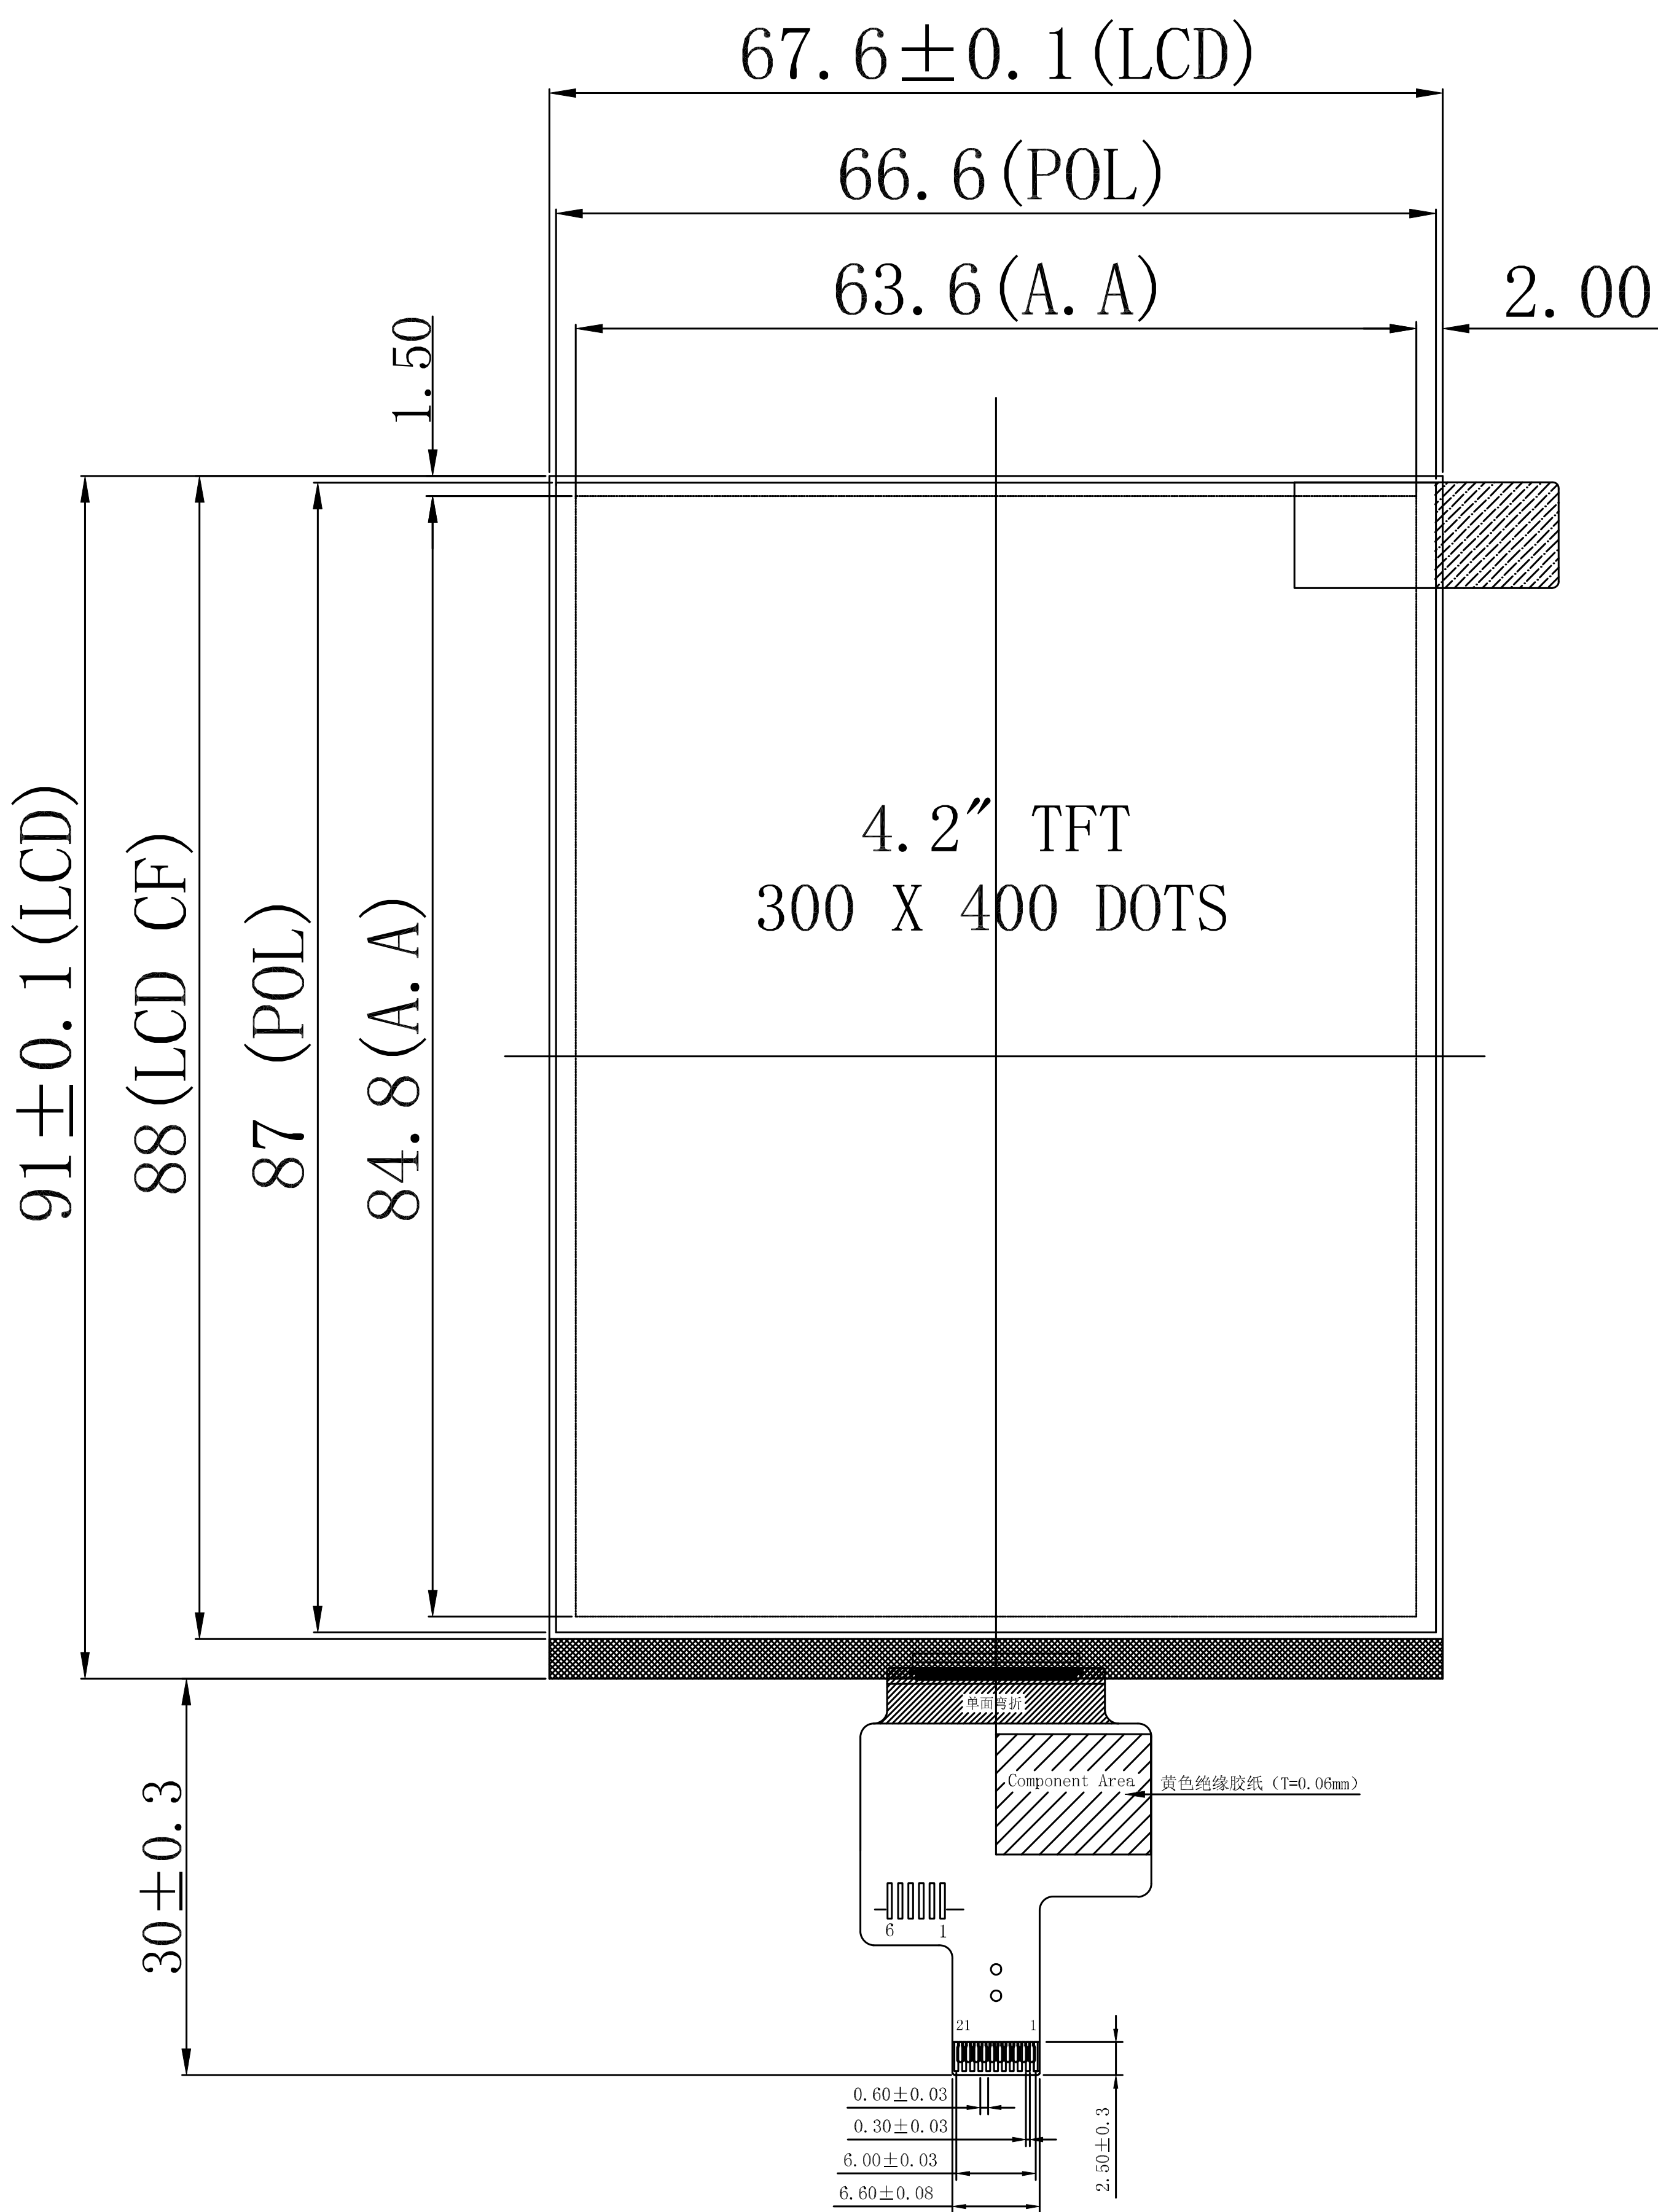

TP接口定义

NO.	SYMBOL
1	TP-VCC
2	TP-RESET
3	TP-INT
4	TP-SDA
5	TP-SCL
6	GND

NO.	SIGNAL
1	GND
2	NC
3	NC
4	GND
5	VCC (3.3V)
6	VCC (3.3V)
7	GND
8	RESET
9	SCL
10	TE
11	SDA
12	RS
13	CS
14	GND
15	TP-VDD
16	TP-RESET
17	TP-INT
18	TP-SDA
19	TP-SCL
20	GND
21	GND

NOTES:

1. DISPLAY TYPE: 4.2 inch B/W/R TFT
2. DISPLAY MODE: Normally White/Reflective Type
3. DRIVER IC:ST7306
4. OPERATING TEMP.: -20° C~70° C
5. STORAGE TEMP.: -30° C~80° C
- 6 UNMARKED TOLERANCE:±0.2
7. 建议机壳开窗可视区比 LCD A. A区单边大 0.3mm
8. 产品符合ROHS标准

接口支持：4线SPI

Customer Approval Signature	Shenzhen Osprey Optoelectronics Technology Co., Ltd.						Drawing Number		Rev.	
							4.2" TFT		A	
	Unless Otherwise Specified		Title	YDP420H005-V3				Material		
	Unit	mm						Soda Lime / Polyimide		
	General Roughness									
	Tolerance			Drawn	E. E.	Panel / E.	P. M.			
	Dimension	± 0.2	By	XU				Scale	Sheet	Size
	Angle	± 1	Date	20260711				1:1	1 of 1	A3