



Item	Date	Remark
A	20260416	Original Drawing

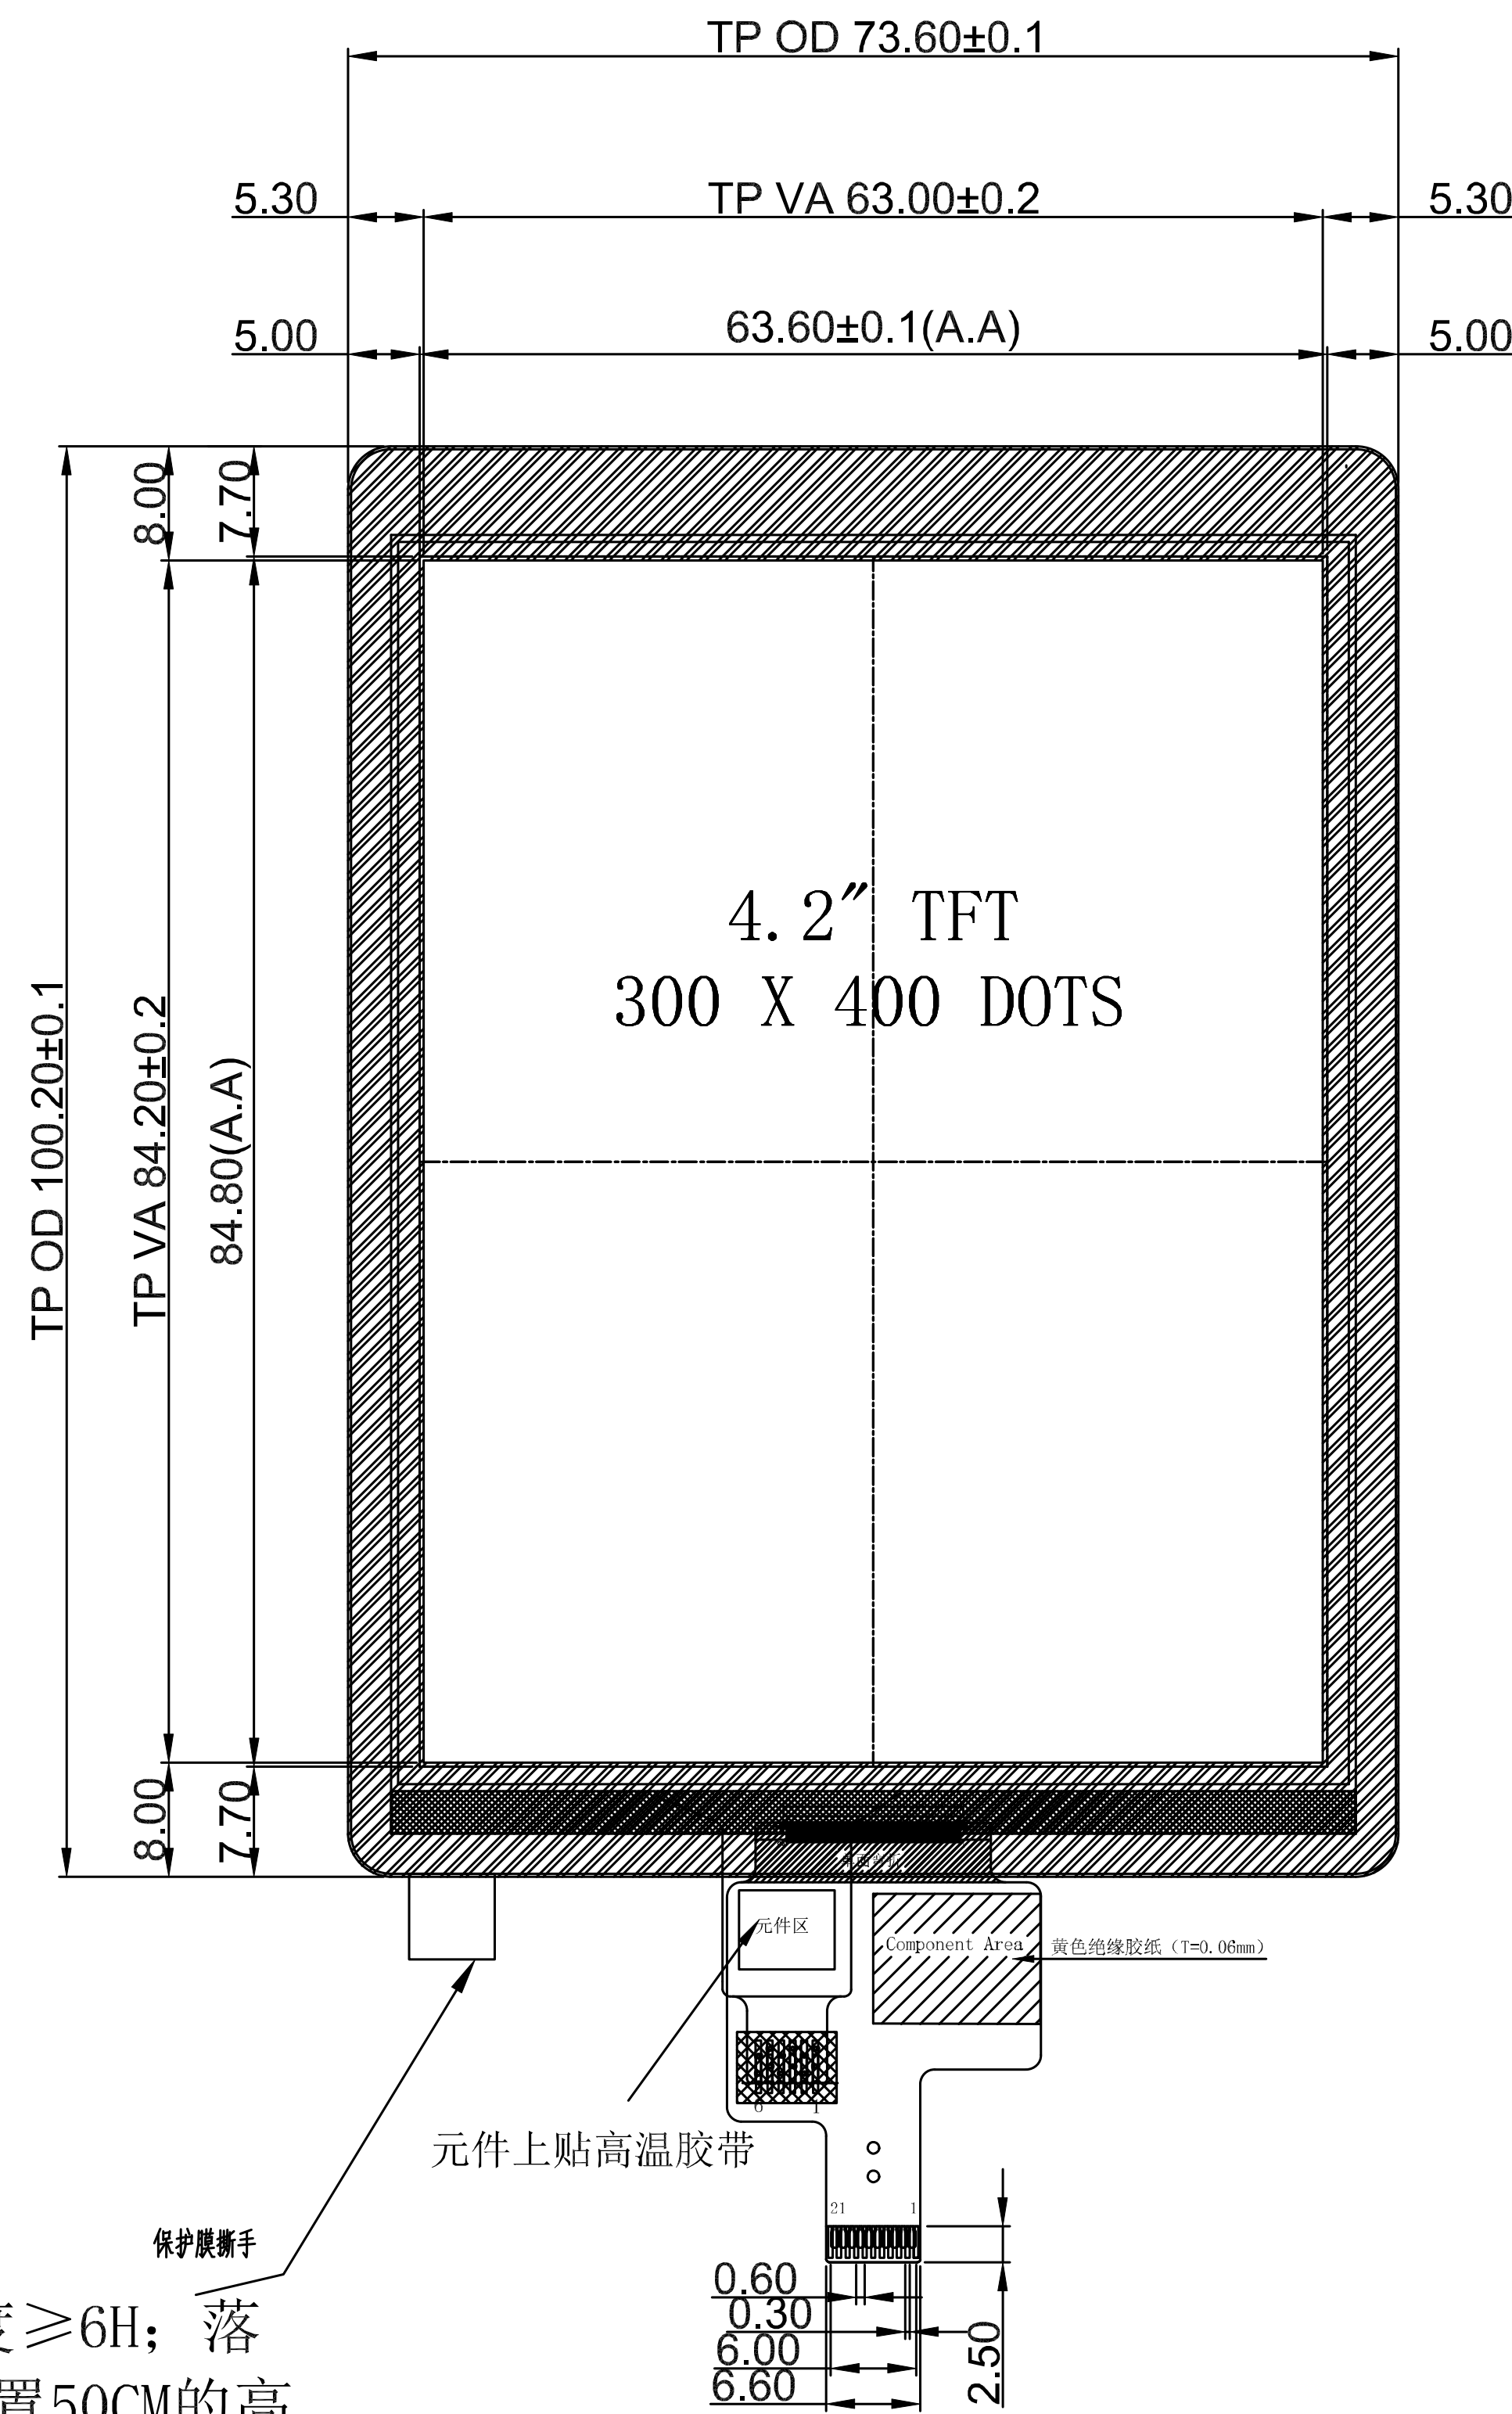

- TP 技术要求:
1. 结构: LENS+OCA+FILM 总厚度: 0.8 ± 0.1 mm(不含辅料);
 2. IC:FT3269 通道数RX24;
 3. LENS材质: 强化玻璃, 表面硬度 $\geq 6H$; 落球测试64g钢球直径25mm, 中心位置50CM的高度, 3次不破损;
 4. VA区透光率为80%以上,
 5. 工作环境: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C} \leq 80\%RH$;
 6. 存储环境: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C} \leq 85\%RH$;
 7. 产品符合RoHS标准;
 8. 静电要求:接触4KV, 空气8KV;
 9. 尺寸未注公差: ± 0.2 mm

- LCM NOTES:
1. DISPLAY TYPE: 4.2" B/W/R TFT
 2. POLARIZER MODE: Normally White/Reflective Type
 3. DRIVER IC:ST7306
 4. OPERATING TEMP.: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 5. STORAGE TEMP.: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
 6. UNMARKED TOLERANCE: ± 0.2
 7. 建议机壳开窗可视区比 LCD A. A区单边大 0.3mm
 8. 产品符合ROHS标准

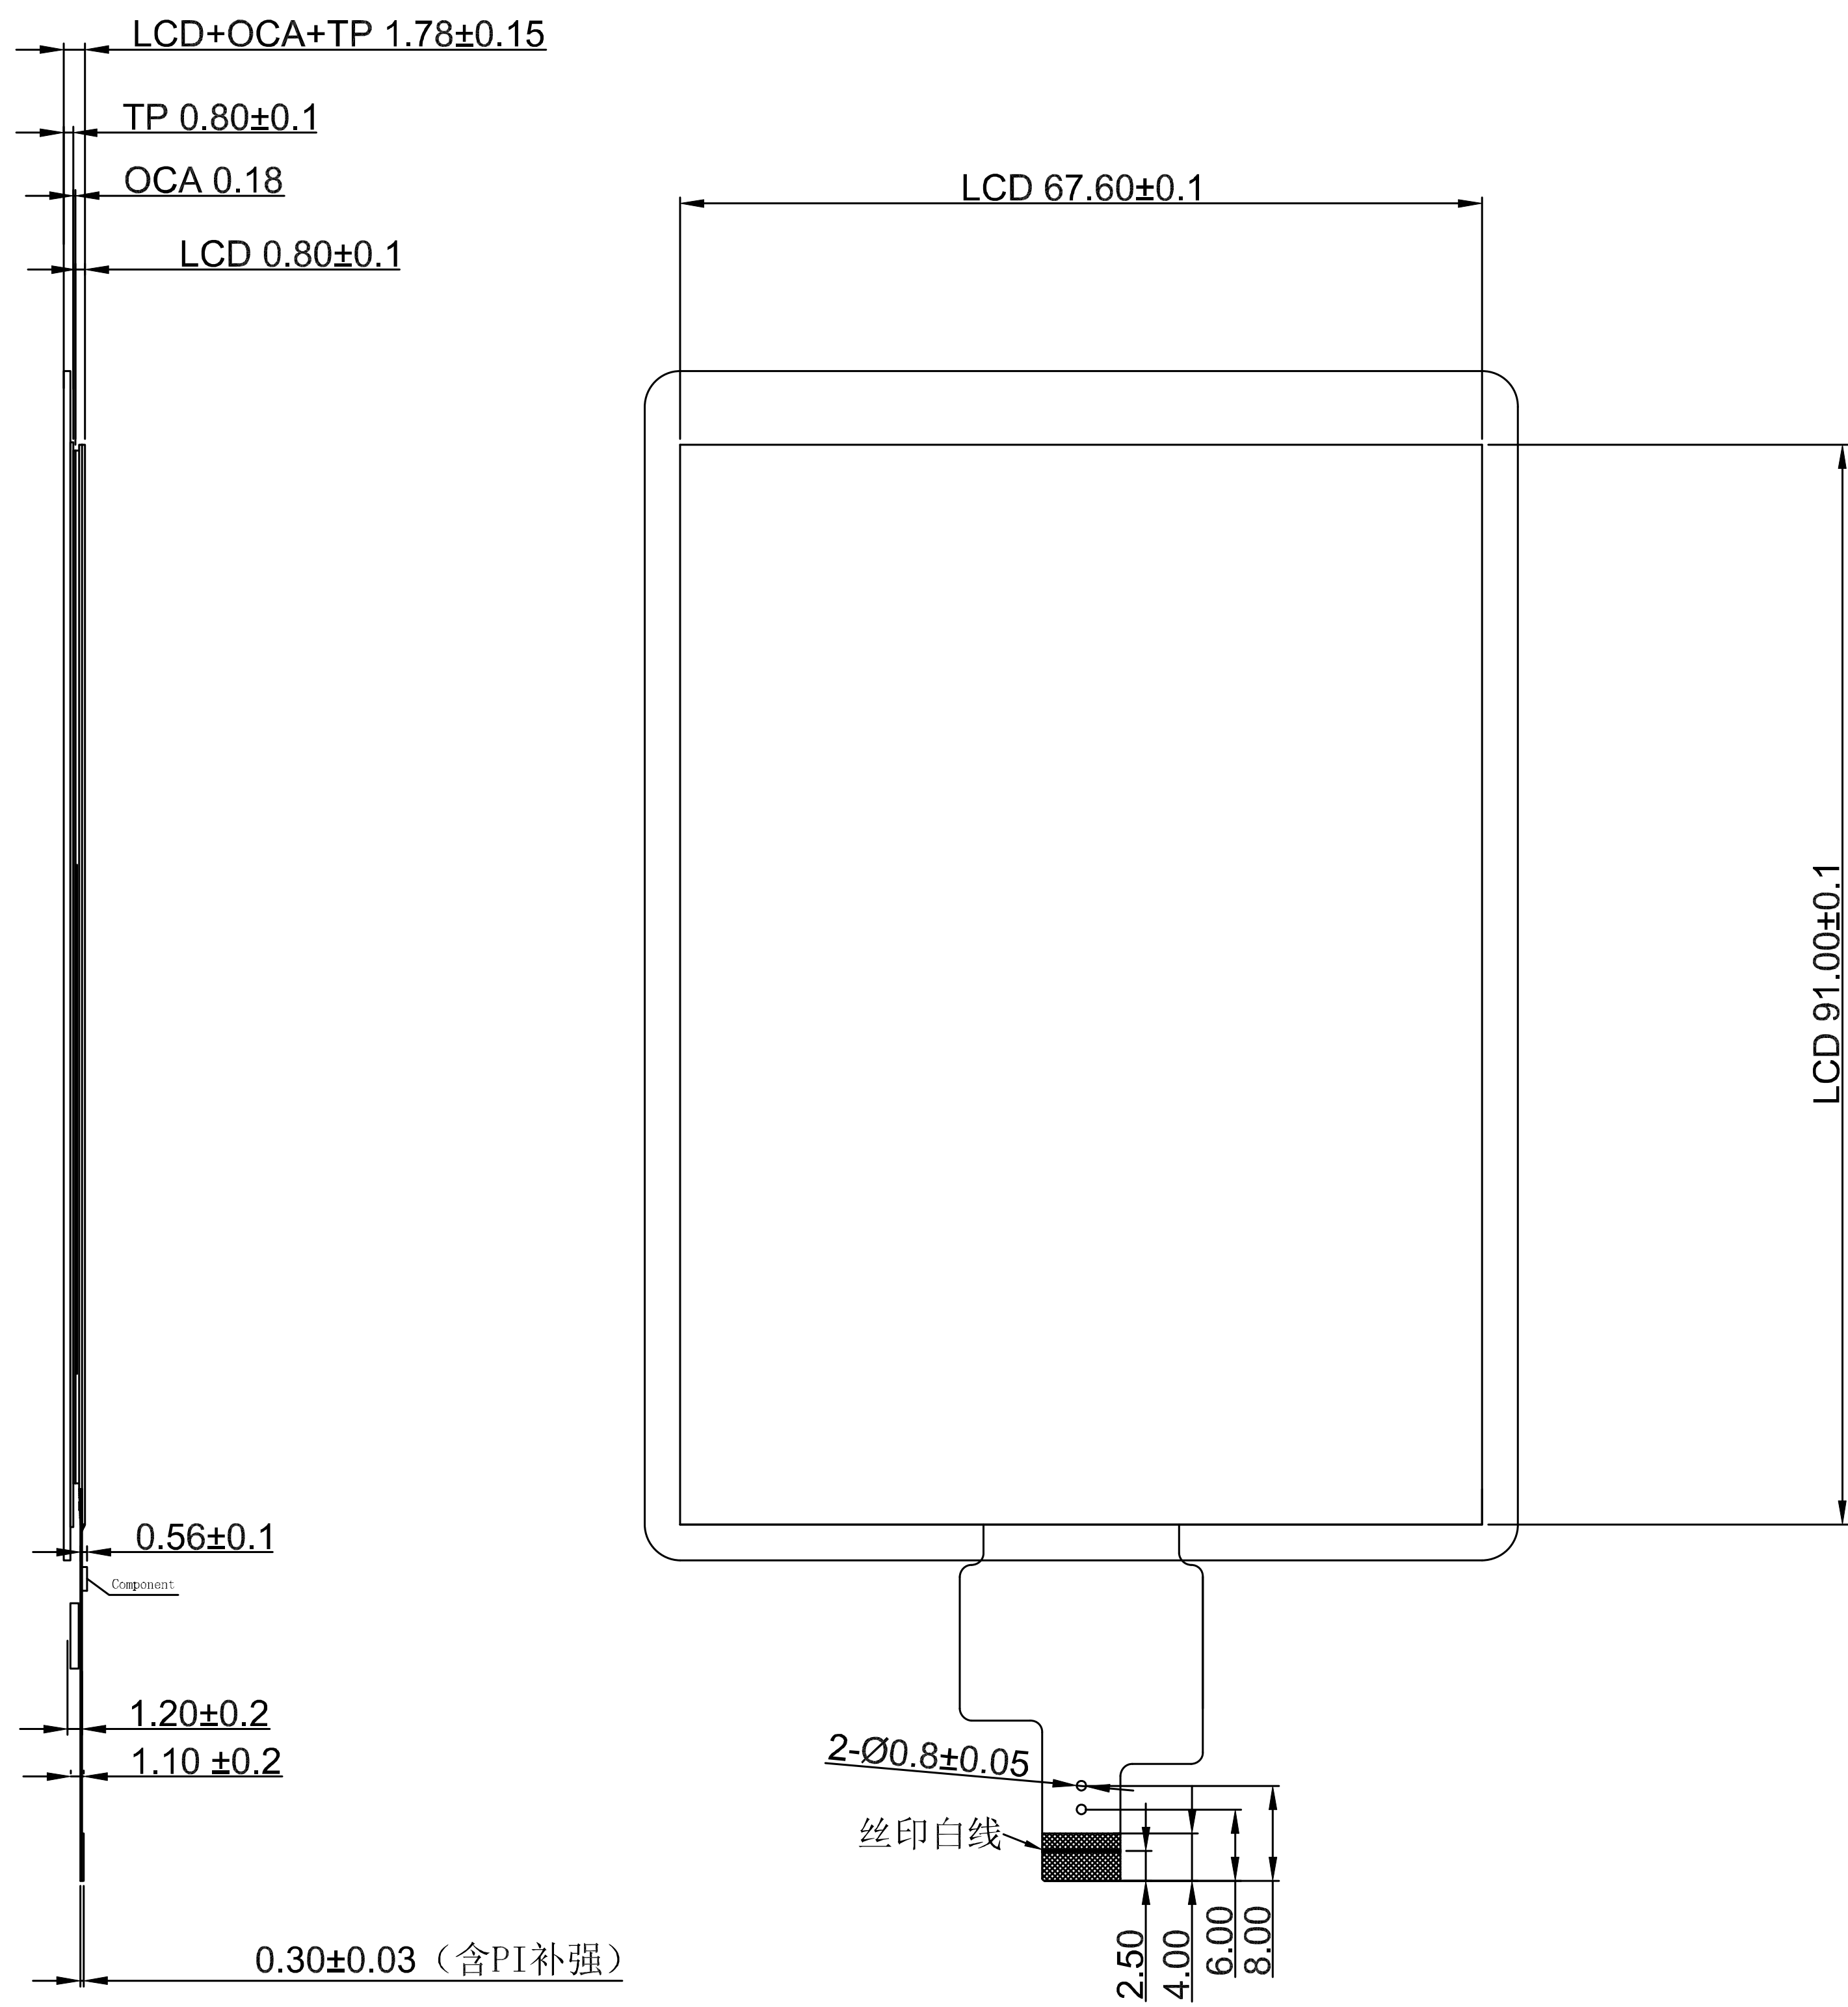

TP接口定义

NO.	SYMBOL
Pin Assignment	
1	TP-VCC
2	TP-RESET
3	TP-INT
4	TP-SDA
5	TP-SCL
6	GND

NO.	SIGNAL
1	GND
2	NC
3	NC
4	GND
5	VCC (3.3V)
6	VCC (3.3V)
7	GND
8	RESET
9	SCL
10	TE
11	SDA
12	RS
13	CS
14	GND
15	TP-VDD
16	TP-RESET
17	TP-INT
18	TP-SDA
19	TP-SCL
20	GND
21	GND

接口支持: 4线SPI

							Drawing Number		Rev.
							4.2'' TFT		C
Unless Otherwise Specified		Title	YDP420HT005-V3				Material		
Unit	mm						Soda Lime / Polyimide		
General Roughness									
Tolerance									
Dimension	±0.2	By	Drawn	E. E.	Panel / E.	P. M.	Scale	Sheet	Size
Angle	±1	Date	20260416				1:1	1 of 1	A3