

注：标注 * 请重点确认

NO.	DESCRIPTION	DATE





正视图

侧视图

背视图

弯折图

Q-SPI

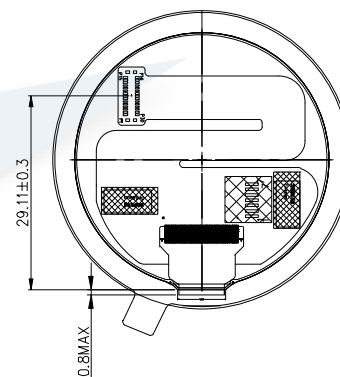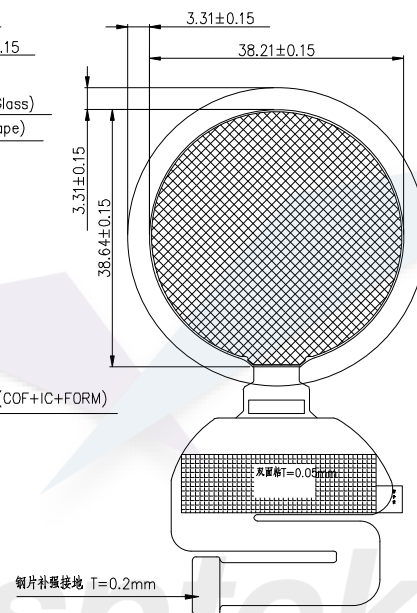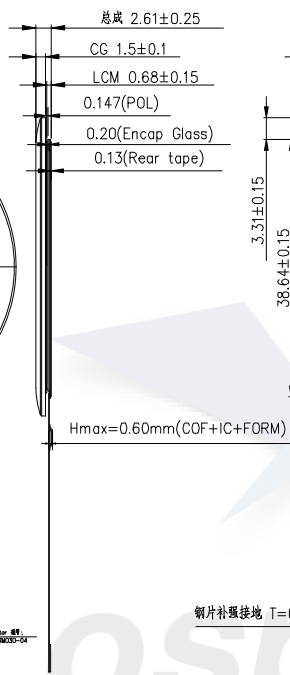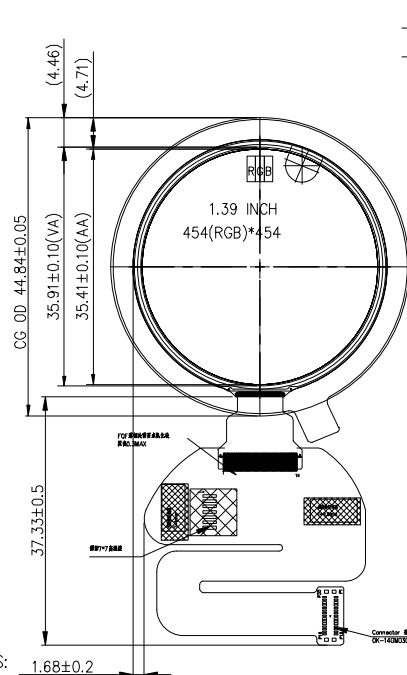

No.	Symbol
1	ELVDD
2	ELVDD
3	GND
4	GND
5	GND
6	GND
7	GND
8	GND
9	CSX
10	TE
11	RST
12	WRX_SCL
13	GND
14	GND
15	VDDIO
16	TP_VDD
17	TP_INT
18	TP_RST
19	TP_SCL
20	TP_SDA
21	NC
22	VCI
23	VDDIO
24	SWIRE
25	SDI3
26	SDI2
27	SDI1
28	SDIO
29	ELVSS
30	ELVSS

- NOTES:
1. OPERATING TEMPERATURE: -10°C TO 60°C
 2. STORAGE TEMPERATURE: -20°C TO 70°C
 3. DRIVING IC: SH8601A
TOUCH IC: /
 4. DISPLAY MODE: LTPS-AMOLED
 5. GENERAL TOLERANCE: ±0.20mm
() MEANS DIMENSION FOR REFERENCE
 6. SPECIAL REQUIRE: NO
 7. THE COLOR COORDINATES: X=0.30±0.03 ; Y=0.31±0.03
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS .

深圳市鱼鹰光电科技有限公司

Shenzhen Osprey Optoelectronics Technology Co., Ltd.

DRAWING No. : AM139Q454454FLS1

DRAWING TITLE: 总成

REV. : A

SCALE : -

PROJECTION:

UNIT : MM

PROJECTION:

SHEET : 1/1

DESIGN	zzh	CHECK	XXX	APPROVE	XXX
DATE	2025.7.10	DATE	YY.MM.DD	DATE	YY.MM.DD