

注：标注 * 请重点确认


NO.	DESCRIPTION	DATE
A	首次发行	2025-11-10

正视图



侧视图

背视图

弯折图

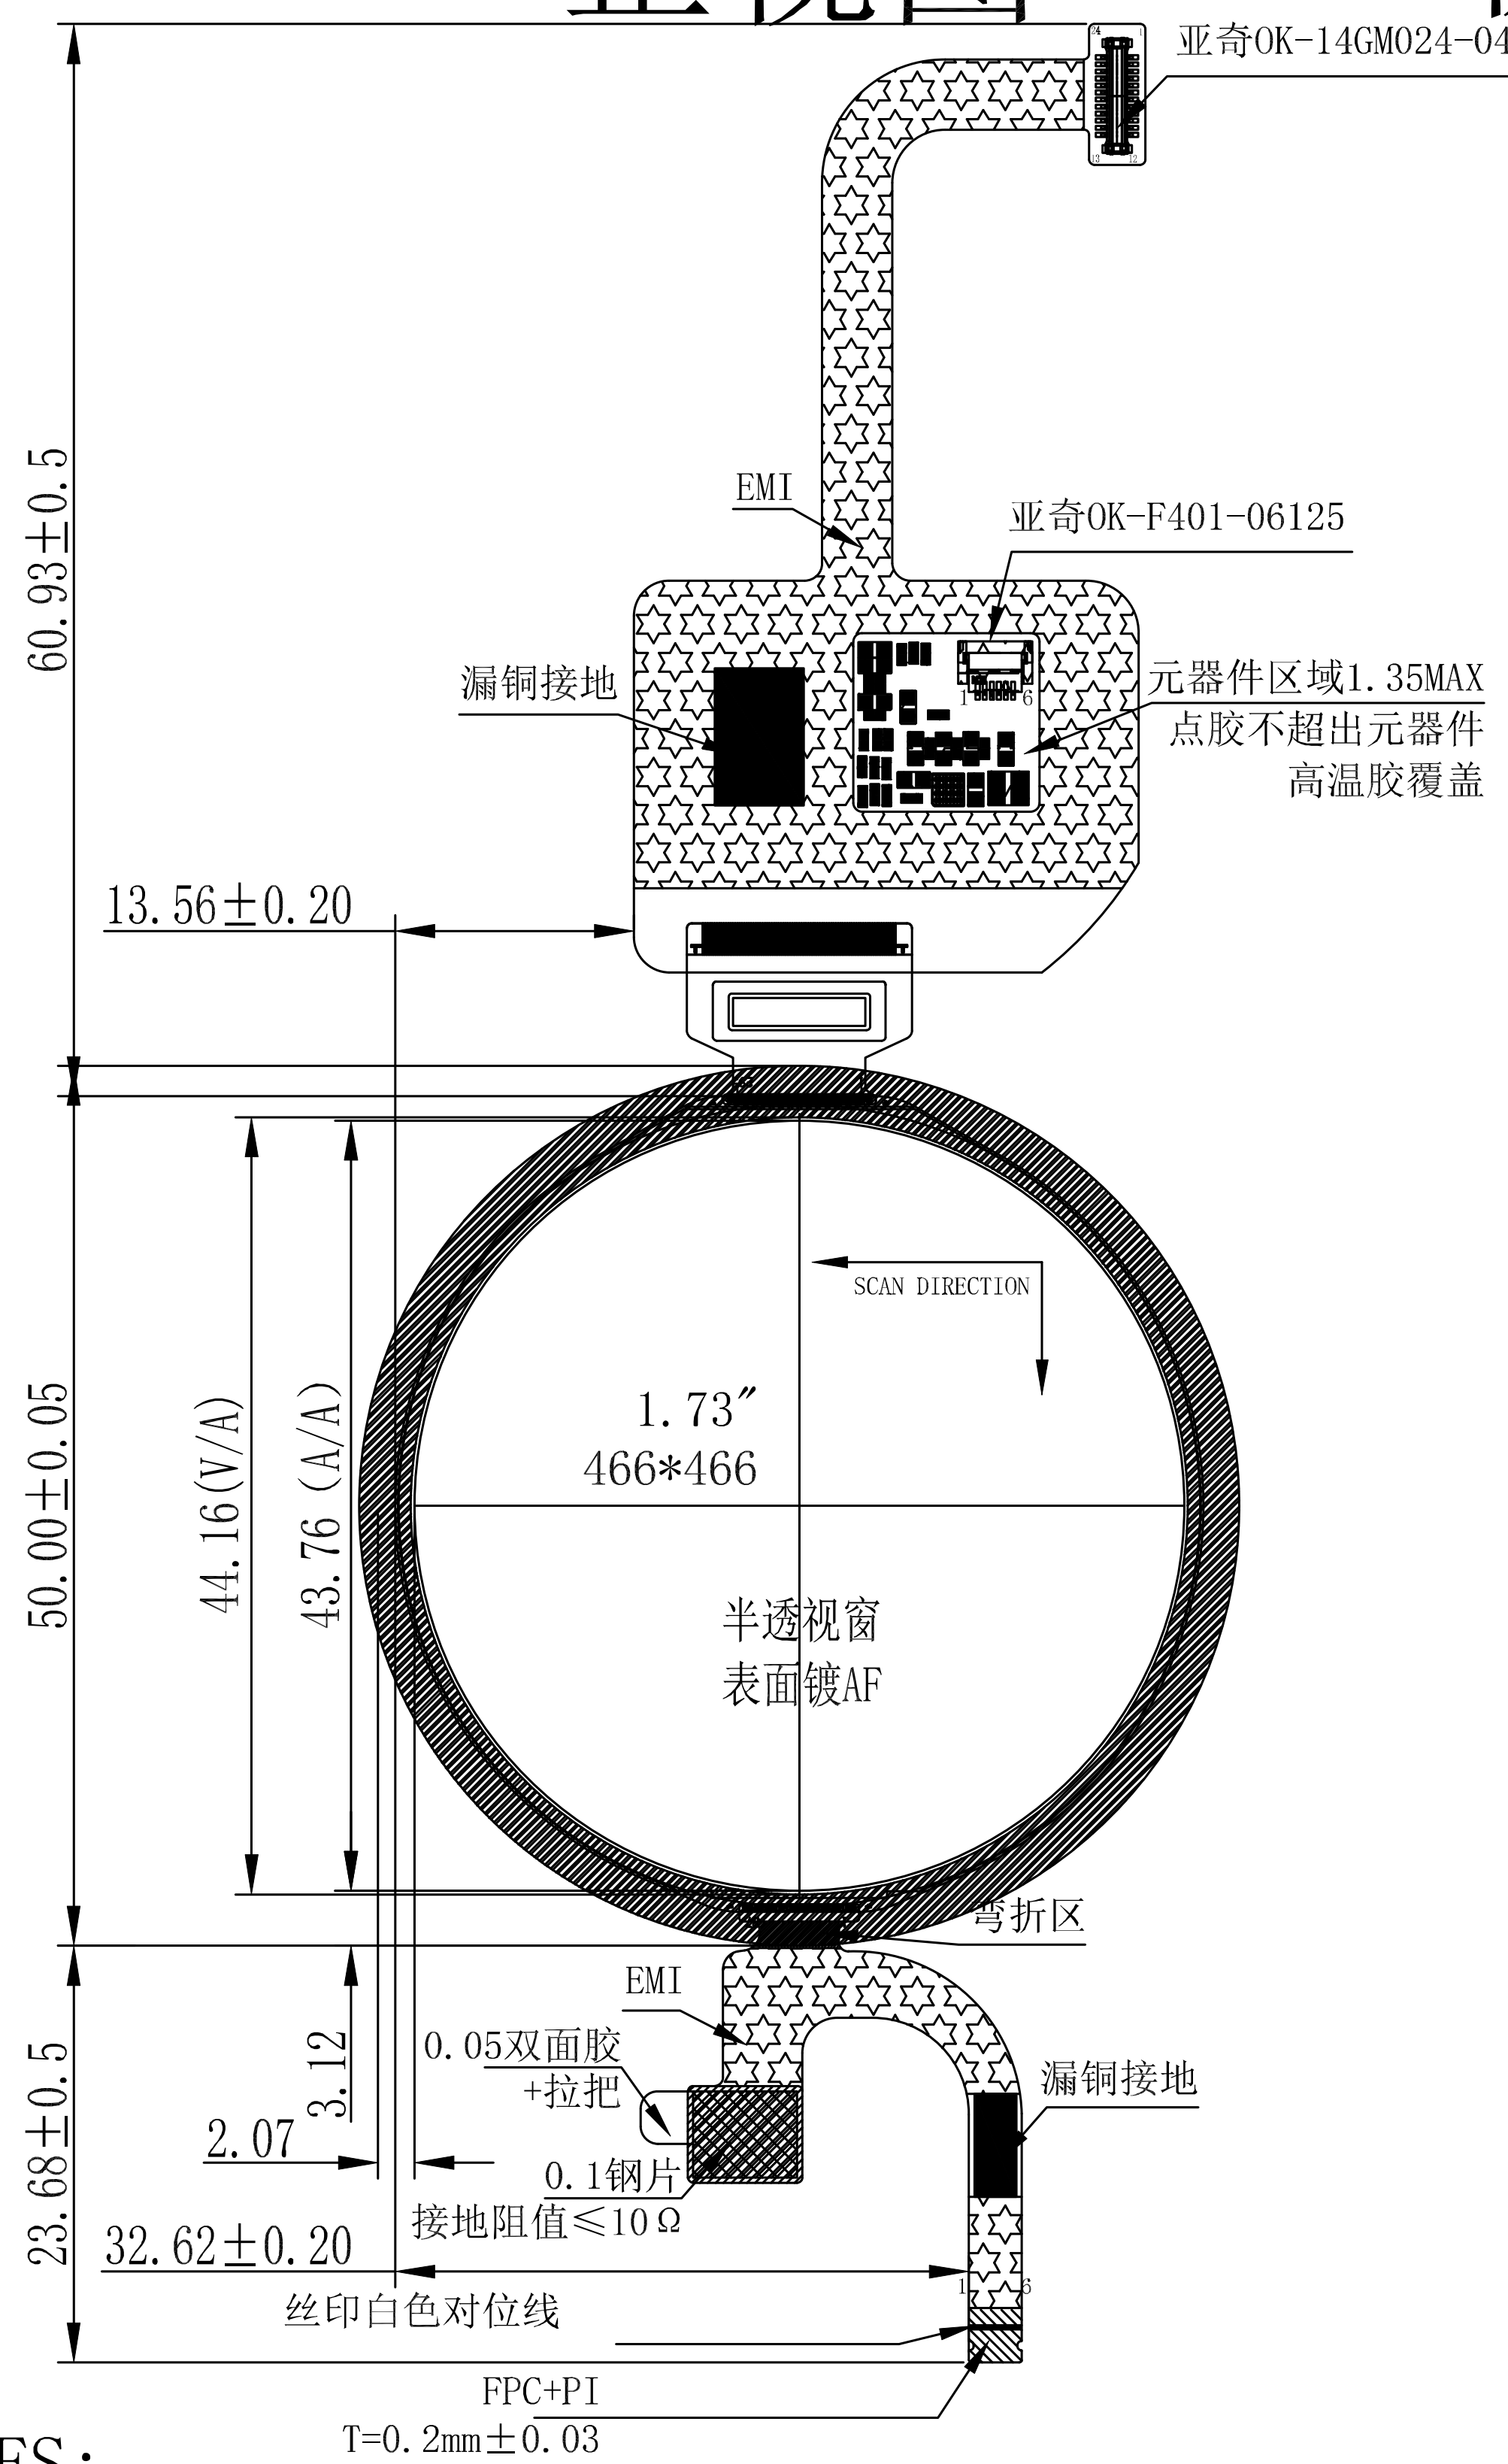

- 2.06±0.20
- 0.18 (OCA)
- 0.78±0.1 (LCM)
- 0.15 (POL)
- 0.30 (ENCAP)
- 0.20 (LTPS)
- 0.13 (FOAM)

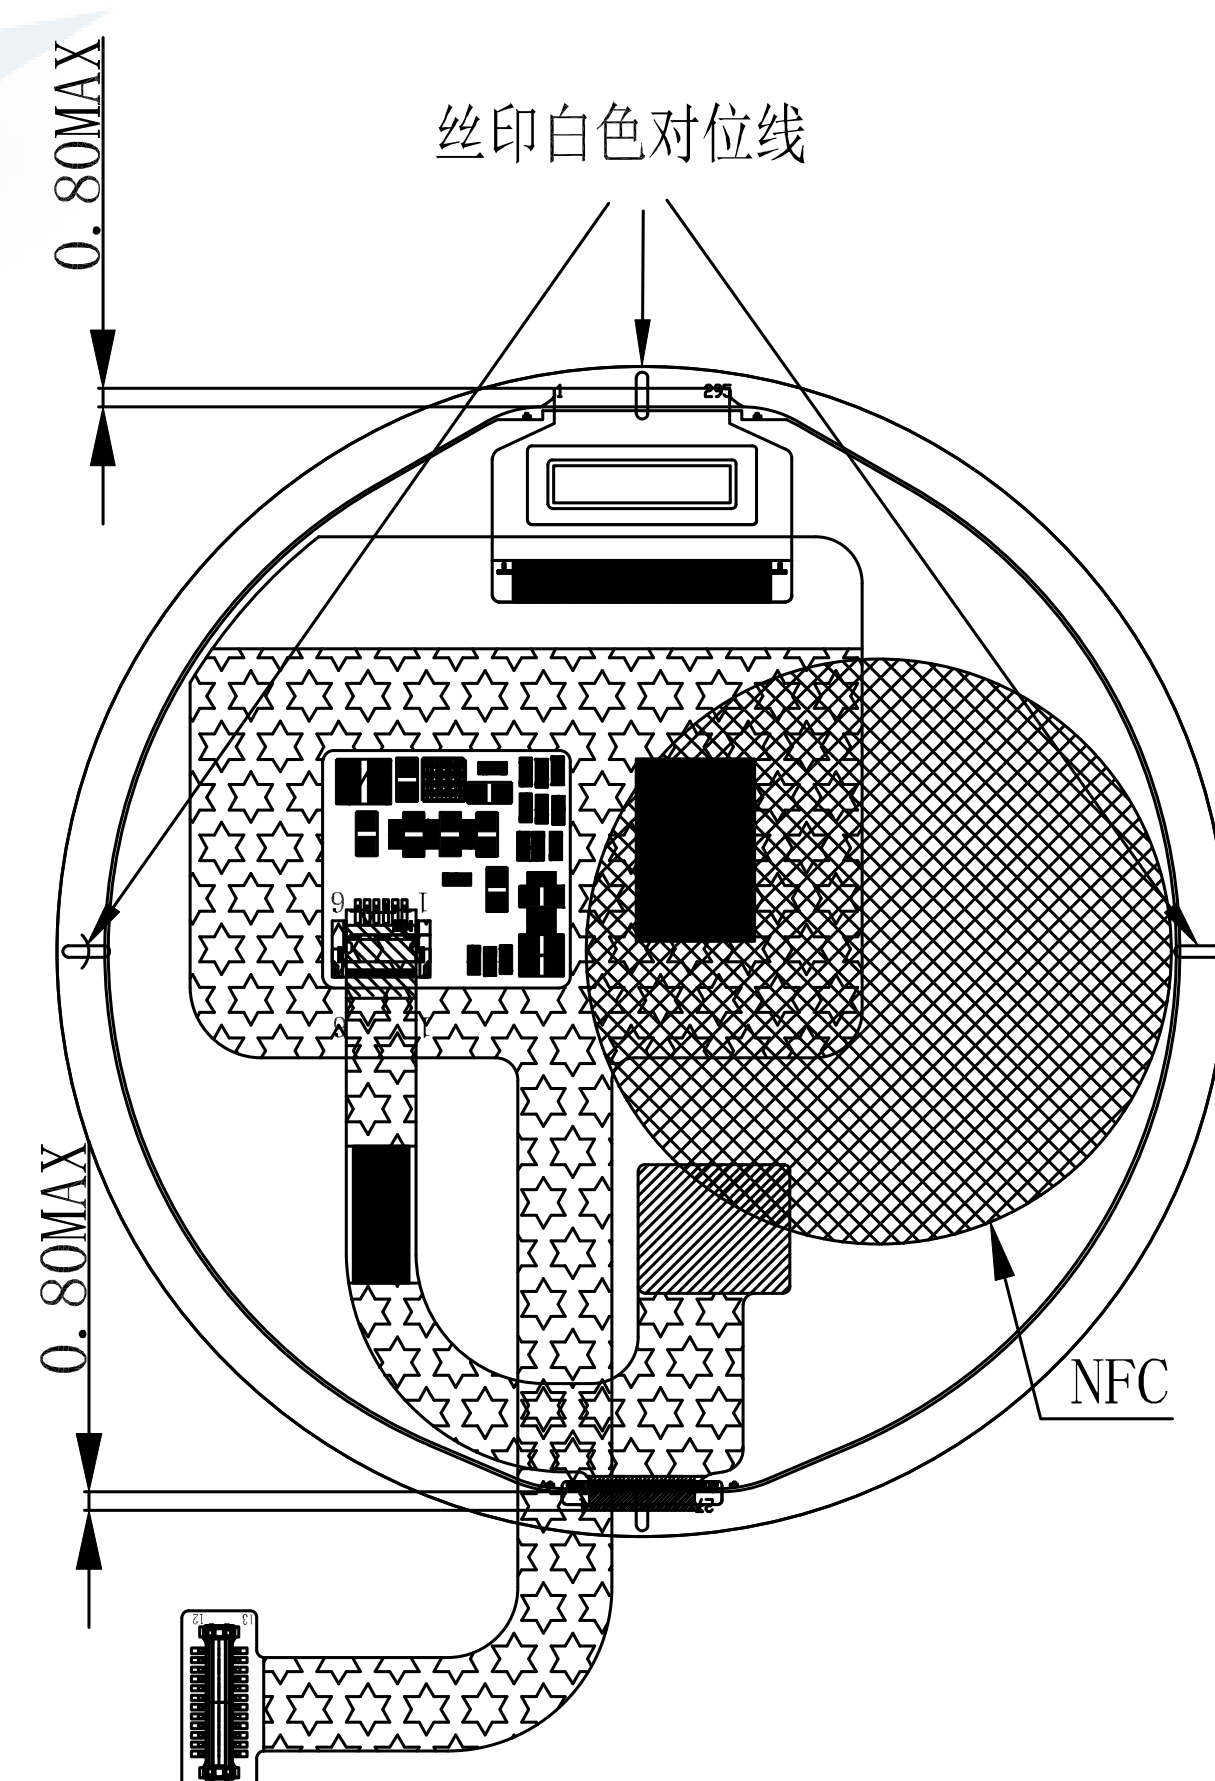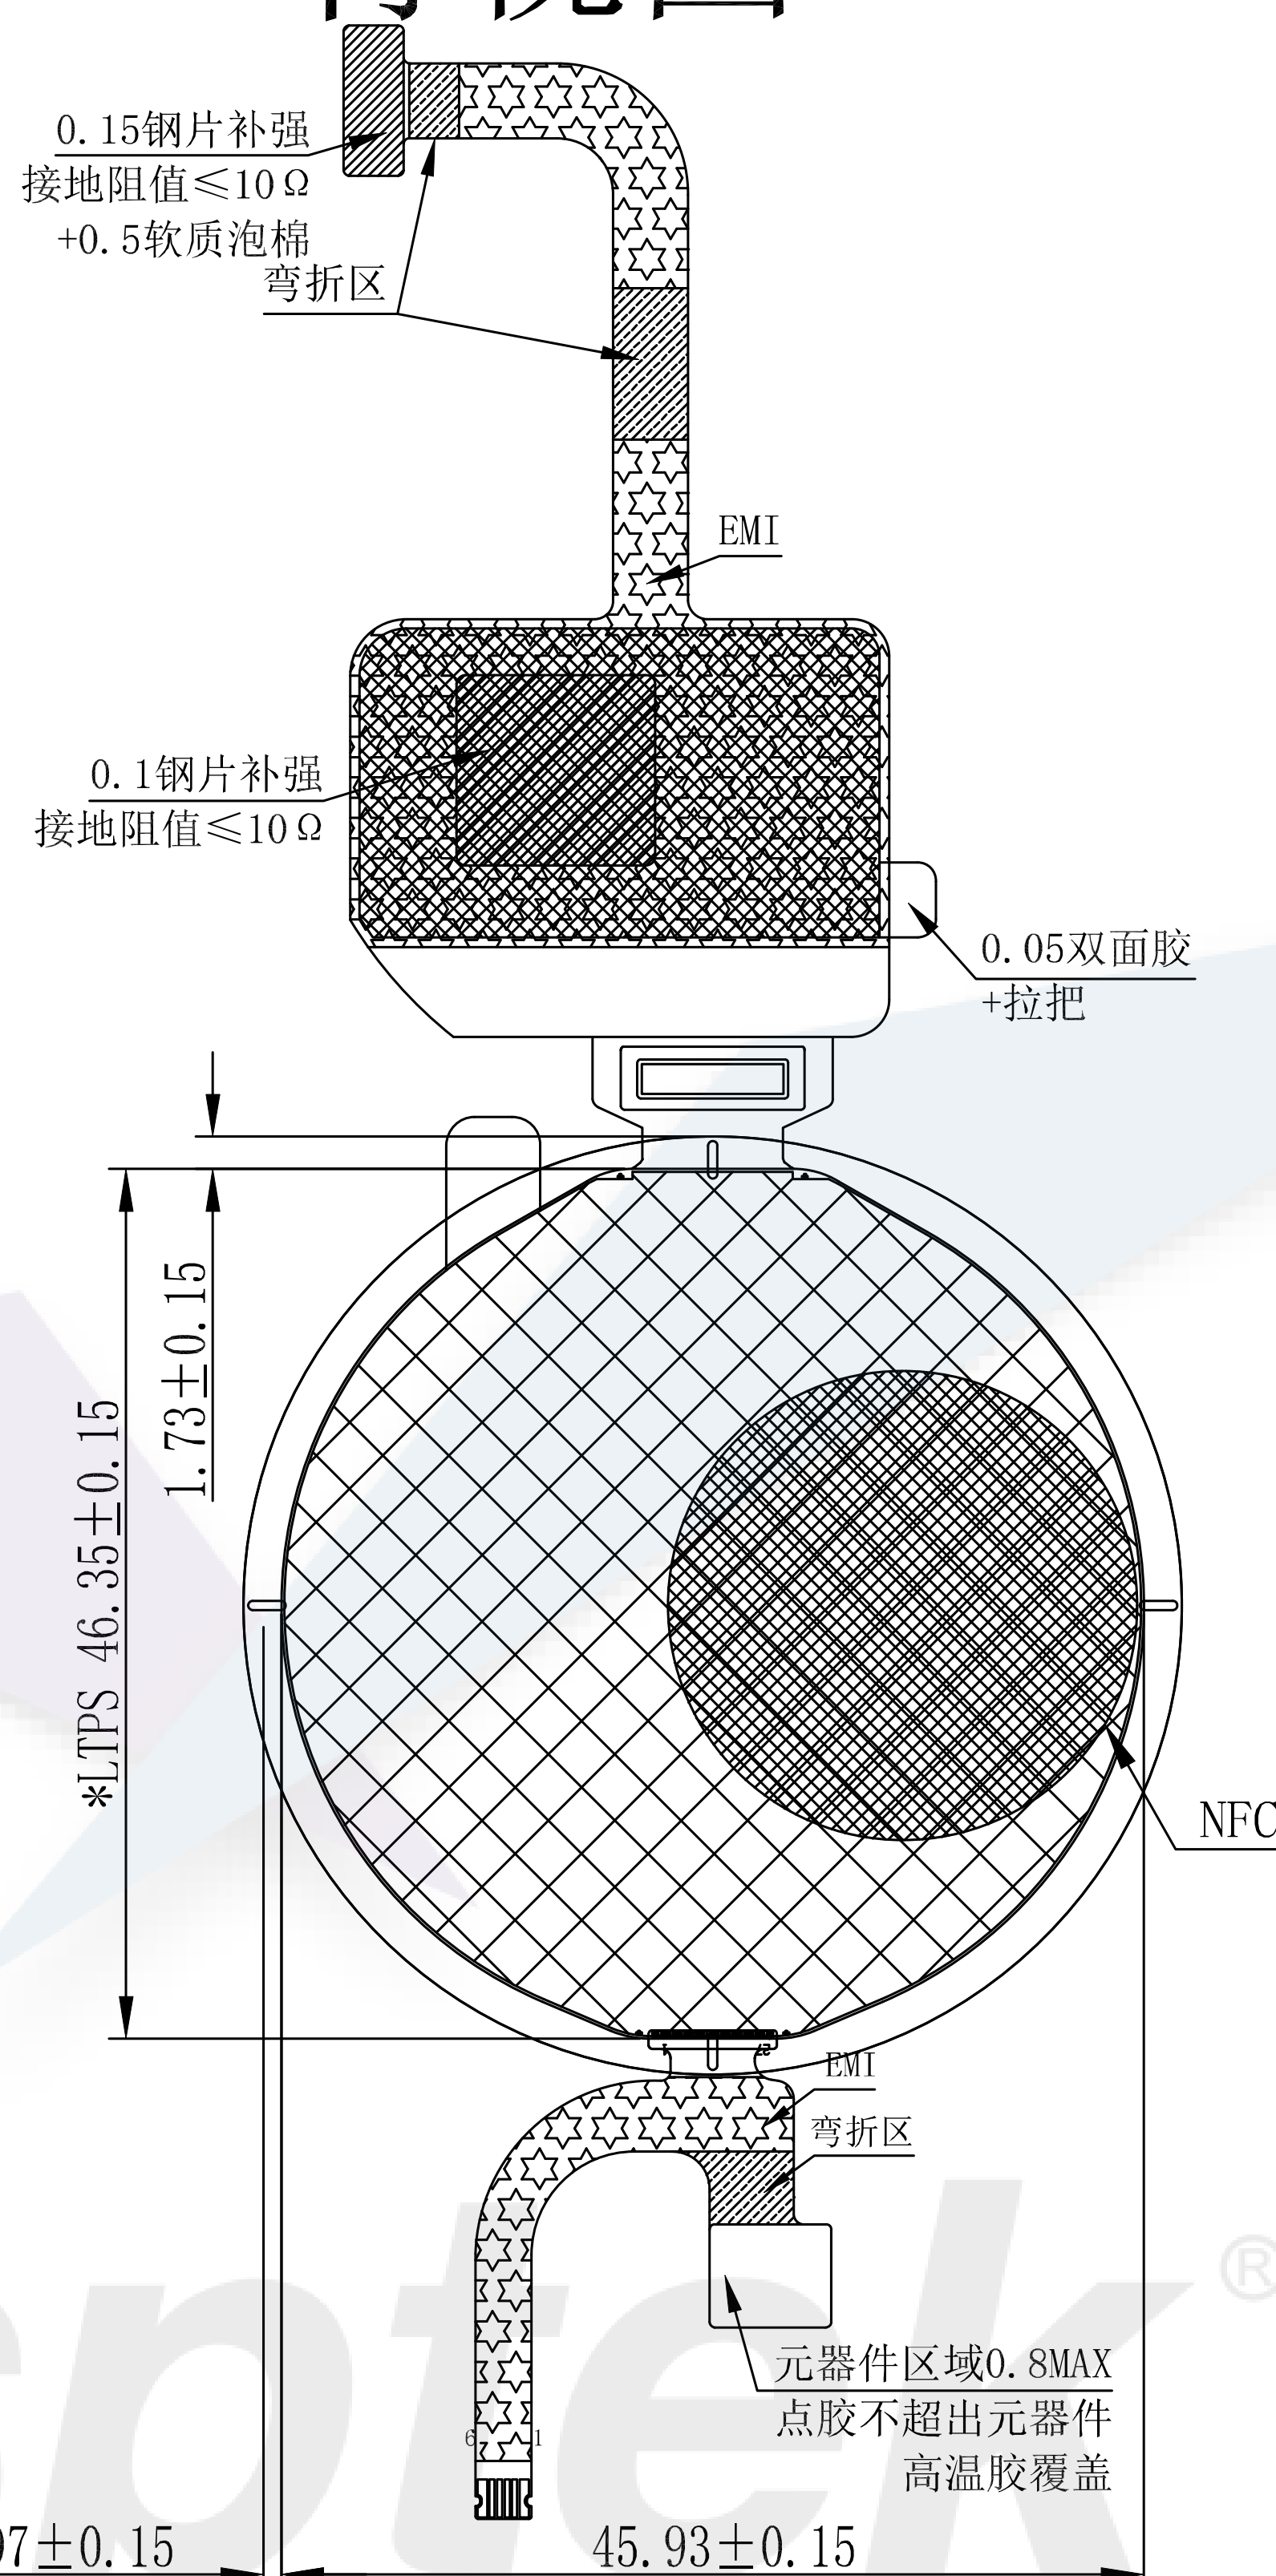

QSPI AMOLED	
Pin	DESCRIPTION
1	NC
2	LED+ (VBAT3.7)
3	VCI_EN
4	VDDIO1V8
5	VDD2V8
6	NC
7	MTP
8	RST
9	FMARK
10	GND
11	MDSI_CLKP
12	MDSI_CLKN
13	GND
14	MDSI_DOP
15	MDSI_DON
16	GND
17	MDSI_D1P_NC
18	MDSI_D1N_NC
19	GND
20	TP_VDD2V8 (CTP)
21	TP_RST1.8V
22	TP_SCL1.8V
23	TP_SDA1.8V
24	TP_INT1.8V

TP PIN DESCRIPTION	
TP	SYMBOL
1	TP_VDD
2	TP_INT
3	TP_SDA
4	TP_SCL
5	TP_RST
6	GND

NOTES:

- OPERATING TEMPERATURE: -10° C TO 60° C
- STORAGE TEMPERATURE: : -20° C TO 70° C
- DRIVING IC: C05300
TOUCH IC: CST9217
- DISPLAY MODE: AMOLED
- GENERAL TOLERANCE: ±0.20mm
() MEANS DIMENSION FOR REFERENCE
- SPECIAL REQUIRE: NO
- THE COLOR COORDINATES: X=0.30±0.03 ; Y=0.31±0.03
Brightness: 700 nits
- REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS .

弯折出货

深圳市鱼鹰光电科技有限公司						DRAWING No. : AM173M466466FLS2	
						DRAWING TITLE: 总成	
DESIGN	XW	CHECK		APPROVE		REV. : A	SCALE : -
DATE	25.11.10	DATE		DATE		PROJECTION:	UNIT : MM
							SHEET : 1/1